



STARTER PKZ2

Part no.

PKZ2

Article no.

026606



Powering Business Worldwide™

Delivery programme

Product range			PKZ2 basic unit up to 40 A - PRODUCT DISCONTINUATION IN 2012
Basic function			Motor protection System protection
Rated uninterrupted current	I_u	A	40
Pole			3 pole

Approvals


Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Specially designed for NA

UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
E36332
NLRV
12528
3211-05
UL listed, CSA certified
No

Technical data ETIM 4.0

Rated operation power at AC-3, 400 V		kWh	20
With integrated auxiliary switch			No
Rated permanent current I_u		A	40
With integrated under voltage release			No
Number of poles			3
Degree of protection (IP)			IP00
Connection type main current circuit			Screw connection

Dimensions

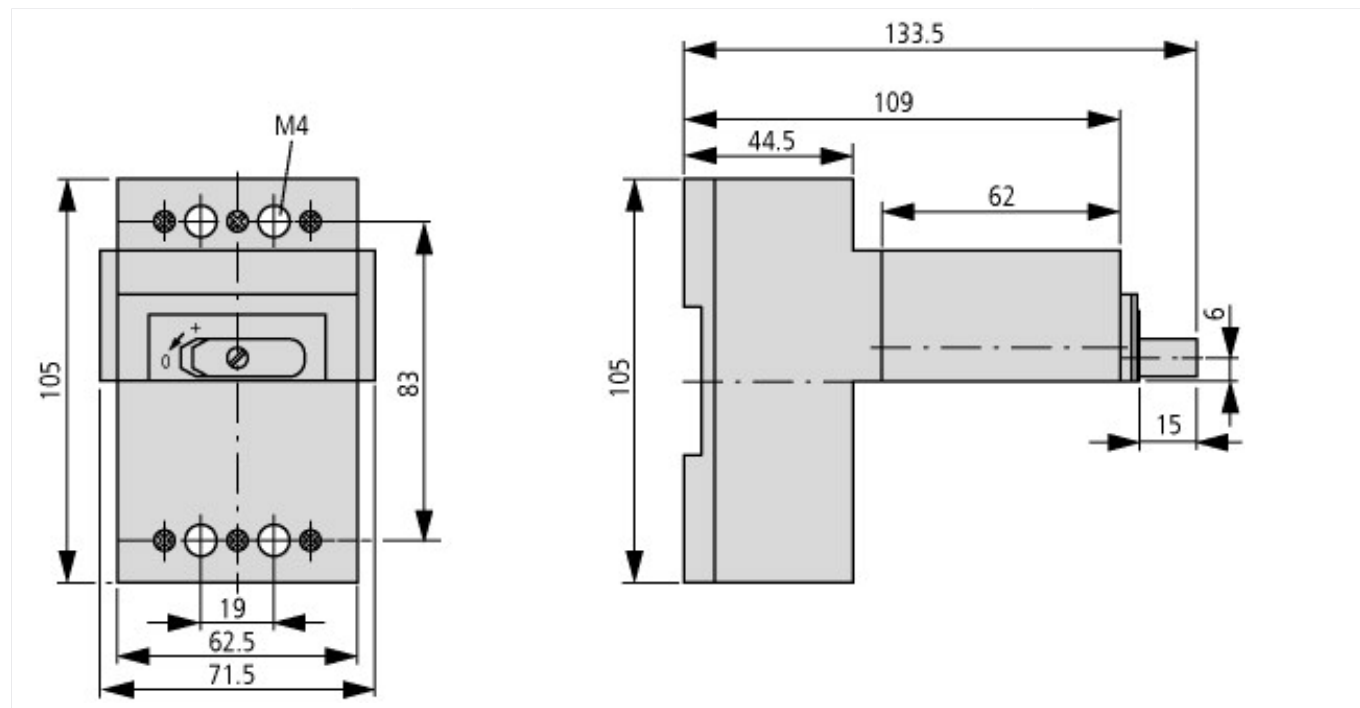

Additional product information (links)

AWA1280-0876 Motor-protective circuit-breaker	
	AWA1280-0876 Motor-protective circuit-breaker
AWB1210-1485 PKZ2 motor-protective circuit-breakers, overload monitoring of EEx e motors	
	AWB1210-1485 PKZ2 motor-protective circuit-breakers, overload monitoring of EEx e motors
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf

