

UNIVERSAL POWER SOURCE ALL FOREIGN LINE VOLTAGES TO 120 VOLTS, 50 OR 60 HERTZ





Universal Voltage Converters - Converts 100/120/220/240 volts to isolated 120V volts with optional foreign power IEC input cords to suit your use location.

FEATURES:

- Four convenient power sizes.
- IEC input port for foreign cords.
- Operates on 50 Hz and 60 Hz input with safety*.
- Isolated Output receptacle.
- Convenient on-off switch.

FOREIGN POWER SUPPLIES						
S E C T	Part Number	VA Output Maximum	Dimensions in inches			Wt. Lbs.
			Height	Width	Length	
A	75-100	100	4	5 1/8	7 3/8	8
	75-250	250	4	5 1/8	7 3/8	14
	75-500	500	5 1/8	7 1/8	8 1/8	26
	75-1000	1000	7 1/8	8	10	35
POWER CORDS MATCHED TO THE COUNTRY OF USE:						
	PartNo.	Amps	Country of use	Agency		
B	75C-37030	10	Asia	UL, CSA		
	75C-4100	10	Australia	EANSW		
	75C-2004	10	Britain	ASTA		
	75C-3300	10	Europe	KEMA, NEMKO, SEMKO		

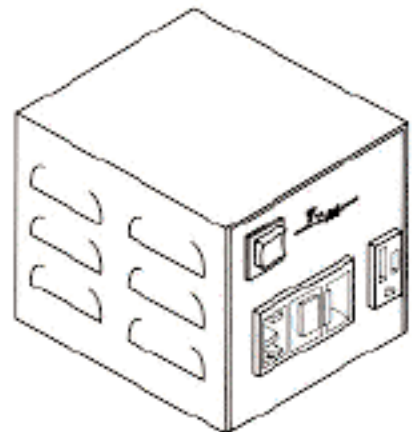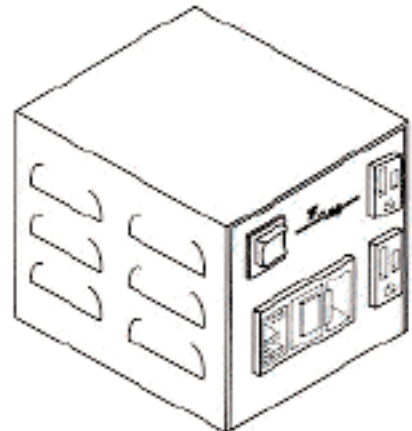

APPLICATIONS:

- Power for photographic/TV crews abroad.
- Power for international trade shows.
- Conversion for U.S. appliances in foreign use.

*NOTE: Unit does not change frequency.
Use only for equipment that can be operated on 50 Hz only, 60 Hz only, or 50/60 Hz.


75C-3300 10Amp "Schuko" European
(10A Version of above
both usable Brazil/Argentina)



75C-2004 10Amp United Kingdom BS1363
(will not mate w/BS546-
Standard Prior to 1954)



75C-4100 10Amp Australia/New Zealand



75C-37030 10Amp North American Nema 5-15
(Japan, Vietnam & Philippines)

