

## 3-polig, IP 66

### Schaltschrankeinbau mit Türkupplung




Entriegelungsstück zur Aufhebung der Türverriegelung siehe Seite 38.



| Dauerstrom<br>( $I_N/I_{th}$ ) | Schaltleistung<br>AC-23B (A) | Frontschild | Artikelnummer    | ab Lager<br>lieferbar |
|--------------------------------|------------------------------|-------------|------------------|-----------------------|
| <b>3-polig</b>                 | <b>3 x 400 V</b>             |             |                  |                       |
| 40 A                           | 15 kW                        | 88 x 88     | KG41B T203/12 VE | •                     |
| 63 A                           | 22 kW                        | 88 x 88     | KG64B T203/12 VE | •                     |
| 80 A                           | 30 kW                        | 88 x 88     | KG80 T203/12 VE  | •                     |
| 100 A                          | 37 kW                        | 88 x 88     | KG100 T203/12 VE | •                     |
| 125 A                          | 45 kW                        | 88 x 88     | KG125 T203/12 VE | •                     |
| 160 A                          | 55 kW                        | 88 x 88     | KG160 T203/12 VE | •                     |
| 200 A                          | 75 kW                        | 88 x 88     | KG210 T203/13 VE | •                     |
| 250 A                          | 90 kW                        | 88 x 88     | KG250 T203/13 VE | •                     |
| 315 A                          | 110 kW                       | 88 x 88     | KG315 T203/13 VE | •                     |
| 315 A                          | 132 kW                       | 88 x 88     | C316 T203/13 VE  | •                     |


| Dauerstrom<br>( $I_N/I_{th}$ ) | Schaltleistung<br>AC-23B (A) | Frontschild | Artikelnummer    | ab Lager<br>lieferbar |
|--------------------------------|------------------------------|-------------|------------------|-----------------------|
| <b>3-polig</b>                 | <b>3 x 400 V</b>             |             |                  |                       |
| 40 A                           | 15 kW                        | 88 x 88     | KG41B T103/12 VE | •                     |
| 63 A                           | 22 kW                        | 88 x 88     | KG64B T103/12 VE | •                     |
| 80 A                           | 30 kW                        | 88 x 88     | KG80 T103/12 VE  | •                     |
| 100 A                          | 37 kW                        | 88 x 88     | KG100 T103/12 VE | •                     |
| 125 A                          | 45 kW                        | 88 x 88     | KG125 T103/12 VE | •                     |
| 160 A                          | 55 kW                        | 88 x 88     | KG160 T103/12 VE | •                     |
| 200 A                          | 75 kW                        | 88 x 88     | KG210 T103/13 VE | •                     |
| 250 A                          | 90 kW                        | 88 x 88     | KG250 T103/13 VE | •                     |
| 315 A                          | 110 kW                       | 88 x 88     | KG315 T103/13 VE | •                     |
| 315 A                          | 132 kW                       | 88 x 88     | C316 T103/13 VE  | •                     |

Lochbild Frontschild

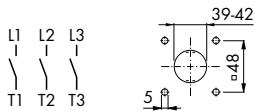


Lochbild Boden (Befestigung auf Normschiene bis KG100)


KG41B–KG100




KG125–C316



KG

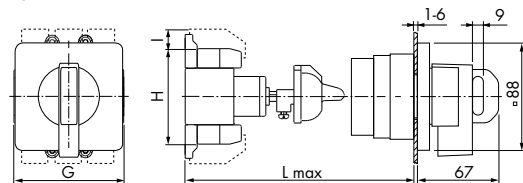

C316

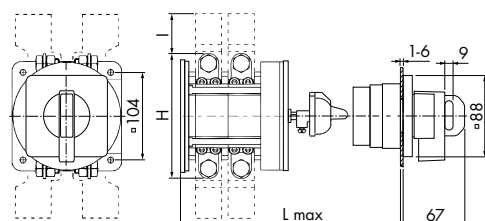

| Frontschild | Bügel-Ø | Anzahl Schlösser |
|-------------|---------|------------------|
| 48 x 48     | 7       | 3                |
|             | 5       | 4                |
|             | 8       | 3                |
| 64 x 64     | 5       | 4                |
| 88 x 88     | 9       | 4                |
| 130 x 130   | 9       | 4                |

|              | N   | P   | D3  |
|--------------|-----|-----|-----|
| KG41B, KG64B | 25  | 70  | 4,1 |
| KG80, KG100  | 25  | 90  | 5,2 |
| KG125, KG160 | 36  | 120 | 6,4 |
| KG210–KG315  | 44  | 142 | 6,4 |
| C316         | 104 | 104 | 7   |

|              | G   | H   | I  | L   |
|--------------|-----|-----|----|-----|
| KG41B        | 50  | 64  |    | 190 |
| KG64B        | 50  | 64  |    | 330 |
| KG80         | 70  | 80  |    | 380 |
| KG100        | 70  | 80  | 26 | 450 |
| KG125, KG160 | 112 | 108 | 26 | 450 |
| KG210–KG315  | 145 | 126 | 25 | 550 |
| C316         | 128 | 150 | 46 | 550 |

Informationen zu KG-Schaltern mit Bolzenanschlüssen finden Sie auf Seite 37.



3-polig



Komplett-/Lagergeräte