


Standard Miniature Toroidal Transformers

Features

- Dual 115V, 50/60 Hz Primaries for parallel or series connections
- Lower strayfield
- High efficiency
- Reduced standby current
- Small size and low weight
- Extremely low level of radiated magnetic field
- Very low induced noise (hum)
- Very low iron loss
- Test Voltage Primary - Secondary 4.0 KV
- 100% electrical and flash tested
- Ambient operating temp.: +60°C Max.
- Insulation system recognized for Class A (105°C) meets all requirements of Class E (120°C)
- Manufactured in an ISO 9001:2015 and ISO 14001:2015 certified Talema facility
- Fully RoHS & REACH Compliant

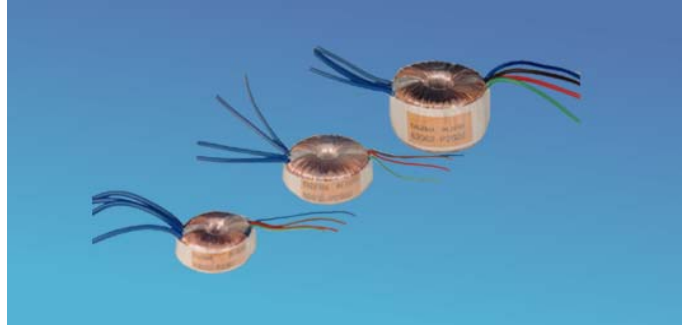

Standards


- High quality manufacturing and testing in accordance to EN61558, EN60950, EN60065 and BS415
- Tested and Approved by DEKRA to EN61558
- Recognized to UL5085, under family approval file E215495

Power VA	Part Number 2 x 115V Primary	Secondary Full Load Voltage V	Secondary Current mA	Open Circuit Voltage V
1.6	62000	2 x 7	114	2 x 8.9
	62001	2 x 9	89	2 x 11.6
	62002	2 x 12	67	2 x 15.4
	62003	2 x 15	53	2 x 19.3
	62004	2 x 18	44	2 x 23.4
	62005	2 x 22	36	2 x 28.2
3.2	62010	2 x 7	229	2 x 10.2
	62011	2 x 9	178	2 x 13.0
	62012	2 x 12	133	2 x 17.3
	62013	2 x 15	107	2 x 21.4
	62014	2 x 18	89	2 x 25.7
	62015	2 x 22	73	2 x 30.5
5.0	62020	2 x 7	357	2 x 9.7
	62021	2 x 9	278	2 x 12.4
	62022	2 x 12	208	2 x 17.0
	62023	2 x 15	167	2 x 21.3
	62024	2 x 18	139	2 x 25.5
	62025	2 x 22	114	2 x 30.5
7.0	62030	2 x 7	500	2 x 9.5
	62031	2 x 9	389	2 x 12.2
	62032	2 x 12	292	2 x 16.2
	62033	2 x 15	233	2 x 20.3
	62034	2 x 18	194	2 x 24.3
	62035	2 x 22	159	2 x 29.7
10	62040	2 x 7	714	2 x 8.3
	62041	2 x 9	556	2 x 10.8
	62042	2 x 12	417	2 x 14.4
	62043	2 x 15	333	2 x 18.0
	62044	2 x 18	278	2 x 21.7
	62045	2 x 22	227	2 x 26.3


Power VA	Part Number 2 x 115V Primary	Secondary Full Load Voltage V	Secondary Current mA	Open Circuit Voltage V
15	62050	2 x 7	1071	2 x 8.9
	62051	2 x 9	833	2 x 11.1
	62052	2 x 12	625	2 x 14.8
	62053	2 x 15	500	2 x 18.5
	62054	2 x 18	417	2 x 22.2
	62055	2 x 22	341	2 x 27.2
25	62060	2 x 7	1785	2 x 8.3
	62061	2 x 9	1377	2 x 10.7
	62062	2 x 12	1041	2 x 14.2
	62063	2 x 15	832	2 x 17.8
	62064	2 x 18	694	2 x 21.4
	62065	2 x 22	568	2 x 26.2
35	62070	2 x 7	2500	2 x 8.2
	62071	2 x 9	1944	2 x 10.6
	62072	2 x 12	1458	2 x 14.0
	62073	2 x 15	1166	2 x 17.6
	62074	2 x 18	972	2 x 20.9
	62075	2 x 22	795	2 x 25.7
50	62080	2 x 7	3571	2 x 8.1
	62081	2 x 9	2777	2 x 10.4
	62082	2 x 12	2083	2 x 13.8
	62083	2 x 15	1666	2 x 17.3
	62084	2 x 18	1388	2 x 20.7
	62085	2 x 22	1136	2 x 25.4

Standard Miniature Toroidal Transformers

Mechanical Drawing - 620xx Series (2x115V Primary)

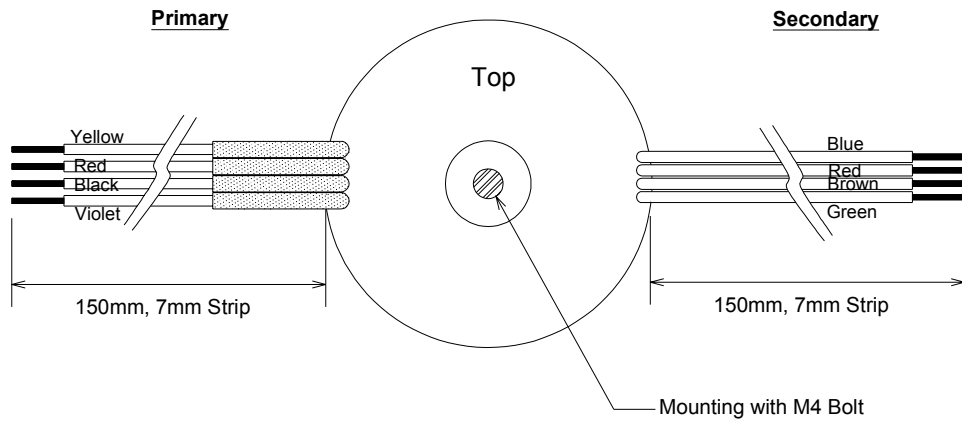

Schematic

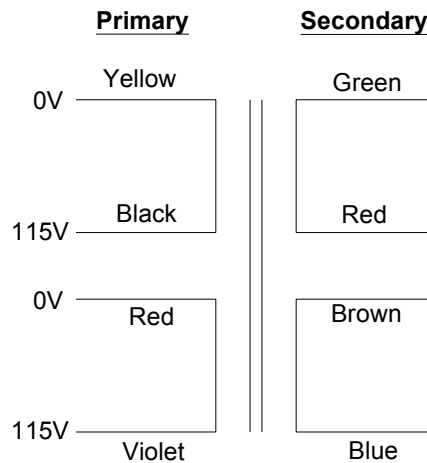

Standard Output (Electrical measurements @ 20°C ambient temperature)

Power VA	Dimensions OD x ID x H mm	Weight grams	No Load Regulation Delta Volts (%)	Delta Temp Â °C	Efficiency %	No Load mA (typ.)	230V Fuse mA	Secondary Power (Max.)				
								VA	Delta Volts Sec. %	Delta Temp Â °C	Efficiency %	Rec. Fuse mA
1.6	37.5x7.0x17.0	71	29	10	77	1.0	32	2.0	60	30	60	32
3.2	42.0x7.0x17.5	89	41	20	70	1.5	32	3.7	80	40	50	50
5.0	47.0x6.0x18.0	115	45	29	70	2.0	50	5.5	80	40	50	63
7.0	47.0x6.8x21.5	145	34	25	74	3.0	63	7.5	70	40	60	80
10	53.5x6.8x23.5	216	20	24	82	3.0	80	12.0	60	45	60	100
15	57.5x7.0x24.0	262	23	27	81	4.0	100	16.0	60	40	65	125
25	58.0x13.8x34.5	388	19.0	28	84	5.0	160	—	—	—	—	—
35	72.0x17.0x33.5	453	17.7	31	85	7.0	200	—	—	—	—	—
50	78.0x22.5x35.0	670	15.5	30	86	8.0	315	—	—	—	—	—

Regional Locations - Design, Manufacturing, Sales & Marketing

Talema Group Regional Offices

North America

United States (Sales & Marketing)

Talema Group, LLC
PO Box 935
900 Innovation Drive
Suite 120, Rolla
Missouri 65402
Tel: +1 573-303-3675
E-Mail: sales@talemagroup.com
Web: www.talema.com

Asia

India (Design, Manufacturing, Sales & Marketing)

Administrative Office
Talema Electronic India Private Limited
Door No. 221, 1st and 2nd Floor
KJ Plaza, Opp.to Vidya Mandir School
Meyanoor Main Road
Salem - 636 004 Tamil Nadu INDIA
Tel: +91 427 - 243 3100
Fax: +91 427 - 243 3109
E-Mail: talema@talemaindia.net
Web: www.talema.com

Factory Premises
Talema Electronic India Private Limited
Plot Nos. 30, 31 Electrical and Electronic
Industrial Estate
Suramangalam
Salem - 636 005 Tamil Nadu INDIA
Tel: +91 427 - 243 3000
E-Mail: talema@talemaindia.net
Web: www.talema.com

Europe

Germany (Design, Sales & Marketing)

Talema Elektronik GmbH
Sembdnerstr. 5
82110 Germering
Tel: +49 89 - 841 00 - 0
Fax: +49 89 - 841 00 25
E-Mail: info@talema.de
Web: www.talema.com

Ireland (Design, Sales & Marketing)

Nuvotem TEO
Units W & X, Gweedore Business Park
Derrybeg, Letterkenny, Co. Donegal
Tel: +353 (0) 74 95 48666
Fax: +353 (0) 74 95 48139
E-Mail: info@nuvotem.com
Web: www.nuvotem.com

Czech Republic (Design, Manufacturing, Sales & Marketing)

NT Magnetics s.r.o.
Chebská 27
322 00 Plzeň
Tel: +420 377 - 338 351
Fax: +420 377 - 338 350
E-Mail: talema@talema.cz
Web: www.ntmagnetics.cz

Locations of Talema Group Regional Offices

