



WR868

868 MHz Stubby Antenna

Features

- ◆ Groundplane Dependent
- ◆ Covers 868 and 915 MHz bands
- ◆ SMA-Male Right Angle Connector
- ◆ Ideal for fixed and mobile terminals

Specifications

Specifications	
Radiating element	1/4 Wave Element
Frequency range	868 MHz, 915 MHz
Peak gain	1.0 dBi
Polarisation	Linear
Return loss	-17 dB
Power rating	10W
Connector	SMA-Male Right Angle
Dimensions	54 x 8mm (plus connector)


Popular Ordering Options

FWR835021-SM-RA	WS868 with SMA-Male RA connector
-----------------	----------------------------------


Specifications subject to change without notice.

WR868 | 868 MHz Stubby Antenna

Return Loss

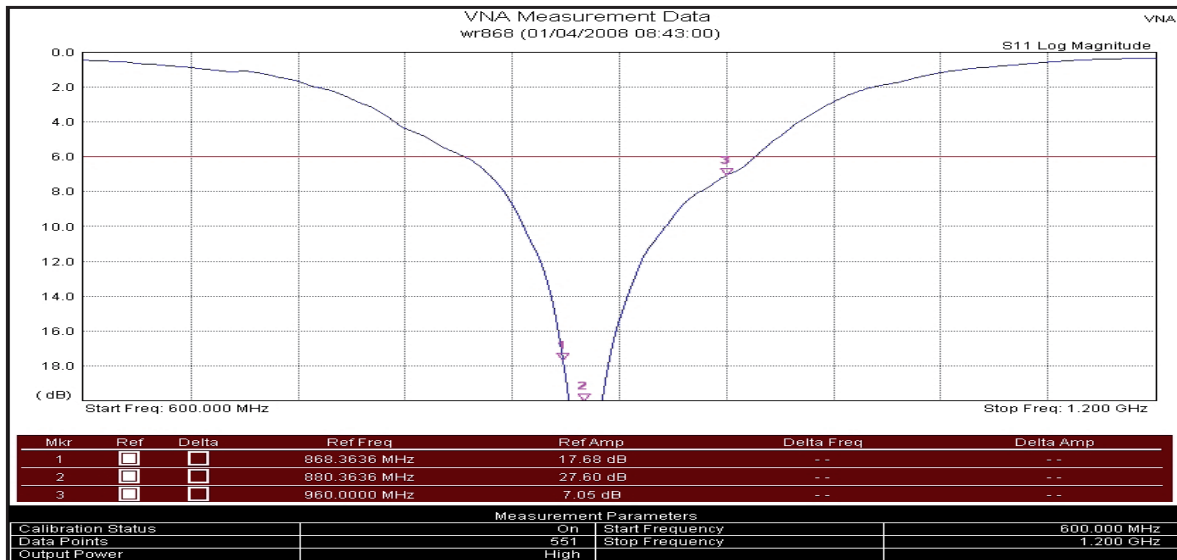

Outline Drawing

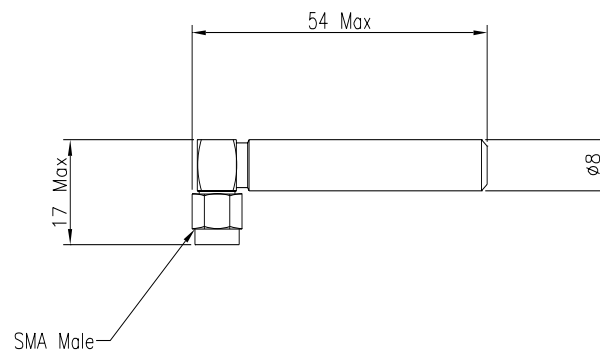

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com