

TouchBoard G80-11900



Models may vary from the image shown

Compact keyboard with built-in touchpad

The multifunctional TouchBoard is the perfect solution for limited spaces in situations requiring the functions of a "mouse". Particularly in hard industrial applications, the Cherry keyboard shows what she is made of. The model combines outstanding quality with long service life and precise, easy-to-operate touchpad.

Key benefits

- Individual keys with Gold Crosspoint contacts (MX technology)
- Designed for continuous usage - over 50 mill. confirmations per key
- Robust and reliable
- Space-saving and ergonomic
- Ideal for limited space and 19" applications
- Can be used with the standard drivers of the operating system
- USB keyboard: the following keys can be programmed freely using KeyM@n software (software macros) in 3 levels (single confirmation in combination with "CTRL", in combination with "SHIFT"): function keys "F1"-"F12", "INSERT", "DELETE", "POSITION1", "END", "PAGE-UP", "PAGE-DOWN", "PRINT", "PAUSE", comma and zero in the numeric field.

Technical Data:

Layout (country or language):

Product dependant, see table "Models"

Housing colour:

Product dependant, see table "Models"

Key colour:

Product dependant, see table "Models"

Weight (product):

approx. 1000 g

Total weight (with packaging):

approx. 1200 g

Cable Length:

approx. 1.75 m

Storage Temperature:

-20°C to 60°C

Operating Temperature:

0°C to 50°C

Current Consumption:

Product dependant, see table "Models"

Interface:

Product dependant, see table "Models"

Product approvals:

Product dependant, see table "Models"

System requirements:

Product dependant, see table "Models"

Delivery Volume:

Product dependant, see table "Models"

Dimensions (product):

approx. 415 x 193 x 37 mm

Packaging dimensions:

approx. 447 x 250 x 45 mm

Reliability:


- MCBF > 10 bill. operations
- MTBF > 874,000 hours

Touchpad:

- Resolution: 1000 dpi
- Number of Keys: 2

Keyboard:

- Key technology: MX
- Service life, standard key: > 50 million key operations
- Operation characteristics: BLACK SWITCH Linear (60 cN)

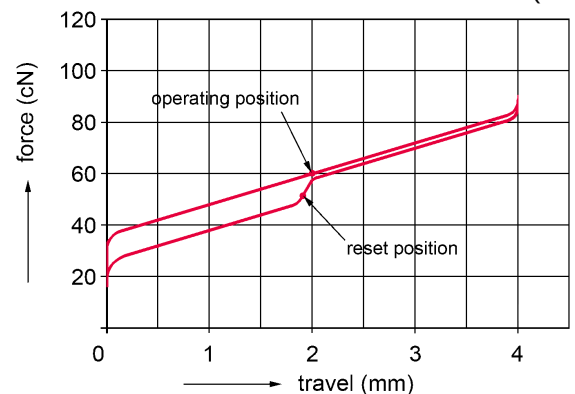

- Inscription technology: Laser

- Inscription layout: Standard

- Number of Keys: Product dependant, see table "Models"

Packaging Unit:

- Number of products in the master package: 66
- Number of master packages per pallet: 2

Warranty:

2 years

Errors, technical changes and delivery possibilities excepted.
Technical information refers only to the specifications of the
products. Features may differ from the information provided.

Models:

(possible country/layout versions, others available on request)

	Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
1	TouchBoard G80-11900	G80-11900LPMUS-0	US English	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
2	TouchBoard G80-11900	G80-11900LPMUS-2	US English	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy	104
3	TouchBoard G80-11900	G80-11900LTMDE-0	Germany	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
4	TouchBoard G80-11900	G80-11900LTMDE-2	Germany	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
5	TouchBoard G80-11900	G80-11900LTMEU-0	US English with EURO symbol	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
6	TouchBoard G80-11900	G80-11900LTMEU-2	US English with EURO symbol	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
7	TouchBoard G80-11900	G80-11900LTMFR-0	France	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
8	TouchBoard G80-11900	G80-11900LTMFR-2	France	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	105
9	TouchBoard G80-11900	G80-11900LTMUS-0	US English	light grey	light grey	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104

	Product name	Order number	Layout (country or language)	Housing colour	Key colour	Current Consumption	Interface	Product approvals	System requirements	Delivery Volume	Number of Keys
10	TouchBoard G80-11900	G80-11900LTMUS-2	US English	black	black	typ. 35 mA (keyboard), typ. 3 mA (touchpad)	PS/2 (keyboard), PS/2 (mouse, trackball, touchpad)	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE, BSMI	PS/2 connections for keyboard and mouse	Operating instructions in hard copy, Adapter PS/2 to DIN(AT), Adapter PS/2 to RS 232	104
11	TouchBoard G80-11900	G80-11900LUMBE-0	Belgium	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
12	TouchBoard G80-11900	G80-11900LUMBE-2	Belgium	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
13	TouchBoard G80-11900	G80-11900LUMCH-0	Switzerland	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
14	TouchBoard G80-11900	G80-11900LUMCH-2	Switzerland	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
15	TouchBoard G80-11900	G80-11900LUMDE-0	Germany	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
16	TouchBoard G80-11900	G80-11900LUMDE-2	Germany	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
17	TouchBoard G80-11900	G80-11900LUMES-0	Spain	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
18	TouchBoard G80-11900	G80-11900LUMES-2	Spain	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
19	TouchBoard G80-11900	G80-11900LUMEU-0	US English with EURO symbol	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
20	TouchBoard G80-11900	G80-11900LUMEU-2	US English with EURO symbol	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	104
21	TouchBoard G80-11900	G80-11900LUMFR-0	France	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
22	TouchBoard G80-11900	G80-11900LUMFR-2	France	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
23	TouchBoard G80-11900	G80-11900LUMGB-0	UK	light grey	light grey	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105
24	TouchBoard G80-11900	G80-11900LUMGB-2	UK	black	black	max. 100 mA	USB	cURus, c-tick, VCCI, CE, FCC, ÜG-VDE	USB connection	Operating instructions in hard copy	105