


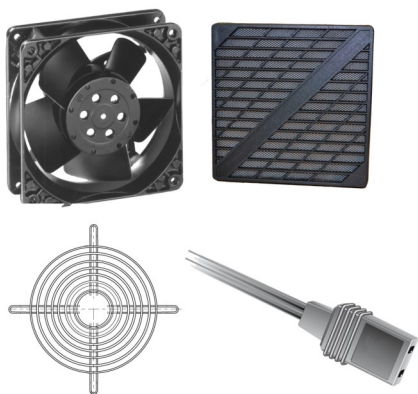

Compact Fan Kits

Kits incorporating a range of AC fans, a power lead and either a metal guard or an air filter option.

- 230V fans
- Can be operated at 50 or 60Hz
- Metal fan housings
- IP20 Protection
- Lead 610mm
- Filter pads that can be changed without switching off the fan

Part Number	Airflow	Airflow	Noise	Bearings	Power	Speed	Temperature Range	Length	Width	Depth	Fan Type	Lead	Guard	Filter
	M3/h	CFM	dB(A)		W	RPM	°C	mm	mm	mm				
3956-KF0	59	34.7	35	BB	11.0	2650	-40...+80	92	92	38	3956	LZ120	LZ23K	-
3956-KF1	59	34.7	35	BB	11.0	2650	-40...+80	92	92	38	3956	LZ120	-	PMFA90
9956L-KF0	84	49.4	29	BB	9.5	1850	-40...+80	119	119	25	9956L	LZ120	LZ30K	-
9956L-KF1	84	49.4	29	BB	9.5	1850	-40...+80	119	119	25	9956L	LZ120	-	PMFA120T
9956-KF0	117	68.9	37	BB	14.0	2450	-40...+70	119	119	25	9956	LZ120	LZ30K	-
9956-KF1	117	68.9	37	BB	14.0	2450	-40...+70	119	119	25	9956	LZ120	-	PMFA120T
4890N-KF0	80	47.1	25	SB	11.0	1550	-10...+70	119	119	38	4890N	LZ120	LZ30K	-
4890N-KF1	80	47.1	25	SB	11.0	1550	-10...+70	119	119	38	4890N	LZ120	-	PMFA120T
4850N-KF0	100	58.9	32	SB	10.0	1800	-10...+70	119	119	38	4850N	LZ120	LZ30K	-
4850N-KF1	100	58.9	32	SB	10.0	1800	-10...+70	119	119	38	4850N	LZ120	-	PMFA120T
4650N-KF0	160	94.2	46	SB	19.0	2650	-10...+55	119	119	38	4650N	LZ120	LZ30K	-
4650N-KF1	160	94.2	46	SB	19.0	2650	-10...+55	119	119	38	4650N	LZ120	-	PMFA120T
4656N-KF0	160	94.2	47	BB	19.0	2650	-40...+85	119	119	38	4656N	LZ120	LZ30K	-
4656N-KF1	160	94.2	47	BB	19.0	2650	-40...+85	119	119	38	4656N	LZ120	-	PMFA120T
5656S-KF0	235	138.3	46	BB	30.0	2700	-35...+70	135	135	38	5656S	LZ120	LZ25	-