

Wall Mount Socket

pro-POWER




Features:

- In compliance with EN 60309-1 and EN 60309-2 standards
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- Spring lid, entry with threaded grommet (replaceable with a cable gland)

Specifications:

Series	: PE16_pp
Gender	: Receptacle
Connector Mounting	: Panel
Contact Termination	: Screw
Connector Type	: Standard Power Entry
Mounting Type	: Wall
No. of Outlets	: 1

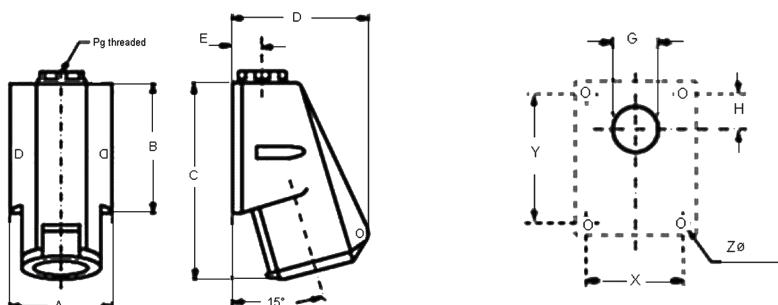

20mm Hole Diameter on 16A
25mm Hole Diameter on 32A

Dimensions

Current Rating (A)	Poles	A	B	C	D	E	G	H	X	Y	PgØ	ZØ
16	2P + $\frac{1}{2}$	70	82	126	92	20	Ø22	16	53	65	16	4.5
	3P + $\frac{1}{2}$				99	13						
	3P + N + $\frac{1}{2}$											
32	2P + $\frac{1}{2}$	86	104	159	110	24	Ø28	17	61	79	21	6.5
	3P + $\frac{1}{2}$											
	3P + N + $\frac{1}{2}$											

Dimensions : Millimetres

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-POWER

Wall Mount Socket

pro-POWER

Part Number Table

Description	No. of Positions	Part Number
Socket, 110V, Wall Mount	2P + E	PE1643PPB
Socket, 240V, Wall Mount	2P + E	PE1663PPB
Socket, 415V, Wall Mount	3P + E	PE1664PPB
Socket, 415V, Wall Mount	3P + N + E	PE1665PPB
Socket, 240V, Wall Mount	2P + E	PE3263PPB
Socket, 415V, Wall Mount	3P +N + E	PE3265PPB

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.