

BUCHANAN WIREMATE CONNECTOR

VERTICAL POKE-IN SERIES

TE Connectivity (TE)'s BUCHANAN WireMate connectors vertical poke-in series are now offered in tray packaging for pick and place insertion for LED driver applications. The in-line connectors are available in 2 & 3 positions. The vertical poke-in connectors can also be offered in tray packaging. They are available in 2, 4 & 6 staggered positions. Compatible in potable and non-potable applications, with printed circuit board wave solder processes, the connectors supports insertion of stripped solid conductor wire without special tooling. Designed for permanent connections within OEM assemblies, wire is securely held in place but can be removed with an extraction tool, if required.

ELECTRICAL

- Current Rating: 6A Max (UL)
- Voltage Rating: 600 VAC Max
- Dielectric Strength: 2200 VAC

MECHANICAL

- Wire Retention: 5 lb. (22.25 N)
- Durability: 5 cycles
- Pitch: 138 (3.5mm) staggered centerline .322(8.2mm)in-line centerline

MATERIALS

- Housing: High temperature resistant thermoplastic
- Contact: Copper alloy, tin over nickel plating

STANDARDS & SPECIFICATIONS

- Application Specifications:
[114-13075](#) Vertical Poke-In
[114-13223](#) In-Line Poke-In
- Product Specifications:
[108-2059](#) Vertical Poke-In
[108-2059-1](#) In-Line Poke-In
- UL 1977

BENEFITS

- Significantly reduces the need to hand solder or fixture and wave-solder wires directly to printed circuit board
- In-line screwless version terminates industry standard 18 AWG solid wire
- Staggered versions terminate industry standard 18-16 AWG solid wire and 18 AWG bonded wire
- Thru-hole solder mount with retention features integral to solder legs for PCB retention 2 & 4 position staggered and in-line versions have secondary board locks for additional retention
- Now available in tray packaging (2 & 3 position In-Line Screwless connectors only)

APPLICATIONS



Lighting Ballast and
LED Drivers



Garage
Door Openers



Security Systems



HVAC Controls



Vending and
Gaming Products


BUCHANAN WIREMATE CONNECTOR VERTICAL POKE-IN SERIES

PRODUCT SELECTION INFORMATION


Part Number	Description
1-2213629-2	2 Position Vertical Poke-In Connector In Pocket Trays
2213629-3	3 Position Vertical Poke-In Connector In Pocket Trays
1-2008552-2	2 Position In-Line Poke-In Wire Connector
2008552-3	3 Position In-Line Poke-In Wire Connector
1811957-1	2 Position Vertical Poke-In Wire Connector with Boardlock
1811444-1	4 Position Vertical Poke-In Wire Connector
1811398-1	6 Position Vertical Poke-In Wire Connector

DIMENSIONS


2 position in-line screwless wire connector3

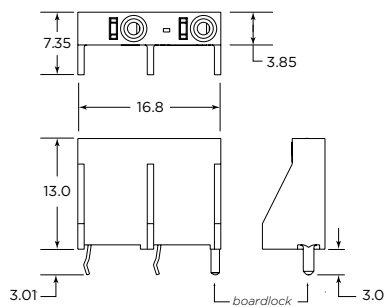


position in-line screwless wire connector

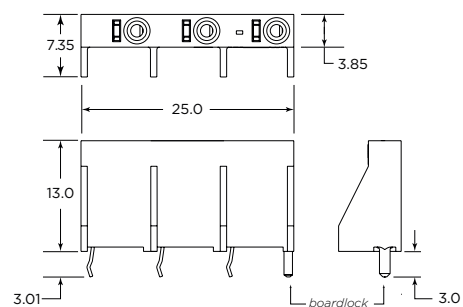

2 position screwless wire connector4



& 6 position screwless wire connector

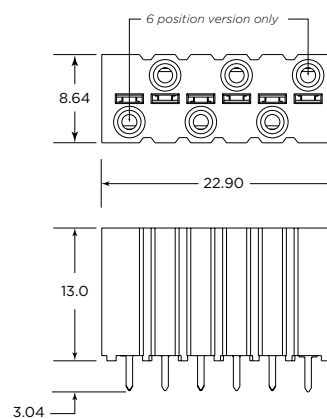

Connect With Us

We make it easy to connect with our experts and are ready to provide all the support you need. Visit te.com/support to chat with a Product Information Specialist.

te.com/buchanan-wire-mate-connectors

BUCHANAN, WireMate, TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

© 2025 TE Connectivity. All Rights Reserved.

06-25