




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

LUG SIDE
(MOMENTARY POSITION)

CENTER
(MAINTAINED POSITION)


OPPOSITE LUG
(MOMENTARY POSITION)

10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

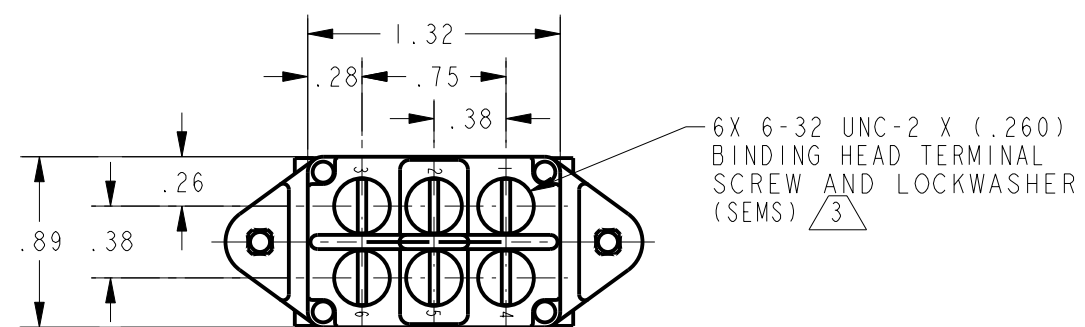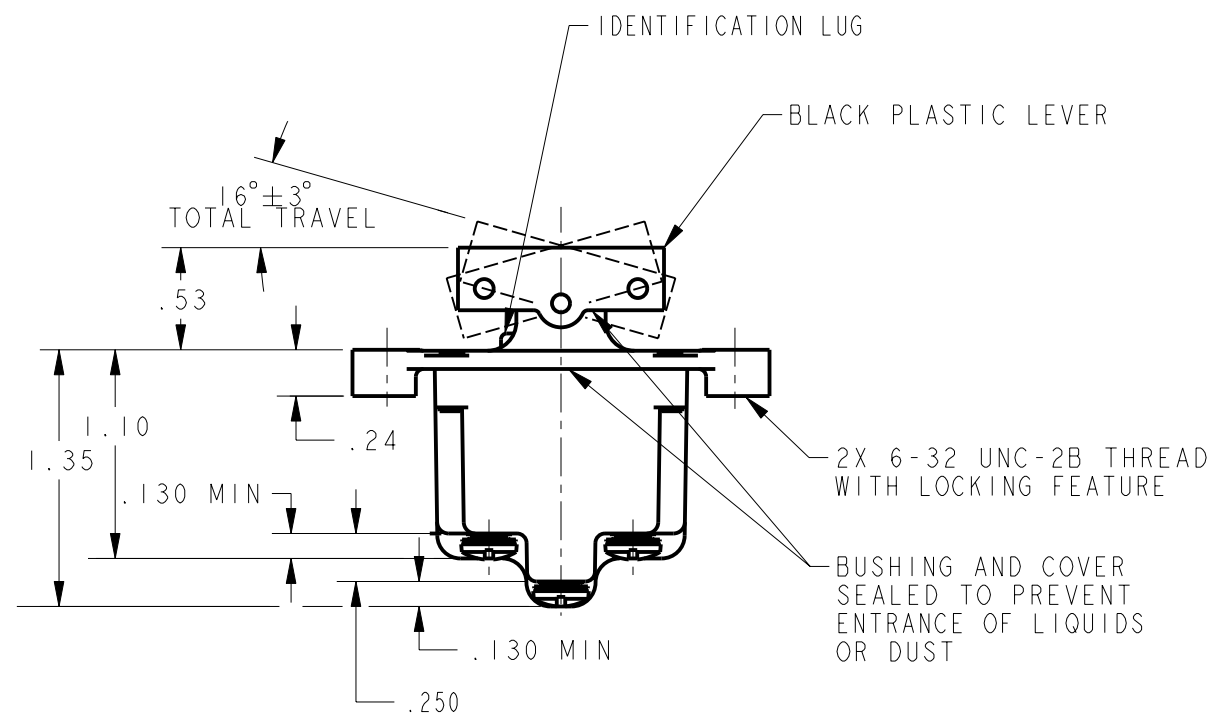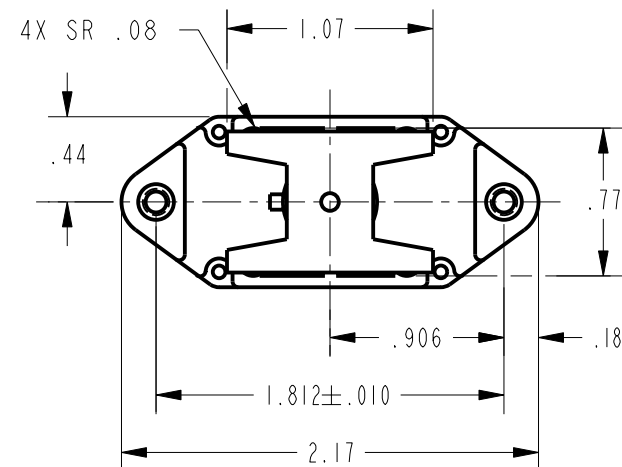

- 1 - SWITCH WILL WITHSTAND TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - SCREWS FURNISHED UNASSEMBLED

RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			AC VOLTS		28 VDC	125 VAC	28 VDC	125 VAC
28	125	250	125	250				
18	.75	.5	11	6	5	2	10	8



SCALE	FULL
-------	------

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .14 LB EST

ANSI Y14.5M-1982 APPLIES