
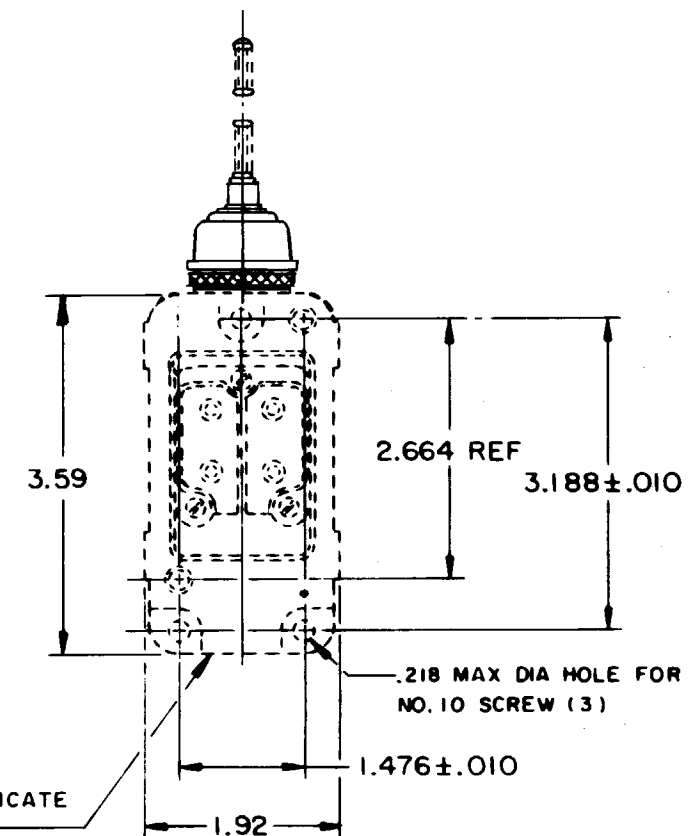
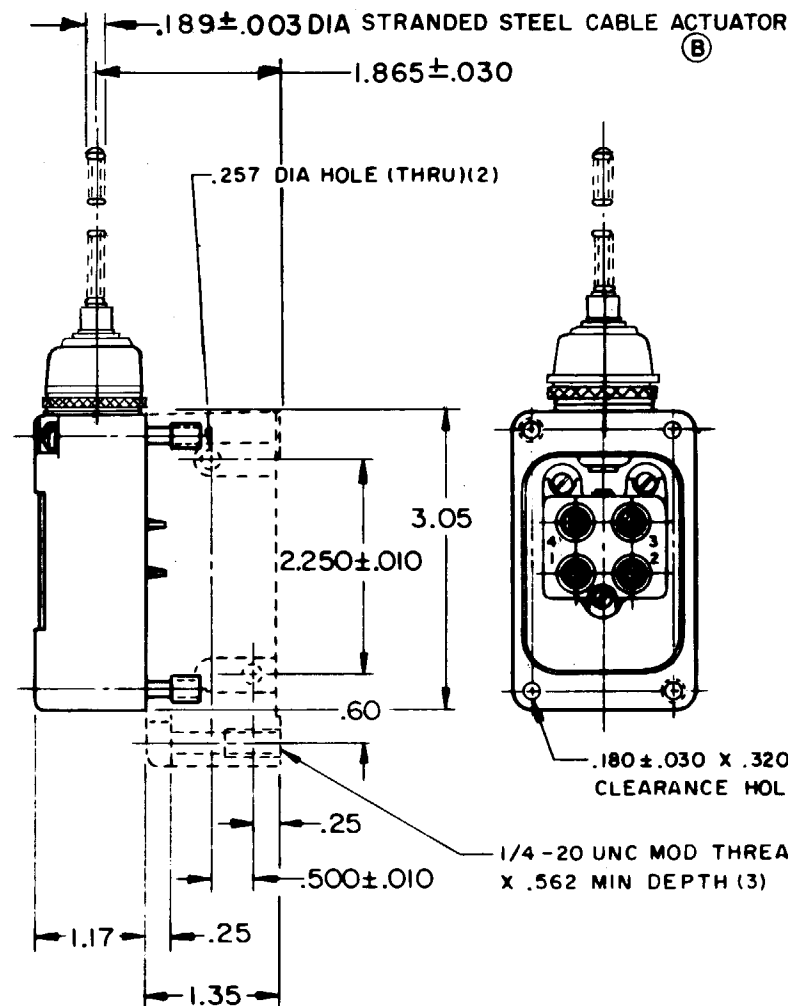
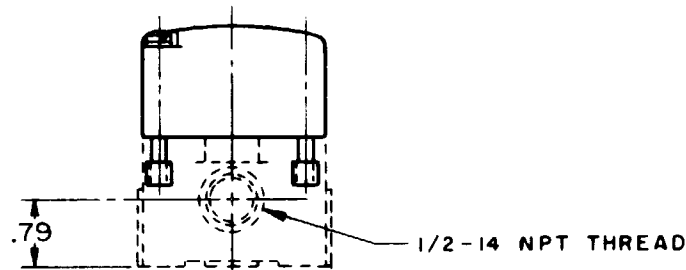
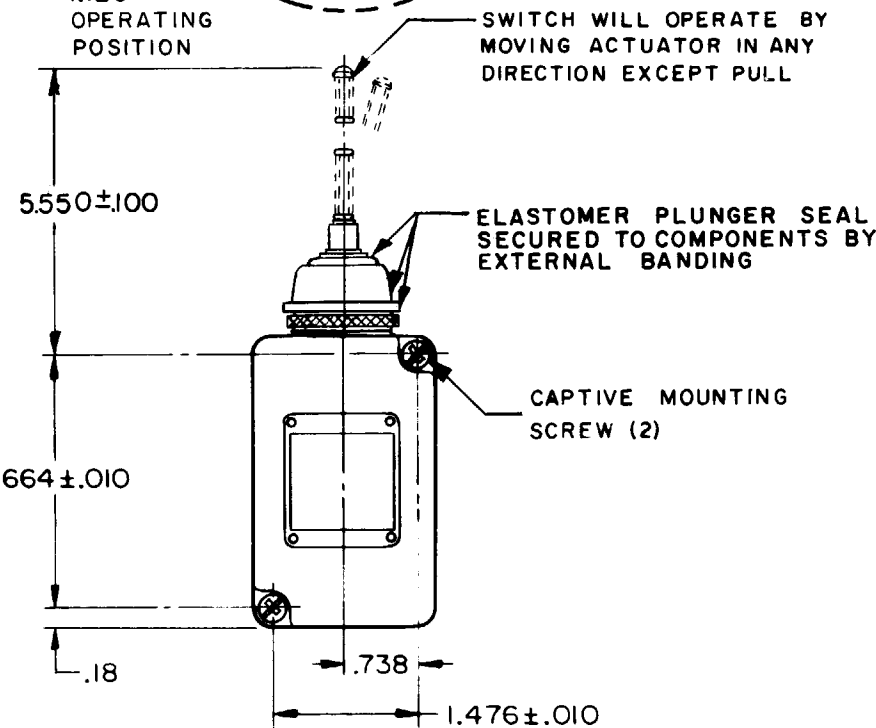
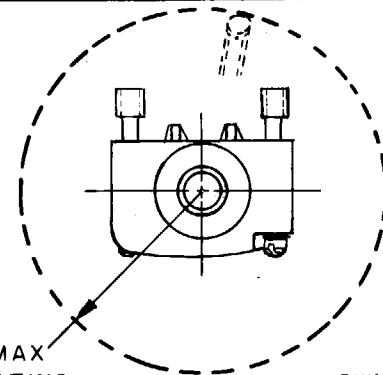


# SWITCH - ENCLOSED

CATALOG LISTING  
**208LS1**

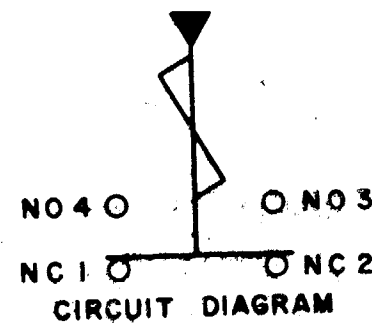

DOTTED LINES INDICATE 18 PAI IN PLACE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

| CHARACTERISTICS                       |
|---------------------------------------|
| OPERATING FORCE - - - - - 5 OZ MAX    |
| FORCE AT 2.0 - - - - - 10 OZ MAX      |
| SWITCH - BASIC REPLACEMENT - - - 2MN9 |

| ELECTRICAL DATA                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------|
| CONTACT ARRANGEMENT<br>(SEE CIRCUIT DIAGRAM)                                                                                               |
| 10A-120, 240, OR 480 VAC; 1/4 HP - 120 VAC<br>1/2 HP - 240 VAC; 0.8A - 115 VDC; 0.4A - 230 VDC<br>.1A - 550 VDC<br>PILOT DUTY: 600 VAC MAX |

|                                                    |
|----------------------------------------------------|
| SCALE 1/2 TO 1                                     |
| DO NOT SCALE PRINT                                 |
| UNLESS OTHERWISE NOTED<br>DIMENSIONS ARE IN INCHES |
| <b>TOLERANCES ARE:</b>                             |
| ONE PLACE (.0) ±.030                               |
| TWO PLACE (.00) ±.015                              |
| THREE PLACE (.000) ±.008                           |
| ANGLES ±                                           |
| WEIGHT                                             |