





DUAL-IN-LINE SOCKETS

SERIES 117, 127, 217, 227, 317, 327 • SHRINK DIP, SOLDER TAIL & WRAPOST

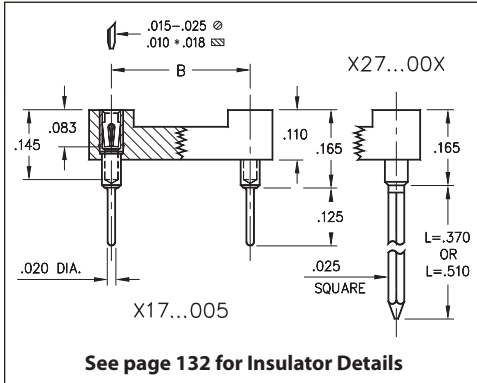

- High density DIP sockets and strips for devices featuring .070" lead spacing
- Solder tails use MM #1802 receptacles, See page 169 for details. Wraposts use MM #1702-2 or 1703-3 receptacles, See page 198 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

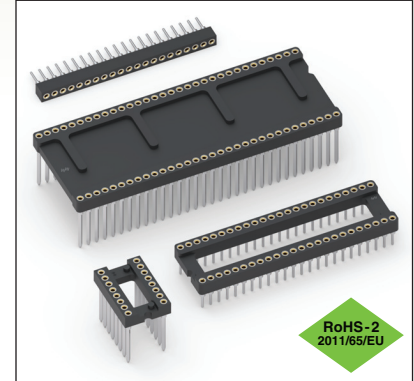

Total number of pins				Quantity per tube	ORDERING INFORMATION							
	A	B	C		Solder Tail		L = .370 (2 Level Wrapost)		L = .510 (3 Level Wrapost)			
					OPEN FRAME DIP SOCKET							
16	0.572	0.3	0.39	35	117-XX-316-41-005000		127-XX-316-41-002000		127-XX-316-41-003000			
28	0.992	0.4	0.49	20	117-XX-428-41-005000		127-XX-428-41-002000		127-XX-428-41-003000			
30	1.062	0.4	0.49	18	117-XX-430-41-005000		127-XX-430-41-002000		127-XX-430-41-003000			
48	1.692	0.4	0.49	12	117-XX-448-41-005000		127-XX-448-41-002000		127-XX-448-41-003000			
20	0.712	0.6	0.69	28	117-XX-620-41-005000		127-XX-620-41-002000		127-XX-620-41-003000			
28	0.992	0.6	0.69	20	117-XX-628-41-005000		127-XX-628-41-002000		127-XX-628-41-003000			
40	1.412	0.6	0.69	14	117-XX-640-41-005000		127-XX-640-41-002000		127-XX-640-41-003000			
42	1.482	0.6	0.69	13	117-XX-642-41-005000		127-XX-642-41-002000		127-XX-642-41-003000			
48	1.692	0.6	0.69	11	117-XX-648-41-005000		127-XX-648-41-002000		127-XX-648-41-003000			
52	1.832	0.6	0.69	11	117-XX-652-41-005000		127-XX-652-41-002000		127-XX-652-41-003000			
56	1.972	0.6	0.69	10	117-XX-656-41-005000		127-XX-656-41-002000		127-XX-656-41-003000			
64	2.252	0.6	0.69	8	117-XX-664-41-005000		127-XX-664-41-002000		127-XX-664-41-003000			
68	2.392	0.6	0.69	8	117-XX-668-41-005000		127-XX-668-41-002000		127-XX-668-41-003000			
64	2.252	0.75	0.84	8	117-XX-764-41-005000		127-XX-764-41-002000		127-XX-764-41-003000			
					CLOSED FRAME DIP SOCKET							
64	2.252	0.75	0.84	8	217-XX-764-41-005000		227-XX-764-41-002000		227-XX-764-41-003000			
				SINGLE ROW STRIP SOCKET								
				If desired, we will supply any length up to 21 pins.								
21	1.482	---	.104	-	317-XX-121-41-005000		327-XX-121-41-002000		327-XX-121-41-003000			
XX=Plating Code See to Right				SPECIFY PLATING CODE XX=			91	93		41 	43 	47 
				Sleeve (Pin) 		200 μ" Sn/Pb	200 μ" Sn/Pb		200 μ" Sn	200 μ" Sn	200 μ" Sn	
				Contact (Clip) 		10 μ" Au	30 μ" Au		10 μ" Au	30 μ" Au	Au Flash	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[317-93-121-41-005000](#) [217-93-764-41-005000](#) [117-43-764-41-005000](#) [117-43-668-41-005000](#) [117-43-664-41-005000](#) [117-43-656-41-005000](#) [117-43-652-41-005000](#) [117-43-648-41-005000](#) [117-43-642-41-005000](#) [117-43-640-41-005000](#) [117-43-628-41-005000](#) [117-43-620-41-005000](#) [117-43-448-41-005000](#) [117-43-430-41-005000](#) [117-43-428-41-005000](#) [117-43-316-41-005000](#) [317-93-103-41-005000](#) [117-93-764-41-005000](#) [117-93-628-41-005000](#) [117-93-620-41-005000](#) [117-93-652-41-005000](#) [117-93-640-41-005000](#) [117-93-648-41-005000](#) [117-93-668-41-005000](#) [117-93-642-41-005000](#) [117-93-664-41-005000](#) [117-93-656-41-005000](#) [317-93-108-41-005000](#) [117-93-428-41-005000](#) [117-93-448-41-005000](#) [117-93-316-41-005000](#) [117-93-430-41-005000](#) [127-93-764-41-003000](#) [127-93-764-41-002000](#) [127-93-668-41-003000](#) [127-93-668-41-002000](#) [127-93-664-41-003000](#) [127-93-664-41-002000](#) [127-93-656-41-003000](#) [127-93-656-41-002000](#) [127-93-652-41-003000](#) [127-93-652-41-002000](#) [127-93-648-41-003000](#) [127-93-648-41-002000](#) [127-93-642-41-003000](#) [127-93-642-41-002000](#) [127-93-640-41-003000](#) [127-93-640-41-002000](#) [127-93-628-41-003000](#) [127-93-628-41-002000](#) [127-93-620-41-003000](#) [127-93-620-41-002000](#) [127-93-448-41-003000](#) [127-93-448-41-002000](#) [127-93-430-41-003000](#) [127-93-430-41-002000](#) [127-93-428-41-003000](#) [127-93-428-41-002000](#) [127-93-316-41-003000](#) [127-93-316-41-002000](#) [317-43-121-41-005000](#) [217-43-764-41-005000](#) [127-43-764-41-003000](#) [127-43-764-41-002000](#) [127-43-668-41-003000](#) [127-43-668-41-002000](#) [127-43-664-41-003000](#) [127-43-664-41-002000](#) [127-43-656-41-003000](#) [127-43-656-41-002000](#) [127-43-652-41-003000](#) [127-43-652-41-002000](#) [127-43-648-41-003000](#) [127-43-648-41-002000](#) [127-43-642-41-003000](#) [127-43-642-41-002000](#) [127-43-640-41-003000](#) [127-43-640-41-002000](#) [127-43-628-41-003000](#) [127-43-628-41-002000](#) [127-43-620-41-003000](#) [127-43-620-41-002000](#) [127-43-448-41-003000](#) [127-43-448-41-002000](#) [127-43-430-41-003000](#) [127-43-430-41-002000](#) [127-43-428-41-003000](#) [127-43-428-41-002000](#) [127-43-316-41-003000](#) [127-43-316-41-002000](#) [317-43-116-41-005000](#) [117-41-652-41-105000](#) [117-93-668-61-005000](#) [117-41-620-41-105000](#) [117-93-430-61-005000](#) [117-43-316-61-105000](#) [117-43-668-61-005000](#) [117-91-640-41-005000](#) [117-43-628-61-105000](#) [117-91-448-41-005000](#)