





flex-circuit low profile solids - for circuits up to 1.25" (31,8mm)

ULTRA-THIN WITH OPTIONAL ADHESIVE FOAM BASE. Solid thin profile ferrite suppressors. Excellent for flex-circuits and tight spaces. Various sizes can accommodate circuits up to 1.25" (31,8mm).



PART No.	w/Adhesive	A	B	C	D	E	IMPEDANCE IN OHMS
FX28R0984-0	FX28R0984-0A	.984 25,0	.709 18,0	.945 24,0	.303 7,7	.035 0,9	220 @ 100MHz
FX28R0984-2	FX28R0984-2A	.984 25,0	.709 18,0	.630 16,0	.303 7,7	.035 0,9	170 @ 100MHz
FX28R1261-2	FX28R1261-2A	1.260 32,0	.988 25,1	.382 9,7	.303 7,7	.035 0,9	135 @ 100MHz
FX28R1450-1	FX28R1450-1A	1.450 36,8	1.165 29,6	.394 10,0	.303 7,7	.035 0,9	130 @ 100MHz
FX28R1457-4	FX28R1457-4A	1.457 37,0	1.299 33,0	.530 13,5	.177 4,5	.020 0,5	140 @ 100MHz

performance by part number:

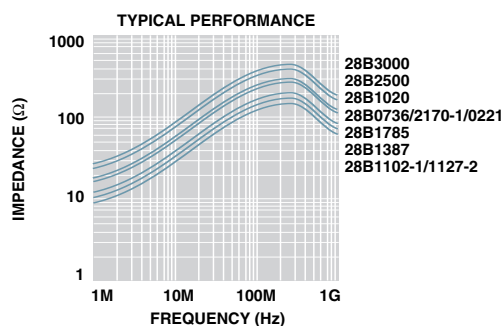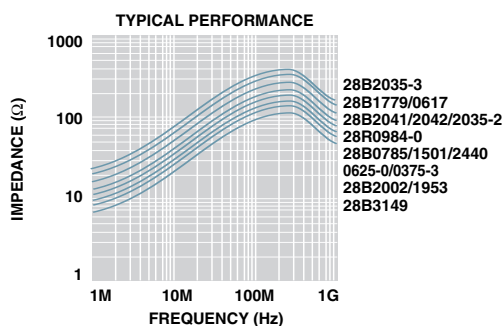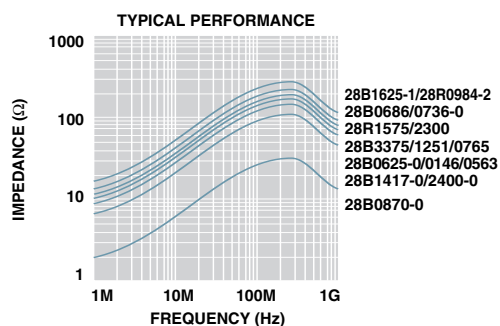

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LeaderTech:](#)

[FX28R0984-0](#) [FX28R0984-0A](#) [FX28R0984-2](#) [FX28R0984-2A](#) [FX28R1261-2](#) [FX28R1261-2A](#) [FX28R1450-1](#)
[FX28R1450-1A](#) [FX28R1457-4](#) [FX28R1457-4A](#)