

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPOT, ILLINOIS 

FED. MFR. CODE 91929

ASSEMBLY— PUSHBUTTON SWITCH

 Δ

ISSUE 1
SKETCH 1

REPLACES

19B13

PAGE 1 OF 1

no. SR 7233

JAN-58

CK ACE

Jan. 58

52

92.58

CH 16

58 CHECK

13, JAN

2.

DRAWING
NUMBER


—

158UE

REVISIONS

A	CO 12973
6	R. J. G. AUG. 58
B	CO 13504
25	AFP SEP 58
C	CO 171033
2	M B F JAN 63
D	CO 31782
16	D B W MAR 73
E	CO- 93593
22	P P F OCT 98
F	CO- 94273
15	G J W APR 99

FORMTEK

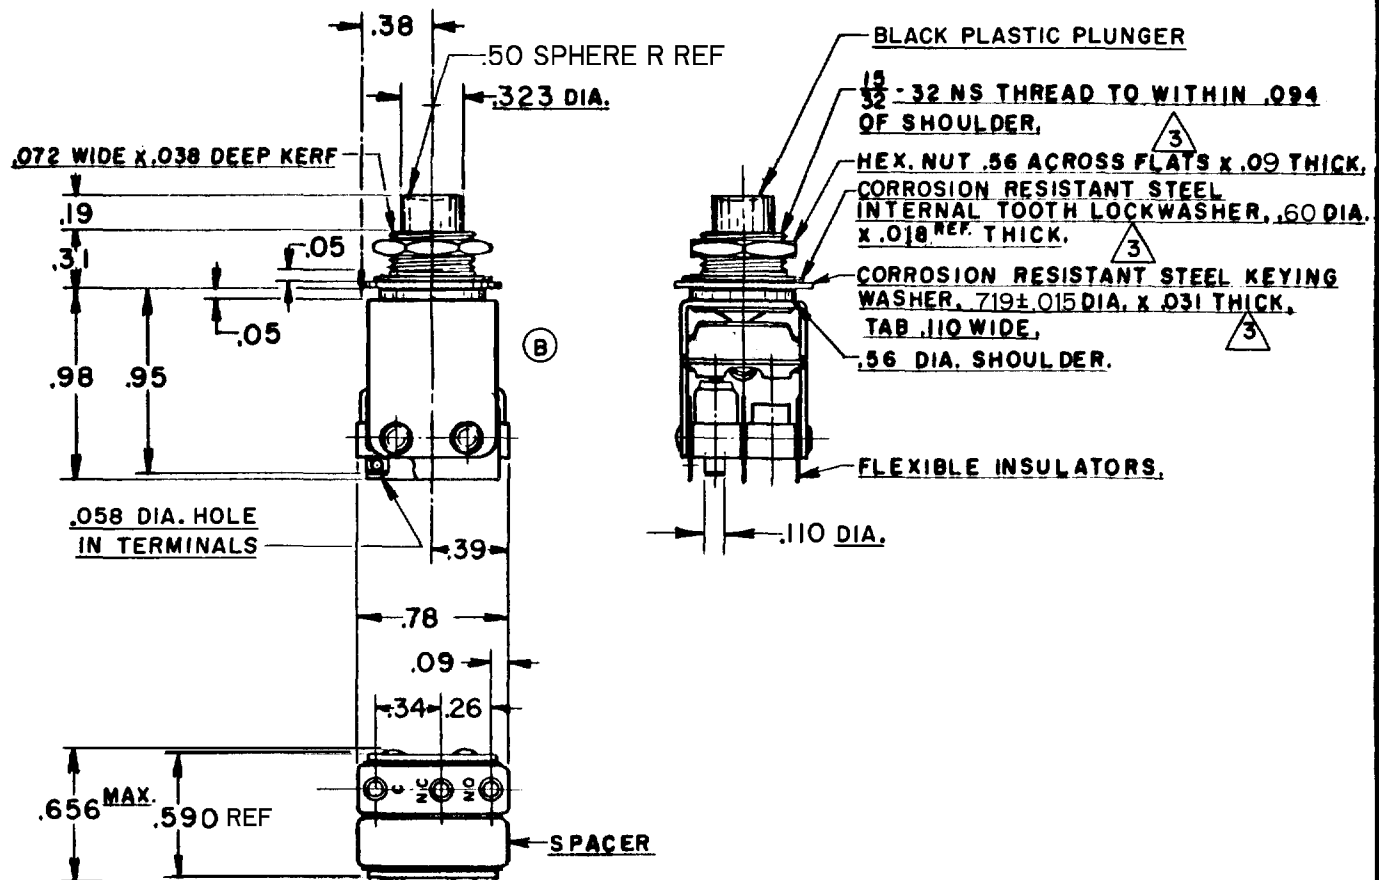

NOTE -

- (A) 1-UNIT INCLUDES "IISM TYPE" BASIC SWITCH (1) (C)
2-TERMINALS ARE PLATED FOR SOLDERING.
3-MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL
OPERATING FORCE-----30 OZ APPROX TOTAL TRAVEL-----100 OZ APPROX	CONTACT ARRANGEMENT S.P.D.T.	BREAK DISTANCE .010 MIN.	DO NOT SCALE PRINT
(B)	250 VAC----- 5 AMP 30 VOLTS DC RATING <u>INDUCTIVE</u> -----SEA LEVEL----- 3 AMP 50,000 FT.----- 2.5 AMP <u>RESISTIVE</u> -----SEA LEVEL----- 8 AMP 50,000 FT.----- 8 AMP <u>MAXIMUM INRUSH</u> ----- 24 AMP		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.03 TWO PLACE (.00) ±.01 THREE PLACE (.000) ±.001 ANGLES ±
			WEIGHT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[1PB13](#)