

LP and LT Xenon Beacons


553 9430
9441
9453
9465

technical specification - LP series:

MODEL	VOLTAGE	VOLTAGE RANGE	POWER OUTPUT	CURRENT CONSUMPTION (mA)					FLASH RATE
				@6V	@12V	@24V	@30V	@100V	
LP1X12/0.5	12	10 - 15 Vdc	0.5W	-	50	-	-	-	60/MIN
LP1XMV/0.5	MULTI	10 - 100 Vdc 20 - 72 Vac	0.5W	-	60	37	30	20	60/MIN
LP1X06/1	6	4.7 - 7.5 Vdc	1W	240	-	-	-	-	60/MIN
LP1X12/1	12	10 - 15 Vdc	1W	-	115	-	-	-	60/MIN
LP1X24/1	24	20 - 30 Vdc	1W	-	-	55	-	-	60/MIN
1205301 LP1XMV/1	MULTI	10 - 100 Vdc 20 - 72 Vac	1W	-	112	63	50	29	60/MIN
LP1X12/2	12	10-15 Vdc	2W	-	220	-	-	-	60/MIN
LP1X24/2	24	20 - 30 Vdc	2W	-	-	110	-	-	60/MIN
LP1X24/2ac	24ac	20 - 30 Vac	2W	-	-	100	-	-	60/MIN
LP1X50/2	50	40 - 55 Vdc	2W	-	-	-	55	-	60/MIN
LP1X110/2ac	110ac	90 - 125 Vac	2W	-	-	-	-	-	60/MIN
LP1X230/2ac	230ac	207 - 253 Vac	2W	-	-	-	-	-	60/MIN
1206201 LP4XMV/2	MULTI	10 - 100 Vdc 20 - 72 Vac	2W	-	130	95	83	37	75/MIN
1206301 LP3X12/5 Sync	12	10 - 15 Vdc	5W	-	360	-	-	-	90/MIN
LP3X24/5 Sync	24	20 - 30 Vdc	5W	-	-	160	-	-	90/MIN
LP4XMV/5	MULTI	10 - 100 Vdc 20 - 72 Vac	5W	-	250	200	112	60	75/MIN

Operating temperature -20°C - +55°C. Weight 0.1Kg (nominal).

OTHER FLASH RATES AVAILABLE TO SPECIAL ORDER

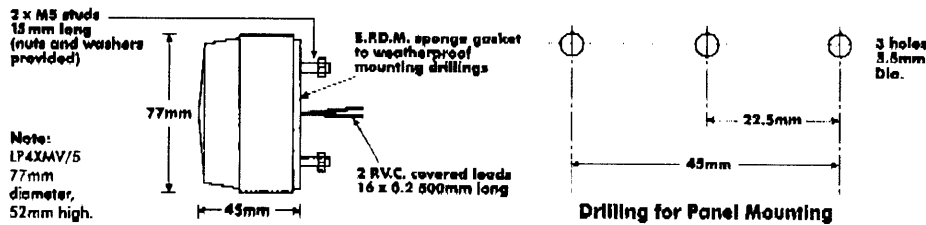

CE


High voltage transient and polarity reversal protection fitted.
CE - Complies with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC, where appropriate.

technical specification - LT series:

MODEL	VOLTAGE	VOLTAGE RANGE	POWER OUTPUT	CURRENT CONSUMPTION (mA)					FLASH RATE
				@6V	@12V	@24V	@30V	@100V	
LT4XMV/2	MULTI	10 - 100 Vdc 20 - 72 Vac	2W	-	130	95	83	37	75/MIN
LT2X06/5	6	4 - 7 Vdc	5W	1000	-	-	-	-	120/MIN
LT3X12/5	12	10 - 15 Vdc	5W	-	360	-	-	-	90/MIN
LT3X24/5	24	20 - 30 Vdc	5W	-	-	160	-	-	90/MIN
LT2X50/5	50	40 - 60 Vdc	5W	-	-	-	100	-	120/MIN
LT3X110/5ac	110ac	90 - 125 Vac	5W	-	-	-	-	-	90/MIN
LT3X230/5ac	230ac	207 - 253 Vac	5W	-	-	-	-	-	90/MIN
LT4XMV/5	MULTI	10 - 100 Vdc 20 - 72 Vac	5W	-	255	190	112	70	75/MIN

Operating temperature -20°C - +55°C. Weight 0.2Kg (nominal).

OTHER FLASH RATES AVAILABLE TO SPECIAL ORDER

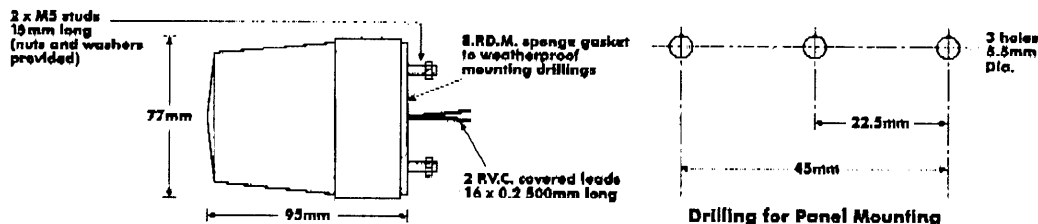

CE

High voltage transient and polarity reversal protection fitted.
CE - Complies with EMC Directive 89/336/EEC and Low Voltage Directive 73/23/EEC, where appropriate.

delta design
a division of NICOTECH Limited

Primrose Hill, Kings Langley, Herts WD4 8ST, England.

Tel: (U.K.) 01923 269522
(Int.) +44 1923 269522

Fax: (U.K.) 01923 260167
(Int.) +44 1923 260167

E-mail: sales@deltadesign.co.uk
Web: http://www.deltadesign.co.uk



BS EN ISO 9001
Certificate No. 2272


Your Delta Design distributor:

All specifications are nominal and subject to change without notice.

3539490

Accessories for Xenon Beacons

Reference	Description	LP	LT	RB	EL	SQ	SC
FX1	Mounting Box, available in grey or white	•					
FX2	Mounting Base	•	•				
FX40	Mounting Bracket 52103402	•	•				
FX24	Surface Mount / Side Entry Kit						
FX9	Protector Guard			•			
FX10	Protector Guard			•			
FX23	Protector Guard			•			
FX7	Single Bolt Kit			•			
FX12	Single Bolt Kit			•			
FX14	Mounting Bracket			•			
FX28	Cable Entry Plug			•			
FX32	DC Sounder			•			
FX33	AC Sounder			•			
FX34	AC Sounder			•			

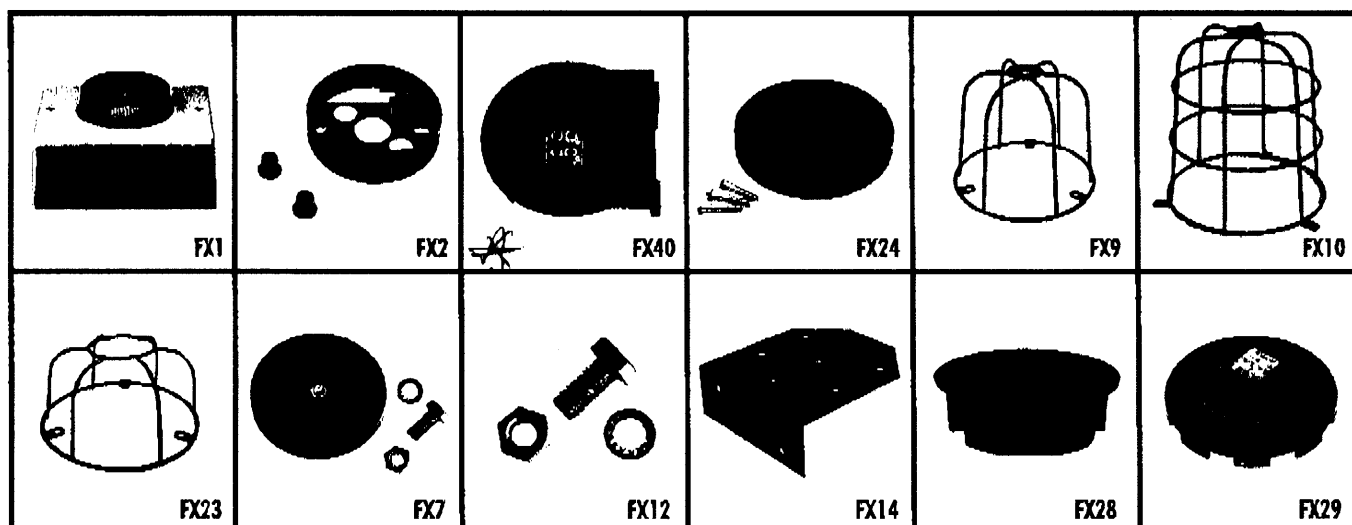

delta design

a division of NICOTECH Limited

Primrose Hill, Kings Langley, Herts WD4 8ST, England.

Tel: (U.K.) 01923 269522 (Int.) +44 1923 269522

Fax: (U.K.) 01923 260167 (Int.) +44 1923 260167

Email: sales@deltadesign.co.uk Web: http://www.deltadesign.co.uk



BS EN ISO 9001
Certificate No. 2272