

C-316768

METRIC

METRIC





PRINT DIST

PRINT DIST

AMP-J
REV 10/98
F102B600


NOTES,

1. PRODUCT SPEC., 108-5410
2. APPLICABLE CONTACT P/N
REC CONTACT: 177915-□ (φ20-φ16AWG)
177914-□ (φ26-φ22AWG)
3. MATING CONN. P/N
CAP HSG: 316769-□
TAB CONTACT: 177917-□ (φ20-φ16AWG)
177916-□ (φ26-φ22AWG)
4. APPLICABLE PLATE P/N: 316770-1
5. INSTRUCTION SHEET : 411-5638
- △ SEE TABLE 1
7. PART 5-316768-1 COMPLY WITH GLOW WIRE REQUIREMENT FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30(GWT).

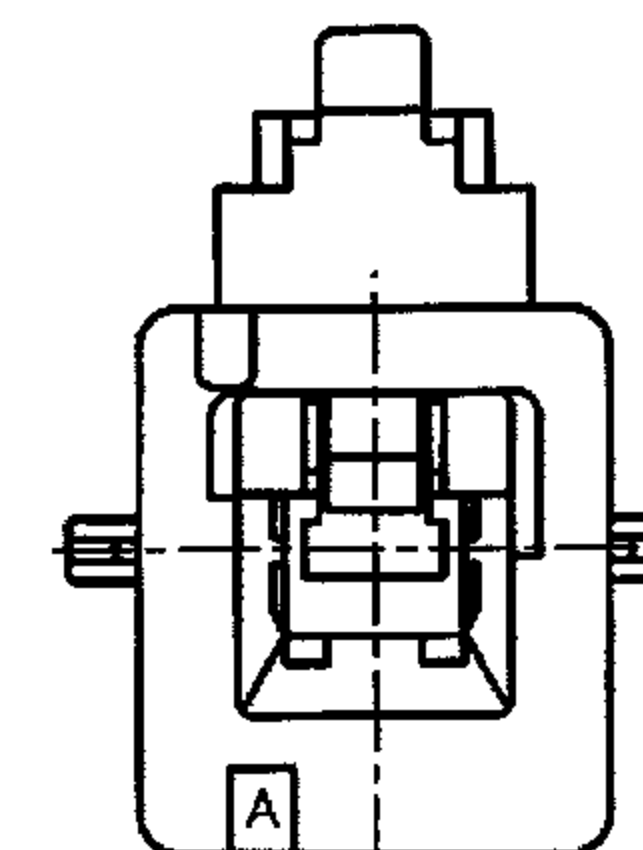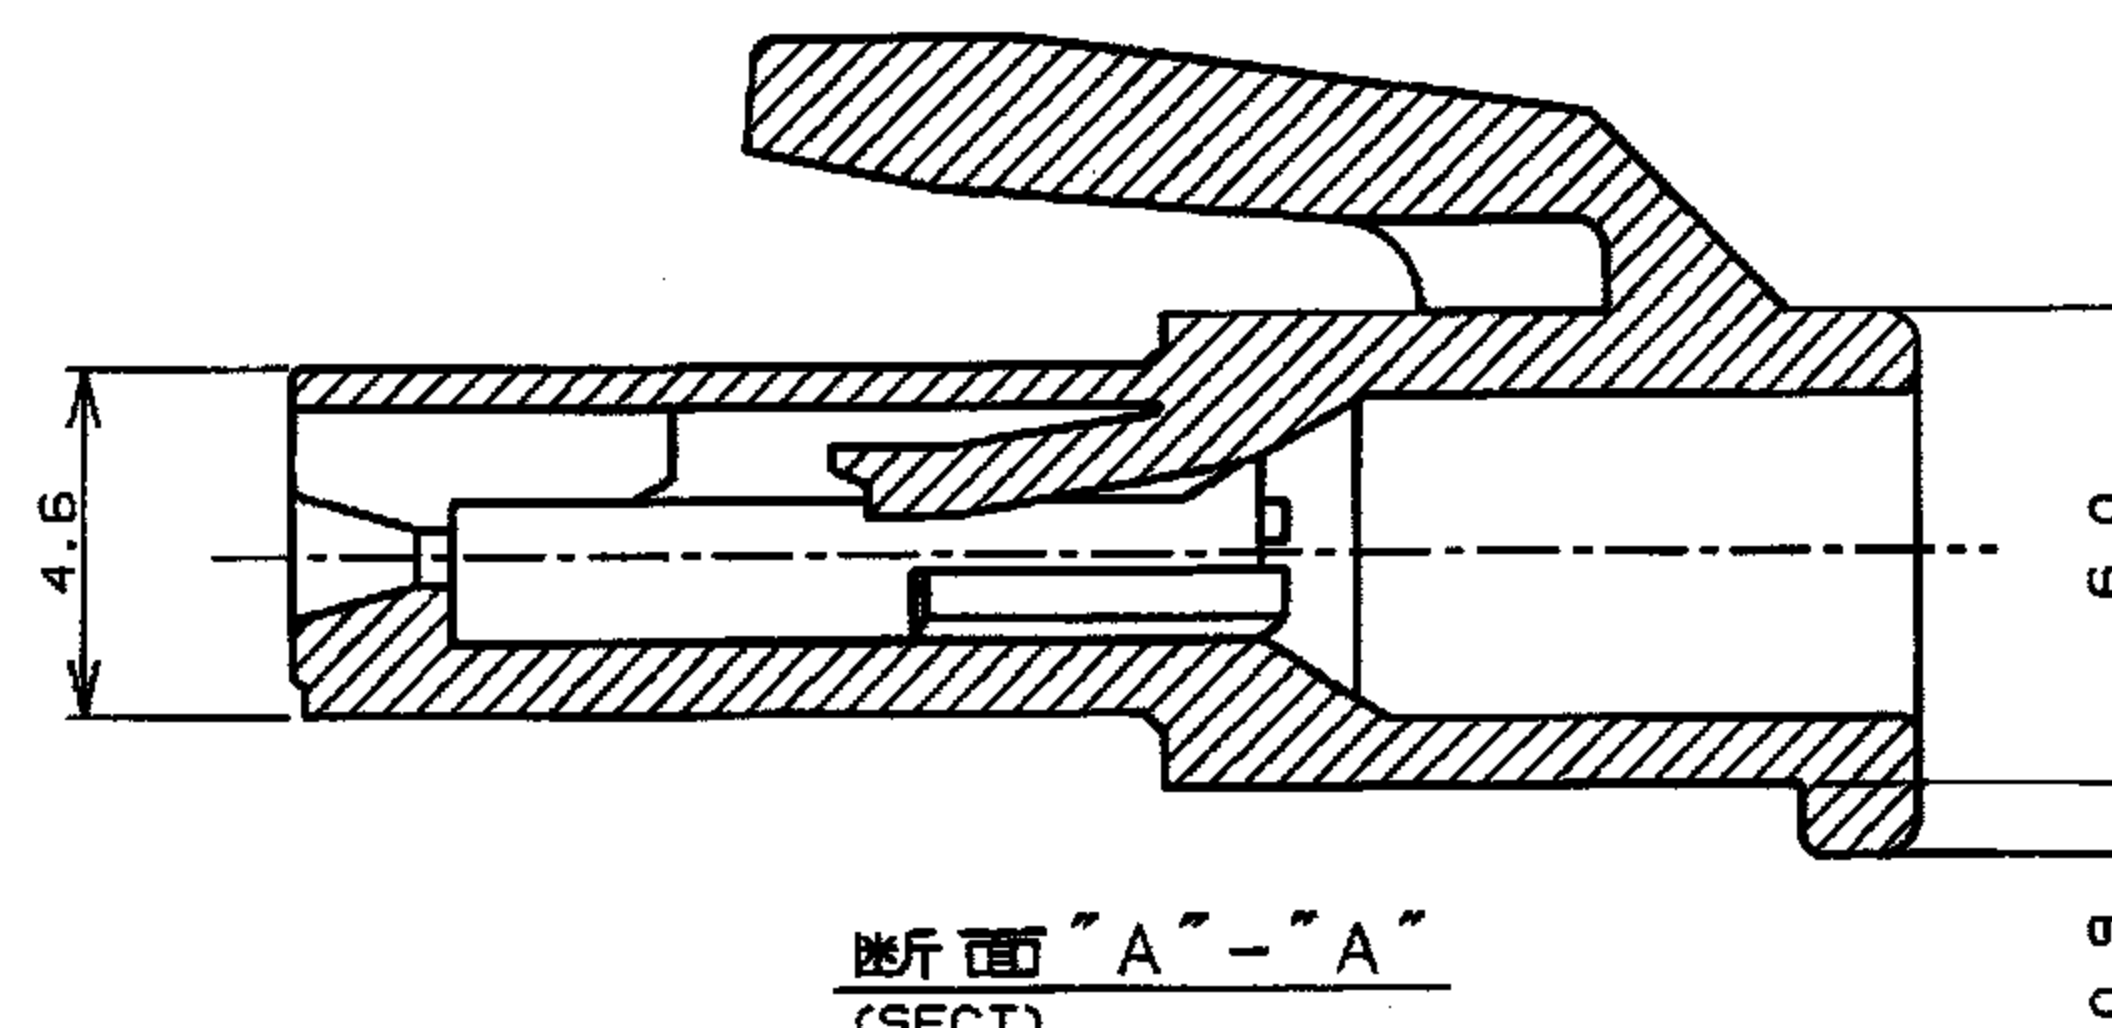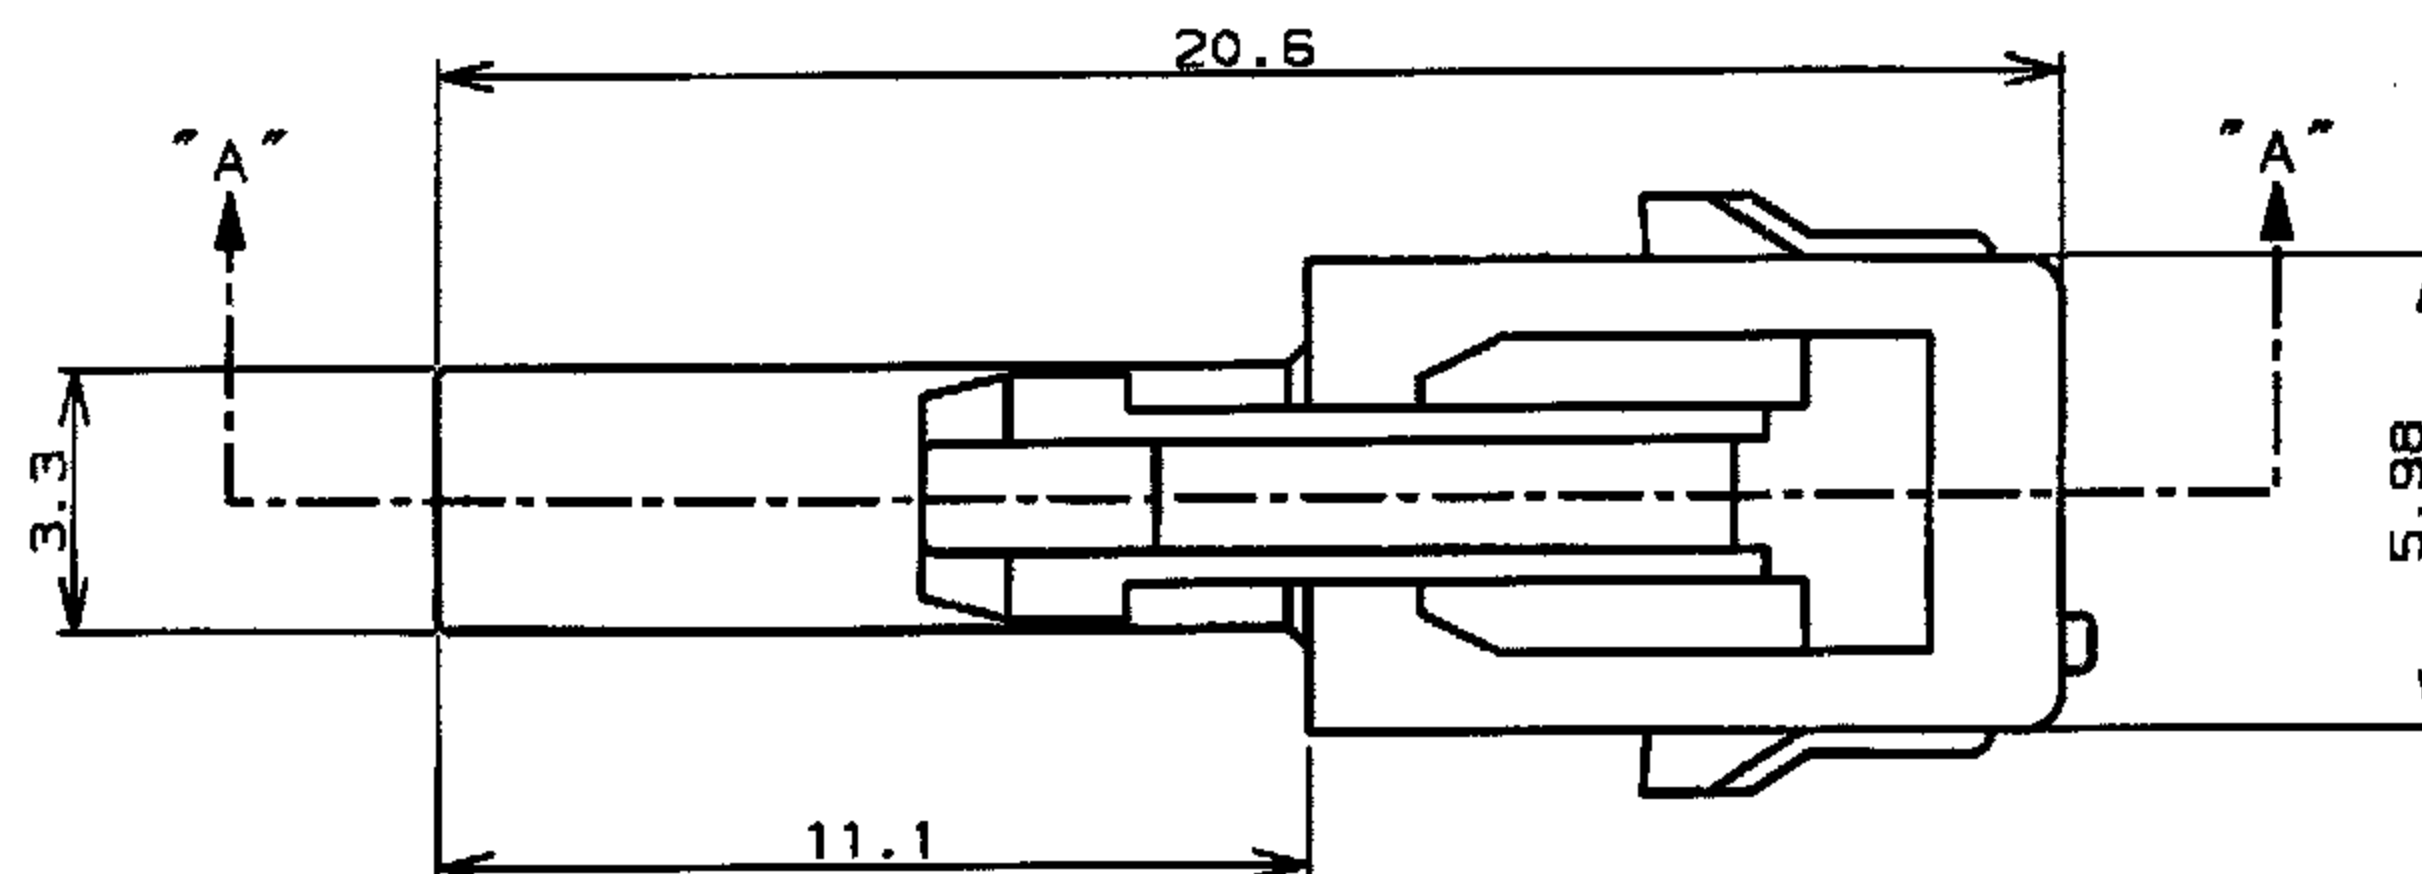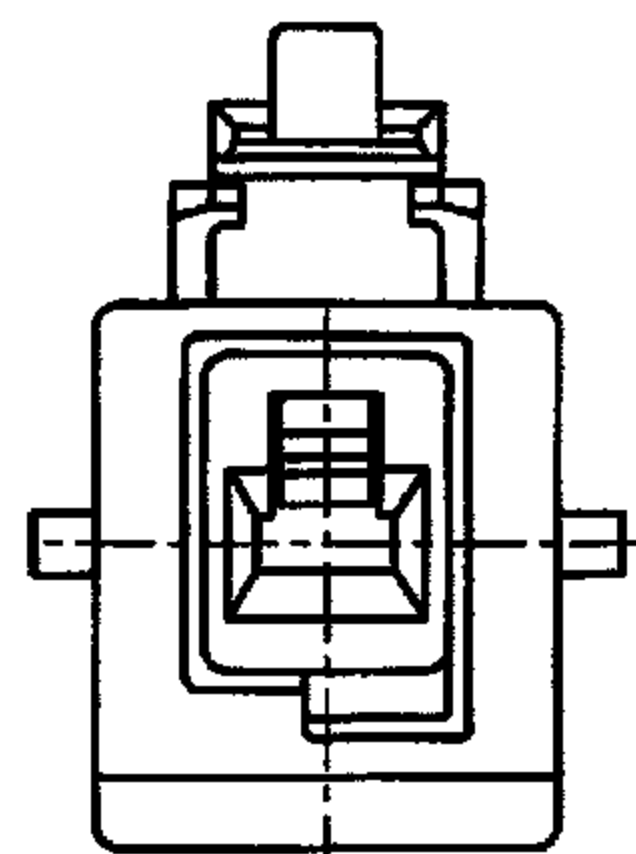

注:

1. 適用製品規格: 108-5410
2. 適用コンタクト型番
リセ・コンタクト: 177915-□ (φ20-φ16AWG)
177914-□ (φ26-φ22AWG)
3. 嵌合相手側製品型番
キャップ・ハウジング: 316769-□
タブ・コンタクト: 177917-□ (φ20-φ16AWG)
177916-□ (φ26-φ22AWG)
4. 適用プレート型番: 316770-1
5. 取扱説明書: 411-5638
- △ 表1参照

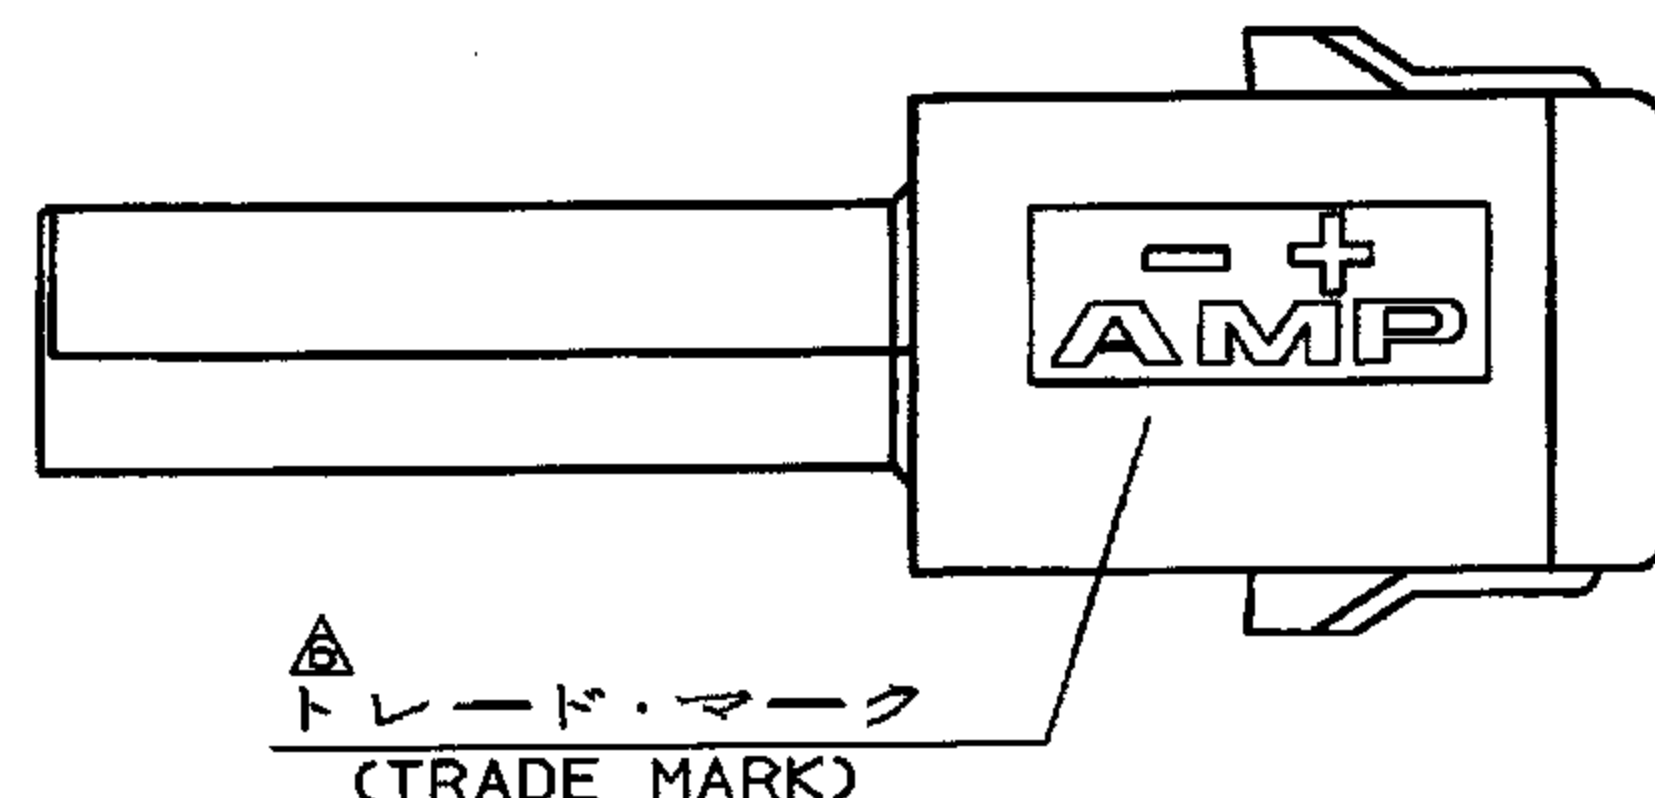

自然色(NATURAL)	1	5-316768-1
黒 (BLACK)	↑	↑ -9
青 (BLUE)	↑	↑ -6
黄 (YELLOW)	↑	↑ -4
赤 (RED)	↓	↓ -2
自然色(NATURAL)	1	316768-1
ハウジング色調 (HOUSING COLOR)	極数 (Pos.)	型番 (P/N)



表1 (TABLE 1)

トレードマーク (TRADE MARK)	生産場所 (MANUFACTURING PLACE)
—AMP OR AMP	日本 (JAPAN)
—+AMP OR AMP	中国 (CHINA(PRC))
•AMP OR AMP	韓国 (KOREA)

												AMP				Tyco Electronics AMP K.K. Kawasaki, Japan					
				組合電線断面積 (WIRE RANGE)				電線外径 (INSULATION DIA.)				名称 (NAME)									
				mm ² (AWG -)				mmφ				AMP POWER DOUBLE LOCK CONN. 3.96mmピッチ プラグハウジング 1極									
				材料 (MATERIAL)				仕上 (FINISH)				AMP POWER DOUBLE LOCK CONN. 3.96mm PITCH PLUG HOUSING 1 Pos									
				6/6 ナイロン (UL94V-0) 6/6 NYLON (UL94V-0)				— / —				一般公差				SIZE		LOC		番号 (No.)	
				DR. 22.MAR '96 N. YAMASAKI				DE. 22.MAR '96 N. YAMASAKI				10以下 : ±0.2 10を超え 30以下 : ±0.25 30を超え 100以下 : ±0.3 角 度 : ±3°				A3		J		C-316768	
				CHK. 22.MAR '96 M. SHINDO				APP. 22.MAR '96 Y. KASHIWA				尺度 (SCALE)				REV.		SHEET			
				LTR 変更 (REVISION RECORD)				DR CHK DATE				— / —				B1		1 OF 1			