

Surface Mount Type

SP-Cap

Series: **SX** (Low ESR Products)




■ Features

- Large capacitance (560 μ F max.)
- Low ESR (4.5 m Ω to 9 m Ω)
- RoHS directive compliant

■ Specifications


Series & Size Code	SX			
Category Temp. Range	−40 °C to +105 °C			
Rated W.V.Range	2 V.DC to 6.3 V.DC			
Nominal Cap.Range	82 μF to 560 μF			
Capacitance Tolerance	±20 %			
DC Leakage Current	I ≤ 0.1 CV (μA) 2 minutes			
tan δ	≤ 0.06 (120 Hz/+20 °C)			
Surge Voltage	Rated Working Voltage × 1.25 (15 °C to 35 °C)			
Endurance	After applying rated working voltage for 2000 hours at 105 °C±2 °C, and then being stabilized at +20 °C, capacitor shall meet the following limits.			
	Capacitance change	±20% of initial measured value		
	tan δ	≤ 200 % of initial specified value		
	DC leakage current	≤ 300 % of initial specified value		
Moisture resistance	After storing for 500 hours at 60 °C, 90 %			
	Capacitance change of initial measurd value	2, 2.5 V.DC	4 V.DC	6.3 V.DC
		+70, −20 %	+60, −20 %	+50, −20 %
	tan δ	≤ 200 % of initial specified value		
	DC leakage current	≤ Initial specified value		

■ Marking

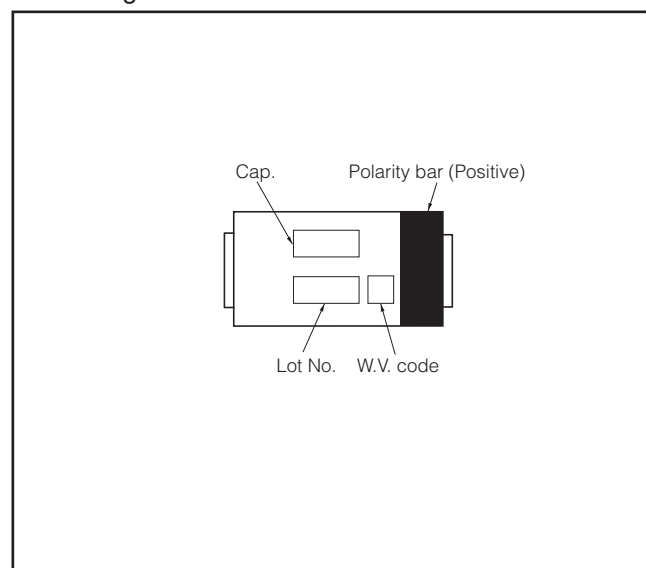

■ Dimensions in mm(not to scale)

(Unit : mm)

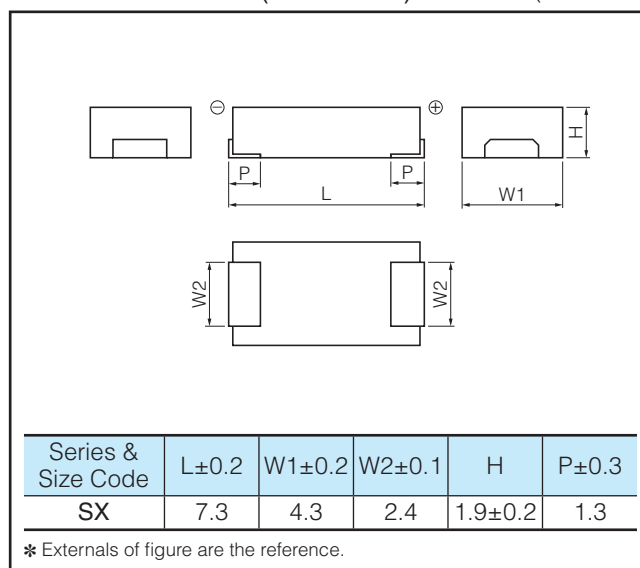

■ Low ESR Products

Series & Size Code	Rated W.V. (V.DC)	Capacitance (±20 %) (μF)	Case Size			Specification		Part number	*4 Min. Packaging Q'ty (pcs)
			L (mm)	W (mm)	H (mm)	*1 Ripple current (Ar.m.s.)	*2 ESR (mΩ max.)		
SX	2	180	7.3	4.3	1.9	6.3	9	EEFSX0D181ER	3500
		220	7.3	4.3	1.9	6.3	9	EEFSX0D221ER	3500
		270	7.3	4.3	1.9	6.3	9	EEFSX0D271ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0D271XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0D271E4	3500
		330	7.3	4.3	1.9	6.3	9	EEFSX0D331ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0D331XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0D331E4	3500
		390	7.3	4.3	1.9	6.3	9	EEFSX0D391ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0D391XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0D391E4	3500
		470	7.3	4.3	1.9	6.3	9	EEFSX0D471ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0D471XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0D471E4	3500
		560	7.3	4.3	1.9	8.5	4.5	EEFSX0D561E4	3500
	2.5	150	7.3	4.3	1.9	6.3	9	EEFSX0E151ER	3500
		180	7.3	4.3	1.9	6.3	9	EEFSX0E181ER	3500
		220	7.3	4.3	1.9	6.3	9	EEFSX0E221ER	3500
			7.3	4.3	1.9	7.0	7	EEFSX0E221E7	3500
		270	7.3	4.3	1.9	7.0	7	EEFSX0E271E7	3500
		330	7.3	4.3	1.9	6.3	9	EEFSX0E331ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0E331XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0E331E4	3500
		390	7.3	4.3	1.9	6.3	9	EEFSX0E391ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0E391XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0E391E4	3500
		470	7.3	4.3	1.9	6.3	9	EEFSX0E471ER	3500
			7.3	4.3	1.9	7.5	6	EEFSX0E471XE	3500
			7.3	4.3	1.9	8.5	4.5	EEFSX0E471E4	3500
	4	82	7.3	4.3	1.9	6.3	9	EEFSX0G820ER	3500
		100	7.3	4.3	1.9	6.3	9	EEFSX0G101ER	3500
		150	7.3	4.3	1.9	6.3	9	EEFSX0G151ER	3500
			7.3	4.3	1.9	7.0	7	EEFSX0G151E7	3500
		180	7.3	4.3	1.9	6.3	9	EEFSX0G181ER	3500
		220	7.3	4.3	1.9	6.3	9	EEFSX0G221ER	3500
	6.3	120	7.3	4.3	1.9	7.0	7	EEFSX0J121E7	3500
		150	7.3	4.3	1.9	6.3	9	EEFSX0J151ER	3500

*1: Ripple current (100 kHz/ +45 °C), *2: ESR (100 kHz/+20 °C)

*3: Please refer to the page of "Mounting Specifications".

*4: Please contact us when 500 pcs packing is necessary.

Temperature Compensation Multipliers for Ripple Current		
≤ 45 °C	45 °C < T ≤ 85 °C	85 °C < T ≤ 105 °C
1.0	0.7	0.25

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[EEF-SX0D271R](#) [EEF-SX0D331R](#) [EEF-SX0E181R](#) [EEF-SX0D331XR](#) [EEF-SX0D391ER](#) [EEF-SX0D391R](#) [EEF-SX0D471ER](#) [EEF-SX0D471R](#) [EEF-SX0D471XE](#) [EEF-SX0D471XR](#) [EEF-SX0E221ER](#) [EEF-SX0E221R](#) [EEF-SX0E331ER](#) [EEF-SX0E331R](#) [EEF-SX0E331XE](#) [EEF-SX0E331XR](#) [EEF-SX0E391ER](#) [EEF-SX0E391R](#) [EEF-SX0E391XE](#) [EEF-SX0E391XR](#) [EEF-SX0G151ER](#) [EEF-SX0G151R](#) [EEF-SX0D181R](#) [EEF-SX0G221ER](#) [EEF-SX0D471E4](#) [EEF-SL0D100R](#) [EEF-SX0E471E4](#) [EEF-SX0E471ER](#) [EEF-SX0E471XE](#) [EEF-SX0E151R](#) [EEF-SX0G101R](#) [EEF-SX0J680R](#) [EEF-SX0D271ER](#) [EEF-SX0D181ER](#) [EEF-SX0D221ER](#) [EEF-SX0D221R](#) [EEF-SX0D331ER](#) [EEF-SX0E151ER](#) [EEF-SX0E181ER](#) [EEF-SX0G101ER](#) [EEF-SX0G820ER](#) [EEF-SX0G820R](#) [EEF-SX0D331XE](#) [EEF-SX0J151ER](#) [EEF-SX0D271E4](#) [EEF-SX0D271XE](#) [EEF-SX0D391E4](#) [EEF-SX0D391XE](#) [EEF-SX0D391XR](#) [EEF-SX0E221E7](#) [EEF-SX0G181ER](#) [EEF-SX0J121E7](#)