

### Application

- Use in NT and local central office
- Matched to the ICs, e.g.
  - ...P1116: Infineon PEB/PSB 8091, 8191; AMD AM 2091
  - ...P1127: Infineon PEB/PSB 8090; AMD AM 20902; MIETEC 2071

### Features

- Complies with CCITT G.961
- Remote power feeding to NT


### Marking

- Manufacturer, middle block of ordering code, date code



### Packing

- Polyfoam tray
- Packing unit: 280 pcs.

### Pinning

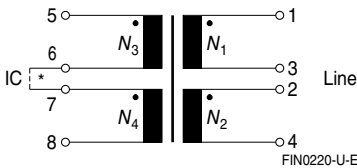


\* = external connection



FIN0184-K

Recommended  
hole arrangement  
(view in  
mounting  
direction)

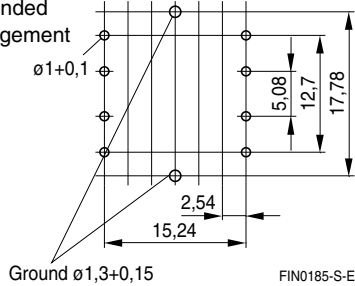

### Technical data (electrical specifications at 25 °C)

| Ordering code               |                  | B78386P1116A005   | B78386P1127A005     |
|-----------------------------|------------------|-------------------|---------------------|
| Type/Core                   |                  | RM 6              | RM 6                |
| $N_1 : N_2 : N_3 : N_4$     |                  | 1,6 : 1,6 : 1 : 1 | 1,32 : 1,32 : 1 : 1 |
| $L_H$                       | mH               | $13,3 \pm 10 \%$  | $7,7 \pm 10 \%$     |
| $L_S$ (typ.)                | $\mu$ H          | 45                | 40                  |
| $C_K$ (typ.)                | pF               | 70                | 45                  |
| $R_{DC}$ (Line) (typ.)      | $\Omega$         | 5,0               | 3,8                 |
| $R_{DC}$ (IC) (typ.)        | $\Omega$         | 5,0               | 3,8                 |
| $V_T$                       | kV <sub>AC</sub> | 2,5               | 2,5                 |
| $I_{DC}$ (typ.)             | mA               | 60                | 60                  |
| Transmission code           |                  | 2B1Q              | 4B3T                |
| Operating temperature range |                  | -25/+85           | -25/+85             |

**Herausgegeben von EPCOS AG****Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND****☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG****Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY****☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.