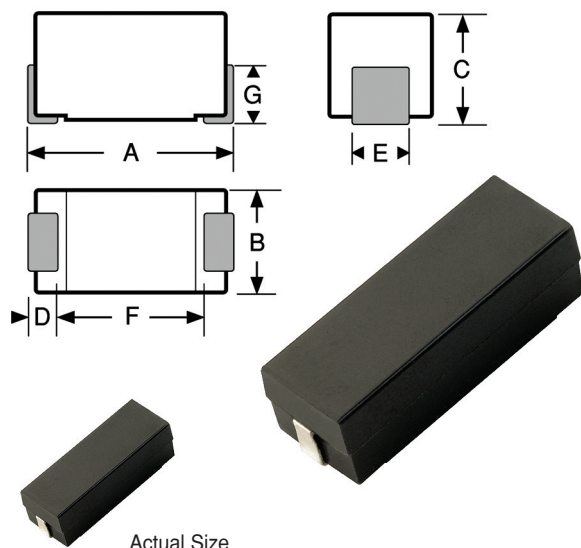


SERIES**8532R**
8532**High Current Surface Mount Power Inductors**

Actual Size

Mechanical Configuration

Units are encapsulated in a Surface Mount package, using an epoxy molded case. High resistivity ferrite core, allows for high inductance with low DC resistance.

Physical Parameters

	Inches	Millimeters
A	0.840 to 0.880	21.34 to 22.35
B	0.310 to 0.330	7.87 to 8.38
C	0.266 to 0.286	6.76 to 7.26
D	0.050 Min.	1.27 Min.
E	0.070 to 0.110	1.78 to 2.79
F	0.750 (Ref. only)	19.05 (Ref. only)
G	0.120 (Ref. only)	3.05 (Ref. only)

Dimensions "A" and "C" are over terminals.

Operating Temperature Range -55°C to +125°C

Current Rating 40°C Rise over 85°C Ambient

Maximum Power Dissipation at 85°C 0.50 Watts

Inductance

Measured at 1 VAC open circuit with no DC current.
Incremental Current The current at which the inductance will decrease by a maximum of 5% from its initial zero DC value.

Weight Max. (Grams) 2.5

Marking Delevan; dash number; date code (YYWWL).

Note: An R before the date code indicates a RoHS component.

Example: 8532R-52L

DELEVAN

52

R 0901B

Packaging Tape & reel (44mm):

13" reel, 480 pieces max.; 7" reel not available

Made In the U.S.A.

DASH NUMBER*
INDUCTANCE (μH)
±15% @ 1 kHz
DC RESISTANCE
MAXIMUM (OHMS)
CURRENT RATING
MAXIMUM (Amps)
INCREMENTAL
CURRENT (Amps)

SERIES 8532 FERRITE CORE

-01L	1.0	0.009	6.27	6.4
-02L	1.2	0.010	5.95	5.8
-03L	1.5	0.011	5.67	5.2
-04L	1.8	0.012	5.43	4.8
-05L	2.2	0.013	5.22	4.3
-06L	2.7	0.014	5.03	3.9
-07L	3.3	0.016	4.70	3.5
-08L	3.9	0.017	4.56	3.2
-09L	4.7	0.022	4.01	2.9
-10L	5.6	0.024	3.84	2.7
-11L	6.8	0.026	3.69	2.5
-12L	8.2	0.028	3.55	2.2
-13L	10.0	0.033	3.27	2.0
-14L	12.0	0.037	3.09	1.8
-15L	15.0	0.040	2.97	1.6
-16L	18.0	0.044	2.84	1.5
-17L	22.0	0.050	2.66	1.4
-18L	27.0	0.070	2.25	1.2
-19L	33.0	0.075	2.17	1.1
-20L	39.0	0.084	2.05	1.0
-21L	47.0	0.104	1.84	0.93
-22L	56.0	0.130	1.65	0.85
-23L	68.0	0.145	1.56	0.77
-24L	82.0	0.152	1.53	0.71
-25L	100.0	0.208	1.30	0.64
-26L	120.0	0.283	1.12	0.58
-27L	150.0	0.330	1.04	0.52
-28L	180.0	0.362	0.99	0.48
-29L	220.0	0.505	0.84	0.43
-30L	270.0	0.557	0.80	0.39
-31L	330.0	0.650	0.74	0.35
-32L	390.0	0.770	0.68	0.32
-33L	470.0	1.03	0.59	0.29
-34L	560.0	1.14	0.56	0.27
-35L	680.0	1.50	0.49	0.25
-36L	820.0	1.98	0.42	0.22
-37L	1000.0	2.30	0.39	0.20
-38L	1200.0	2.55	0.37	0.18
-39L	1500.0	3.00	0.34	0.16
-40L	1800.0	4.00	0.30	0.15
-41L	2200.0	4.40	0.28	0.14
-42L	2700.0	5.80	0.25	0.12
-43L	3300.0	6.56	0.23	0.11
-44L	3900.0	8.63	0.20	0.10
-45L	4700.0	10.1	0.19	0.09
-46L	5600.0	11.2	0.18	0.09
-47L	6800.0	15.0	0.15	0.08
-48L	8200.0	20.8	0.13	0.07
-49L	10000.0	23.4	0.12	0.06
-50L	12000.0	26.0	0.12	0.06
-51L	15000.0	36.0	0.10	0.05
-52L	18000.0	40.0	0.09	0.05

Optional Tolerances: Values < 10μH: K = 10% J = 5%
Values ≥ 10μH: K = 10% J = 5% H = 3%

*Complete part # must include series # PLUS the dash #

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

API Delevan:

[8532-01L](#) [8532-02L](#) [8532-03L](#) [8532-04L](#) [8532-05L](#) [8532-06L](#) [8532-07L](#) [8532-08L](#) [8532-09L](#) [8532-10L](#) [8532-11L](#)
[8532-12L](#) [8532-13L](#) [8532-14L](#) [8532-15L](#) [8532-16L](#) [8532-17L](#) [8532-18L](#) [8532-19L](#) [8532-20L](#) [8532-21L](#) [8532-22L](#)
[8532-23L](#) [8532-24L](#) [8532-25L](#) [8532-26L](#) [8532-27L](#) [8532-28L](#) [8532-29L](#) [8532-30L](#) [8532-32L](#) [8532-33L](#) [8532-34L](#)
[8532-35L](#) [8532-36L](#) [8532-37L](#) [8532-38L](#) [8532-39L](#) [8532-40L](#) [8532-41L](#) [8532-42L](#) [8532-43L](#) [8532-44L](#) [8532-45L](#)
[8532-46L](#) [8532-47L](#) [8532-48L](#) [8532-49L](#) [8532-50L](#) [8532-51L](#) [8532-52L](#) [8532-13J](#) [8532-22L-TR](#) [8532-25LTR](#)
[8532-31L](#) [8532-33LTR](#) [8532-35LTR](#) [8532-37LTR](#) [8532R-13J](#) [8532R-14LTR](#) [8532R-43L](#) [8532R-47L](#) [8532R-45L](#)
[8532R-41L](#) [8532R-49L](#) [8532R-46L](#) [8532R-42L](#) [8532R-40L](#) [8532R-48L](#) [8532R-44L](#) [8532R-03L](#) [8532R-07L](#) [8532R-](#)
[05L](#) [8532R-09L](#) [8532R-01L](#) [8532R-06L](#) [8532R-08L](#) [8532R-02L](#) [8532R-04L](#) [8532R-31L](#) [8532-01K](#) [8532-01J](#)
[8532-02K](#) [8532-02J](#) [8532-03K](#) [8532-03J](#) [8532-04K](#) [8532-04J](#) [8532-05K](#) [8532-05J](#) [8532-06K](#) [8532-06J](#) [8532-07K](#)
[8532-07J](#) [8532-08K](#) [8532-08J](#) [8532-09K](#) [8532-09J](#) [8532-10K](#) [8532-10J](#)