

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [50398-8000](#)
Status: **Active**
Description: 2.50mm Pitch Crimp Terminal, 50398, Reel

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-500592-001 \(PDF\)](#)
- [Product Specification PS-504693-001 \(PDF\)](#)
- [Product Specification PS-51111-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	50398
Application	Signal
Crimp Quality Equipment	Yes
Product Name	N/A
UPC	800753630284


Physical

Gender	Male
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	125.900/mg
Packaging Type	Reel
Plating min - Mating	0.889µm
Plating min - Termination	0.914µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.15-1.80mm
Wire Size AWG	22, 24, 26, 28
Wire Size mm²	N/A

Material Info

Reference - Drawing Numbers

Product Specification	PS-500592-001, PS-504693-001, PS-51111-001, RPS-500592-001, RPS-500592-002, RPS-500592-003, RPS-51111-004, RPS-51111-007, RPS-51112-003
Sales Drawing	SD-50398-001

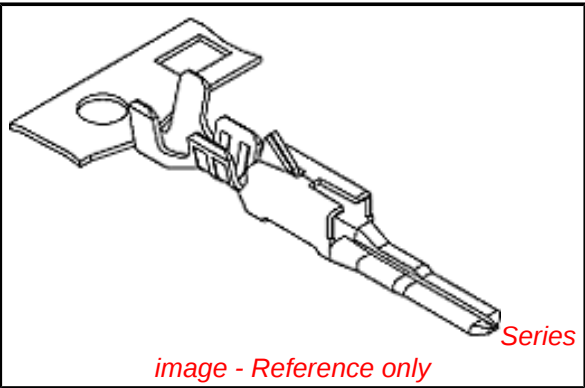

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

**Contains SVHC: No
Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[50398Series](#)

Mates With

[50397](#)

Use With

[51112](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
Hand Crimp Tool for 2.50mm Pitch Wire to Wire Crimp Terminals	0638238000
T2 Terminator Die	0638535000
FineAdjust™ Applicator	0638635000

Japan	
Description	Product #
Applicator for M211A Bench Press, 22-28 AWG Wire	<u>0573163000</u>
Side-Feed Applicator For Full-Auto Machine	<u>0573163200</u>
Hand Extraction Tool	<u>0573166000</u>
Extraction Tool	<u>0573166100</u>

This document was generated on 06/30/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION