

5

4

3

2

1

DRAWING NO.

CP892-CUST

REVISIONS

01

OFFICIAL RELEASE

02-20-09

J

W

B

Y

T

Thomas
s Chow

Description: Jack Assembly Straight Crimp Type 2 Piece BNC,RG59,62

Part No: CP892

Application: For RG59,RG62 Cable

Crimp Tool: 24-9859P

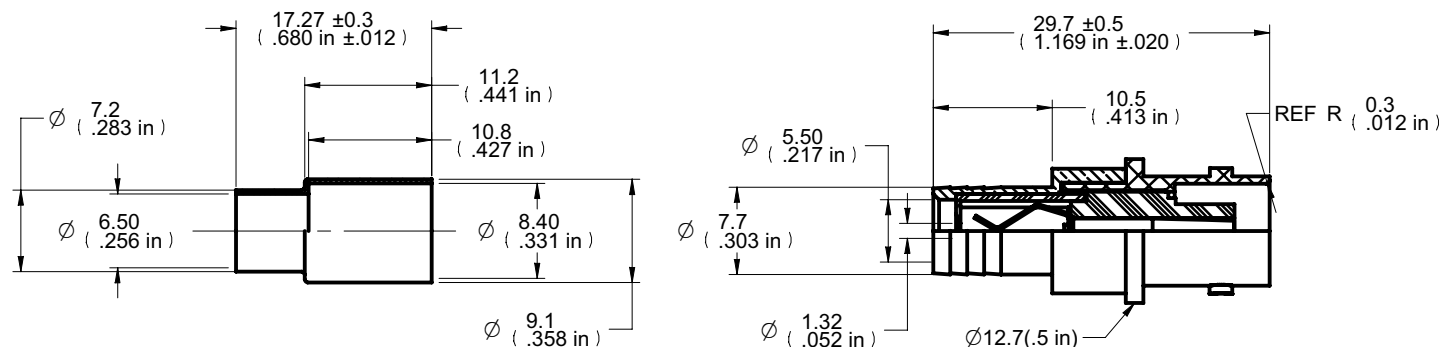
Impedance: 50 Ohms

Frequency Range: 0-2 GHz

Material: Body: Zinc Nickel plated
Contact: Phosphor bronze Gold plated
Insulator: TPX
Crimp Sleeve: Brass Nickel plated

RoHS Compliance: Yes

Technical Detail: Refer to Emerson Document P/N 27-0000

DIM OUTLINE

CUSTOMER COPY

受控 CONTROLLED DOCUMENT

编号 P/N	CP892-CUST	版本 Rev	01	日期 Rel'd Date	Apr29,09
-----------	------------	-----------	----	------------------	----------

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY IVON.W	DATE 02-20-09
DECIMALS	mm	CHECKED BY BETTY.YU	DATE 02-20-09
X	± 0.5	APPROVED BY THOMAS	DATE 02-20-09
X.X	± 0.3		
X.XX	± 0.1		
ANGLES	± 0.5°	U/M mm	⊕ ⊖

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.

		TITLE JACK ASSEMBLY STRAIGHT CRIMP TYPE 2 PIECE BNC,RG59,62	
SHEET 1 OF 1	DRAWING NO. CP892-CUST	SIZE A	