

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-2RW82271**APT8400****BZ-2RW82271**

PAGE 1 OF 1

MDRAWING
NUMBER

X

X

ISSUE
9

REPLACES

RELEASE NO. SR12229

CHECK

08DEC05

RJ

CHECK

23 MAR 66

23 MAR 66

LSD

CHECK

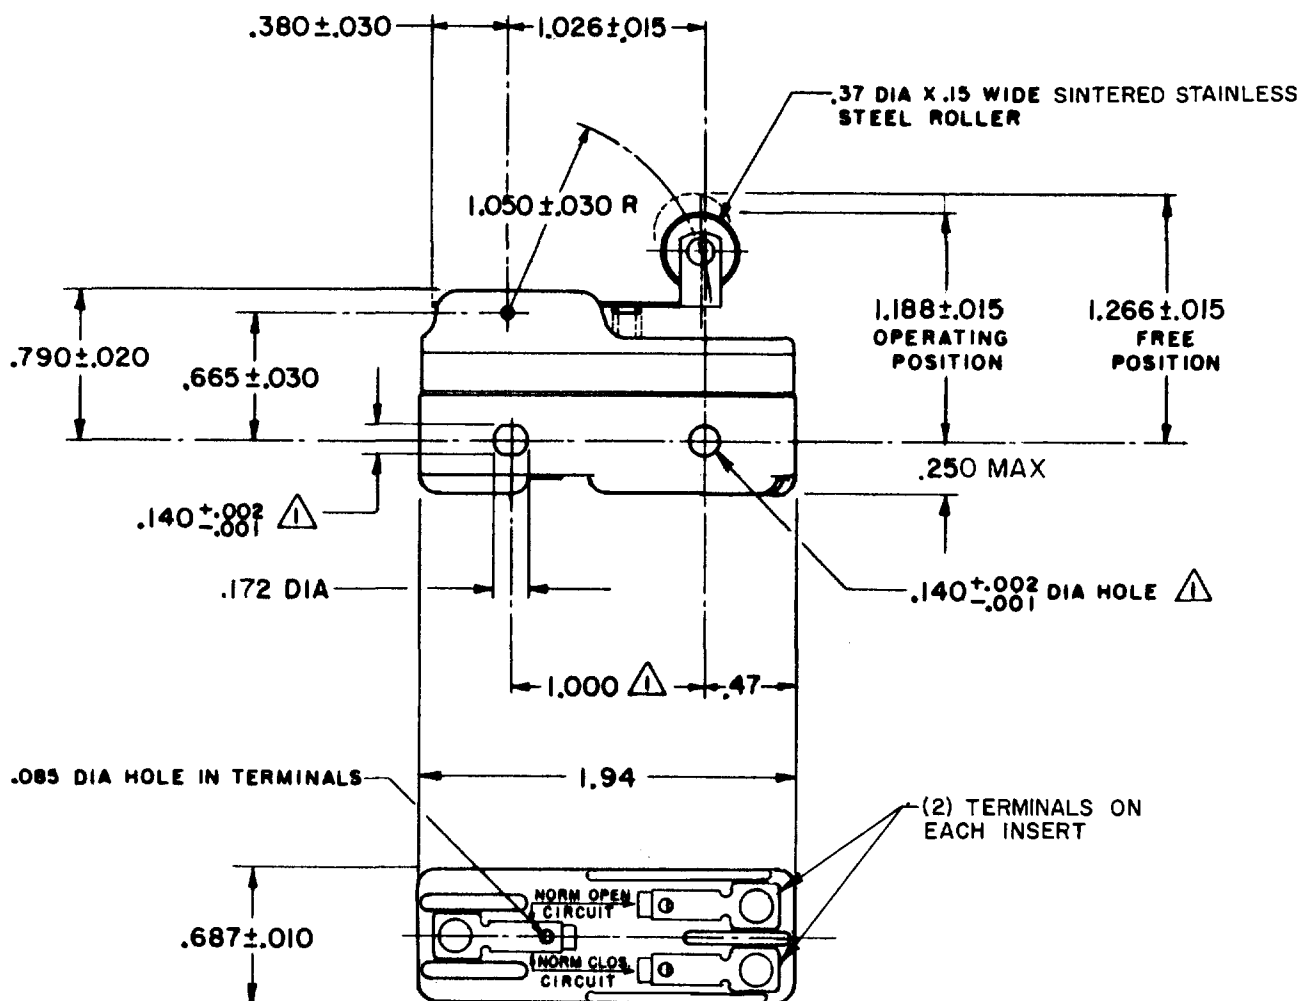
24 MAR 66

DRAWN

R L D

FORMTEK

FC-50378

**NOTE**MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $1.000 \pm .002$ CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 6 OZ MAX

RELEASE FORCE ----- 1 1/2 OZ MIN

DIFFERENTIAL TRAVEL ----- .003-.020

OVERTRAVEL ----- .094 MIN

ELECTRICAL DATA**CONTACT ARRANGEMENT**

S P D T

-L96- 15 A - 125, 250, OR 480 VAC
1/2 A - 125 VDC; 1/4 A - 250 VDC
1/8 HP - 125 VAC; 1/4 HP - 250 VAC

-L288-
-L315-
-L306-



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTEDDIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm$

WEIGHT .063 LB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[BZ-2RW82271](#)