


BS88, IEC269 Industrial HRC Fuse Links

Centre Bolted Tags 415V and 550V ac 250 - 400 Amps



ED

Time-Current Characteristic Curves

Non Motor Rated

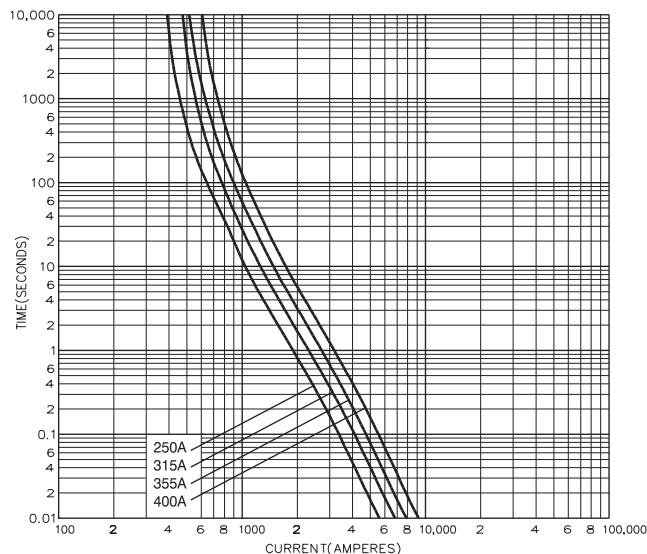


Motor Rated

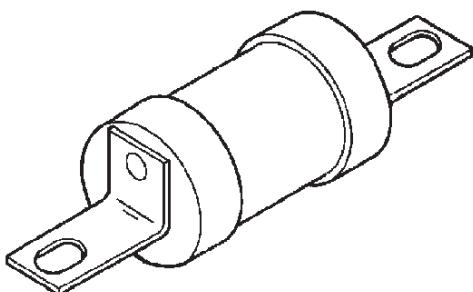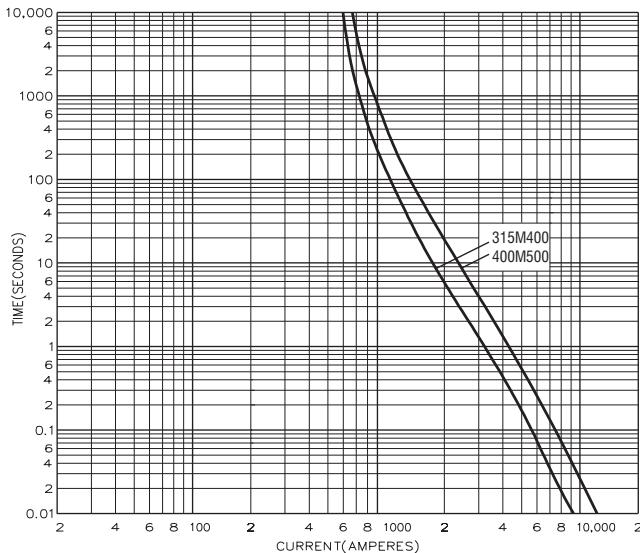

Centre Bolted Tag

Dimensional Data

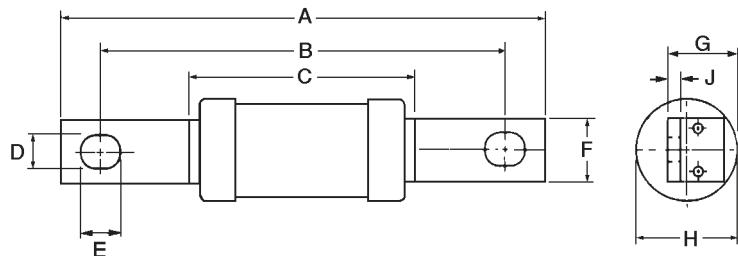

Catalog Number	I ² t (Amps ² Seconds)			Nom. Watts Loss	Rated Voltage	Dimensions (mm)							
	Amp Ratings	Pre-Arcing	Total at 415V			A	B	C	D	E	F	G	H
ED250	250	200,000	480,000	18	415 ac	55.0				19.0	22.5	31.0	3.2
ED315	315	265,000	635,000	22		111.0							
ED315M400	315M400	475,000	1,150,000	15		50.0	136.0		0.35	12.5	25.4	31.0	4.7
ED355	355	360,000	865,000	24									
ED400	400	475,000	1,150,000	29									
ED400M500	400M500	1,200,000	2,700,000	24		75.0							59.0

Packaging - 1 per carton

This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Bussmann Division

Cooper (U.K.) Ltd

Burton-on-the-Wolds
Leicestershire, LE12 5TH
United Kingdom
Tel: (44) (0)1509 88 27 37
Fax: (44) (0)1509 88 27 86

Head Office
St. Louis, MO, U.S.A. Tel: (314) 527-3877 Fax: (800) 544-2570 International Fax: (314) 527-1445



Bussmann Information Fax (00 1) 314 527 1450
Bussmann WEB site - <http://www.bussmann.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cooper Bussmann:](#)

[ED400](#)