



**A**

**Pushbutton**



[www.ck-components.com](http://www.ck-components.com)



A

Pushbutton

# TP Series Tiny Pushbutton Switches

## SWITCH FUNCTION



| NO. POLES                                                                           | MODEL NO. | SWITCH FUNCTION              |        | CONNECTED TERMINALS          |         | SCHEMATIC |
|-------------------------------------------------------------------------------------|-----------|------------------------------|--------|------------------------------|---------|-----------|
|                                                                                     |           | POS. 1                       | POS. 2 | POS. 1                       | POS. 2  |           |
|                                                                                     |           |                              |        |                              |         |           |
|                                                                                     |           | C&K marking on opposite side |        | C&K marking on opposite side |         |           |
| SP                                                                                  | TP11      | OFF                          | MOM.   | OPEN                         | 1-3     | SPST      |
|                                                                                     | TP12      | ON                           | MOM.   | 2-1                          | 2-3     | SPDT      |
| <b>SPDT</b><br><br>Part number shown: TP12SHZQE<br>Terminal Nos. For Reference Only |           |                              |        |                              |         |           |
| DP                                                                                  | TP21      | OFF                          | MOM.   | OPEN                         | 1-3,4-6 | DPST      |
| <b>DPST</b><br><br>Part number shown: TP21SHZQE<br>Terminal Nos. For Reference Only |           |                              |        |                              |         |           |


MOM. = Momentary

All models with all options when ordered with G, Q or R contact material.

## ACTUATOR—SNAP-IN FRONT MOUNT



### J81 SNAP-IN WITH FRAME

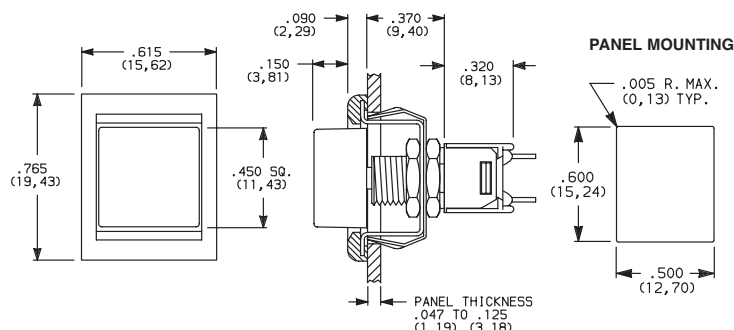

| OPTION CODE | CAP COLOR |
|-------------|-----------|
| 2           | BLACK     |
| 1           | WHITE     |

| OPTION CODE | FRAME COLOR                 |
|-------------|-----------------------------|
| 2           | BLACK                       |
| NONE        | No Frame Color (J80 option) |

Cap and Frame Finish: matte. Other colors available, consult Customer Service Center.  
**NOTE:** Available with Z, C, or W terminations.

**NOTE:** Caps & frames available separately, see page A-20.



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change



# TP Series Tiny Pushbutton Switches



A

Pushbutton

**SH** .155" HIGH PLUNGER,  
.220" HIGH BUSHING,  
THREADED, FLAT











**SH8** .155" HIGH PLUNGER,  
.220" HIGH BUSHING,  
UNTHREADED

**SH9** .155" HIGH PLUNGER,  
.220" HIGH BUSHING,  
UNTHREADED, FLAT

**LT** .215" HIGH PLUNGER,  
.310" HIGH BUSHING,  
THREADED

**MS9** .130" HIGH  
PLUNGER

**LT9** .215" HIGH PLUNGER,  
.310" HIGH BUSHING,  
UNTHREADED



Standard with Z, C, W terminations.

Standard with A, AV, V3 terminations.


Not available with  
Z terminations.

† Subtract .016 (0, 41) for models with A, AV or V3 terminations.


**NOTE:** Caps available for plunger options, see page A-20.

## PANEL MOUNTING

### 10-48 BUSHING




Without locking ring




With standard locking ring

### 1/4 IN. BUSHING



Without locking ring




With standard locking ring

**NOTE:** One mounting nut, locking ring and lockwasher supplied standard with 10-48 threaded bushings (two nuts with 1/4-40 bushings).  
Optional mounting nut and locking ring styles and finishes available separately, see section "Technical Data and Additional Hardware".

## TERMINATIONS




### C PC THRU-HOLE

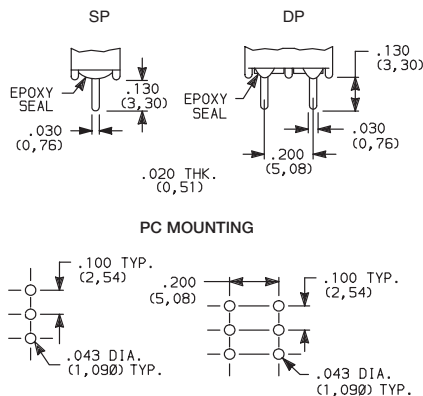


Omit center holes  
for TP11 models

### Z SOLDER LUG

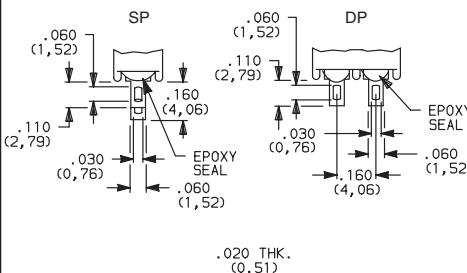

Not available with MS9 bushing or P  
or R contact material.

### W WIRE WRAP

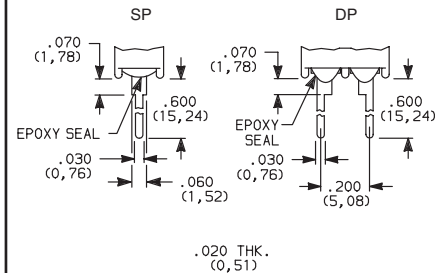

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

**C&K**

**A****Pushbutton**

# TP Series Tiny Pushbutton Switches



## TERMINATIONS



### A RIGHT ANGLE, PC THRU-HOLE




**TP12SH9ABE  
SPDT**

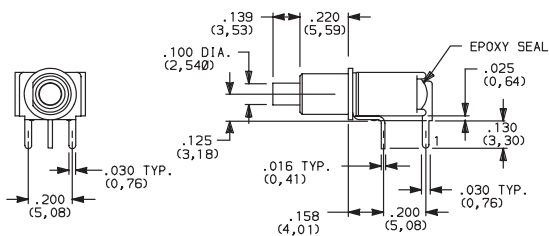

**TP11 Models:  
omit terminal 2.**

#### PC MOUNTING





**TP11 Models:  
omit hole 2.**


### A RIGHT ANGLE, PC THRU-HOLE



**TP21SH9ABE  
DPST**

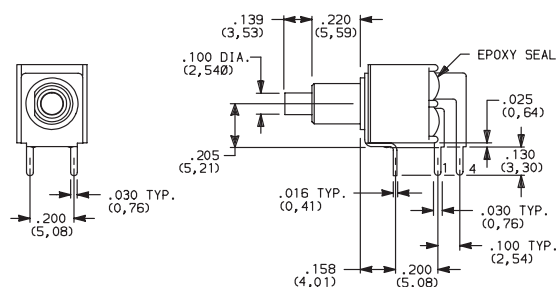




#### PC MOUNTING




### AV VERTICAL RIGHT ANGLE, PC THRU-HOLE



**TP12SH9AVBE  
SPDT**

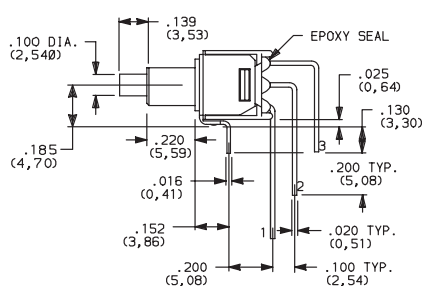

#### PC MOUNTING



**TP11 Models:  
omit hole 2.**




**TP11 Models:  
omit terminal 2.**

**NOTE:** Terminal bend radii and lead-in manufacturing option.


### AV VERTICAL RIGHT ANGLE, PC THRU-HOLE



**TP21SH9AVBE  
DPST**

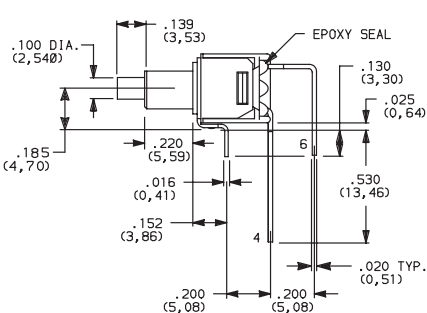

#### PC MOUNTING



**NOTE:** Terminal bend radii and lead-in manufacturing option.



Third Angle  
Projection



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

[www.ck-components.com](http://www.ck-components.com)

# TP Series Tiny Pushbutton Switches




A

Pushbutton


## TERMINATIONS




### V3 VERTICAL MOUNT, V-BRACKET



TP11 Models:  
omit terminal 2.



#### PC MOUNTING





TP11 Models:  
omit hole 2.




TP12SH9V3BE  
SPDT

### V3 VERTICAL MOUNT, V-BRACKET



#### PC MOUNTING



TP21SH9V3BE  
DPST

## CONTACT MATERIAL



| OPTION CODE | CONTACT MATERIAL                | TERMINAL PLATING       | RATINGS                        |                                                                    |
|-------------|---------------------------------|------------------------|--------------------------------|--------------------------------------------------------------------|
| <b>B</b>    | GOLD <sup>1</sup>               | GOLD <sup>1</sup>      | LOW LEVEL/DRY CIRCUIT          | 0.4 VA MAX. @ 20 V AC OR DC MAX.                                   |
| <b>P</b>    |                                 | MATTE-TIN <sup>6</sup> |                                |                                                                    |
| <b>Q</b>    | SILVER <sup>4,5</sup>           | SILVER <sup>5</sup>    | POWER                          | 1 AMP @ 120 V AC OR 28 V DC.                                       |
| <b>G</b>    | GOLD OVER SILVER <sup>2,3</sup> | GOLD <sup>3</sup>      | LOW LEVEL/DRY CIRCUIT OR POWER | 0.4 VA MAX @ 20 V AC OR DC MAX. OR<br>1 AMP @ 120 V AC OR 28 V DC. |
| <b>R</b>    |                                 | MATTE-TIN <sup>6</sup> |                                |                                                                    |

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

<sup>1</sup> CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>2</sup> END CONTACTS: Coin silver, with gold plate over nickel plate.

<sup>3</sup> CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>4</sup> END CONTACTS: Coin silver, silver plated.

<sup>5</sup> CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.

<sup>6</sup> TERMINALS: Copper alloy, with matte-tin over nickel plate.

**NOTE:** Any models supplied with P, R, Q, B or G contact material are RoHS compliant.

All models  with all options when ordered with R, G, or Q contact material.

B contact material standard with A, AV, V3 & W terminations.


Q contact material standard with C & Z terminations

P, R contact materials not available with Z terminations.

## SEAL



### E EPOXY SEAL



Third Angle  
Projection




Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change



# TP Series Tiny Pushbutton Switches

## AVAILABLE HARDWARE

### Cap, .100" DIA. Plungers




#### PART NO.

**508101000** WHITE  
**508102000** BLACK

Material: Nylon  
Finish: Gloss

### Cap, .100" DIA. Plungers (Recommended for S9 plunger)




#### PART NO.

**538701000** WHITE  
**538702000** BLACK

Material: Nylon  
Finish: Gloss

### Cap, .100" DIA. Plungers

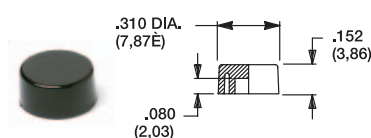


#### PART NO.

**465801000** WHITE  
**465802000** BLACK

Material: Nylon  
Finish: Gloss

### Cap, .120" DIA. Plungers




#### PART NO.

**708901000** WHITE  
**708902000** BLACK

Material: Nylon  
Finish: Gloss

### Cap, .120" DIA. Plungers

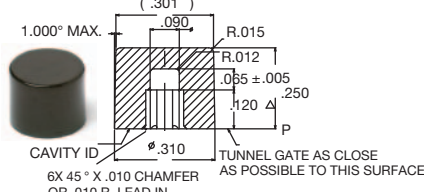


#### PART NO.

**891D01000** WHITE  
**891D02000** BLACK

Material: Nylon  
Finish: Gloss

### Cap, J81 option only

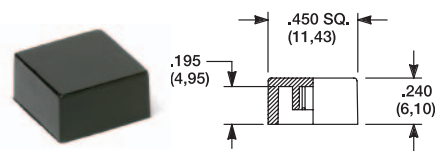

#### PART NO.

**484601000** WHITE  
**484602000** BLACK

Material: Nylon  
Finish: Gloss

#### PART NO.



**798201000** WHITE  
**798202263** BLACK

Material: Nylon  
Finish: Matte

**NOTE:** Additional nuts, locking rings and lockwashers available separately, see section "Technical Data and Additional Hardware".  
Other cap colors available, consult Customer Service Center.

Frames snap into panel opening and are independent from switch mounting. Accurate positioning of the PC mounted switch relative to the panel opening is necessary to provide proper clearance between actuator and frame. Available in two basic styles and four panel thicknesses .047-.125 in. Material: Nylon. Finish: Matte.

### TYPICAL APPLICATION



.047" (1,19) PANEL THK.

**PART NO.**  
**432502263**

.062" (1,57) PANEL THK.

**PART NO.**  
**432602263**

.090" (2,29) PANEL THK.


**PART NO.**  
**432702263**

.125" (3,18) PANEL THK.


**PART NO.**  
**432802263** BLACK

### PANEL MOUNTING

For part numbers  
432502263, 432602263




For part numbers  
432702263, 432802263



### Panel Inserts

L.E.D. (.200 DIA. (5,08E)) SNAPS  
SECURELY INTO INSERT (P/N 8949).  
HEIGHT DEPENDS ON L.E.D. USED.

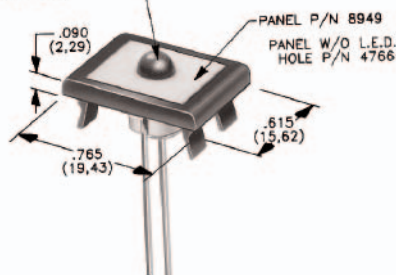

Above frames (part nos. 432XXXXXX) are also available with insert which accepts LED for indicator light assembly. Order insert separately from frame. Blank insert panel (without hole for LED) also available. **LED not included.**

PANEL INSERT  
WITH HOLE FOR LED

**PART NO.**  
**894902000**

BLANK PANEL INSERT  
WITHOUT HOLE FOR LED

**PART NO.**  
**476602000** BLACK



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change