
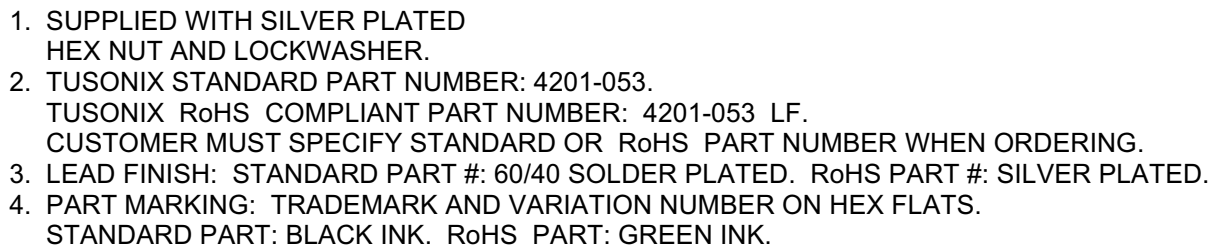


DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

ORIENTATION



MIN. CAP. (pF)	WORKING VOLTAGE (WVdc)		CURRENT (Idc)	I.R. MIN. @ 100 VDC	D.W.V.	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220			
						10 MHz	100 MHz	1 GHz	10 GHz
5500	85°C	125 °C	15 A	10 G	400 VDC				
	200	100				14	55	65	65

X-2015 Rev-0	REVISION RECORD				--TOLERANCES-- Unless Otherwise Specified		Title BUSHING MOUNT PI TYPE EMI FILTER	
	Original Release C.O.	19980310-7-01	0		DECIMAL ±		Drawn S.M. 03-11-98	Scale 4 X
	DIM'S IN METRIC & SYMBOL ORIENTATION & CIRCUIT SYMBOL ADDED L.E. 04-16-03			1		ANGLES ±		Approved H.R. 03-11-98
	ADDED NOTES. S.M. 07-28-05			20030414-3-02		TUCSON TUCSON, ARIZONA	A	4201-053
				20050726-2-28				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tusonix:](#)

[4201-053LF](#)