


THA-170 Lever Handle Latch




Characteristic

The handle can be used for both left and right side.

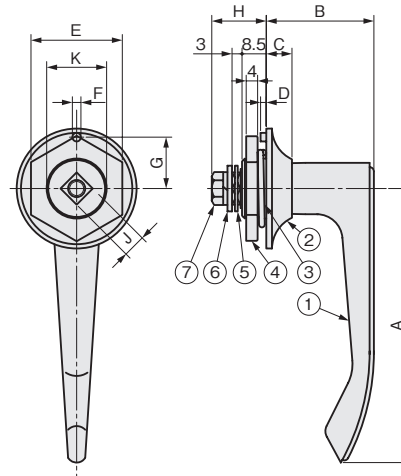


Application

Distribution boards /
Distribution panels

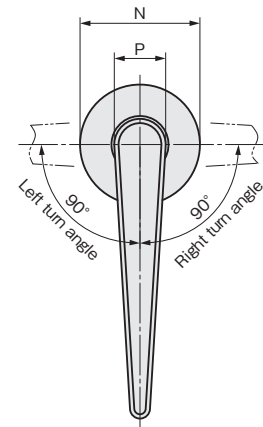

The handle can be used for both left and right side by turning the flange 90°.

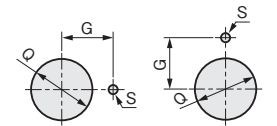

For left turn For right turn

Layout of Holes for Installation

Parts List

No.	Part Name	Material	Finish	Quantity
1	Handle	ZDC	Cr	1
2	Flange			1
3	Ring Washer	SW	Zn	1
4	Hexagon Nut	ZDC		1
5	Square Hole Washer	SPCC		1
6	Flat Washer			1
7	Cross Hole Head Hexagon Bolt	S		1

Size List


Model No.	A	B	C	D	E	F	G	H	J	K	N	P	Q	S	Net Weight(g)	Code No.
THA-170-1	120	44	9	2	32	φ4	20	(18)	□10	M22	φ48	25	φ22.5	φ4.3	295	3870
THA-170-2	96	37.7				φ3	18	(19)	□8	M21	φ42	18	φ21.5	φ3.2	173	3871
THA-170-3	85	35.5	8	1	27	φ3	13			M17	φ33	16	φ17.5	φ3.2	125	3872

THA-171 Lever Handle Latch




Characteristic

The handle can be used for both left and right side.

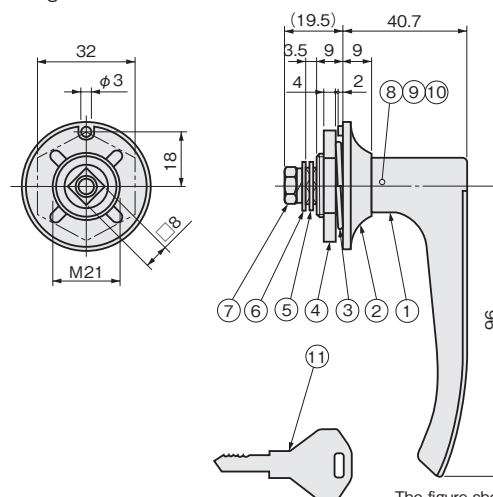


Application

Distribution boards / Distribution panels /
Control boards / Doors for boxes

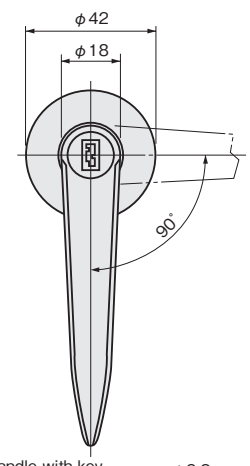

The figure shows the handle with key.

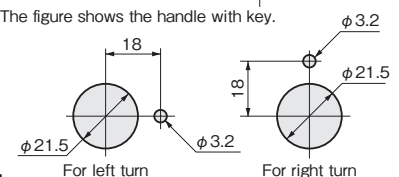

For left turn For right turn

The handle can be used for both left and right side by turning the flange 90°.

Layout of Holes for Installation

Parts List

No.	Part Name	Material	Finish	Quantity
1	Handle	ZDC	Cr	1
2	Flange			1
3	Ring Washer	SW	Zn	1
4	Set Nut	ZDC		1
5	Square Hole Washer	SPCC		1
6	Flat Washer			1
7	Cross Hole Head Hexagon Bolt	S		1
8	Lock	ZDC	Cr	1
9	Rotor	BSBM	—	1
10	Latch			1
11	Key	BSP	Ni	2

Specification

Model No.	Key No.	Net Weight(g)	Code No.
THA-171-1	No.171	213.2	3874
THA-171-2	Without Key	208.8	3875