



SIRIUS, COMPACT STARTER,  
DIRECT STARTER 690 V,  
110 ... 240 V AC/DC, 50 ... 60 Hz,  
1 ... 4 A, IP20,  
CONNECTION MAIN CIRCUIT: SCREW TERMINAL,  
CONNECTION AUXILIARY CIRCUIT: SCREW TERMINAL

**General technical data:**

<b>product brand name</b>	SIRIUS						
<b>product designation</b>	compact starter						
<b>Design of the product</b>	direct starter						
<b>Trip class</b>	CLASS 10 and 20 adjustable						
<b>Product function</b>	<ul style="list-style-type: none"><li>control circuit interface to parallel wiring</li><li>bus-communication</li><li>short circuit protection</li><li>control circuit interface with IO link</li></ul>						
	<table><tr><td>Yes</td></tr><tr><td>No</td></tr><tr><td>Yes</td></tr><tr><td>No</td></tr></table>			Yes	No	Yes	No
Yes							
No							
Yes							
No							
<b>Type of assignment</b>	continuous operation according to IEC 60947-6-2						
<b>Protection class IP</b>	IP20						
<b>Degree of pollution</b>	3						
<b>mounting position / recommended</b>	vertical, on horizontal standard mounting rail						
<b>Installation altitude / at a height over sea level</b>							
• maximum	m	2,000					
<b>Ambient temperature</b>							
• during storage	°C	-55 ... +80					
• during operating	°C	-20 ... +60					
• during transport	°C	-55 ... +80					

<b>Relative humidity</b>		
• during operating phase	%	10 ... 90
<b>Resistance against shock</b>		a=60 m/s <sup>2</sup> (6g) with 10 ms per 3 shocks in all axes
<b>Resistance against vibration</b>		f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s <sup>2</sup> ; 10 cycles
<b>Impulse voltage resistance / rated value</b>	V	6,000
<b>Field-bound parasitic coupling</b>		
• according to IEC 61000-4-3		10 V/m
<b>Insulation voltage / rated value</b>	V	690
<b>Conductor-bound parasitic coupling conductor-earth SURGE</b>		
• according to IEC 61000-4-5		4 kV main contacts, 2 kV auxiliary contacts
<b>Conductor-bound parasitic coupling conductor-conductor SURGE</b>		
• according to IEC 61000-4-5		2 kV main contacts, 1 kV auxiliary contacts
<b>Conductor-bound parasitic coupling BURST</b>		
• according to IEC 61000-4-4		4 kV main contacts, 2 kV auxiliary contacts
<b>Maximum permissible voltage for safe disconnection</b>		
• between main circuit and auxiliary circuit	V	400
• between control and auxiliary circuit	V	300
• between auxiliary circuit and auxiliary circuit	V	250
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q

<b>Main circuit:</b>		
<b>Operating voltage / at AC-3 / rated value</b>	V	690
• maximum		
<b>Number of poles / for main current circuit</b>		3
<b>Adjustable response current</b>	A	1 ... 4
• of the current-dependent overload release		
<b>Formula for making capacity limit current</b>		12 x I <sub>e</sub>
<b>Formula for interruption capacity limit current</b>		10 x I <sub>e</sub>
<b>Emitted mechanical power / for 4-pole three-phase motor</b>		
• at 400 V / rated value	kW	1.5
• at 500 V / rated value	kW	2.2
• at 690 V / rated value	kW	3
<b>Service power / at AC-3 / at 400 V / rated value</b>	W	1,500
<b>Frequency of operation / at AC-41 / according to IEC 60947-6-2 / maximum</b>	1/h	750
<b>Frequency of operation / at AC-43 / according to IEC 60947-6-2 / maximum</b>	1/h	250

<b>Off-load operating frequency</b>	1/h	3,600
<b>Mechanical operating cycles as operating time</b>		
• of the main contacts / typical		10,000,000
• of the auxiliary contacts / typical		10,000,000
• of the signal contacts / typical		10,000,000

<b>Control circuit:</b>		
<b>type of voltage</b>		AC
<b>Control supply voltage / 1</b>		
• for DC		
• initial rated value	V	110
• final rated value	V	240
• at 50 Hz / for AC		
• initial rated value	V	110
• final rated value	V	240
• at 60 Hz / for AC		
• initial rated value	V	110
• final rated value	V	240
<b>Holding power</b>		
• for AC / maximum	W	6
• for DC / maximum	W	5.1
<b>Switch-off delay time</b>	ms	50
<b>Start-up delay time</b>	ms	70

<b>Auxiliary circuit:</b>		
<b>Product extension</b>		
• auxiliary switch		Yes
<b>Number of NC contacts</b>		
• for auxiliary contacts		1
<b>Number of NO contacts</b>		
• for auxiliary contacts		1
• of the non-delayed short-circuit release / for alarm contact		1
<b>Number of changeover contacts / of the current-dependent overload release / for alarm contact</b>		1
<b>Operating current / of the auxiliary contacts / at AC-12</b>		
• maximum	A	10
<b>Electrical switching cycle as operating time / of the auxiliary contacts</b>		
• at AC-15 / at 6 A / at 230 V / typical		500,000
• at DC-13 / at 6 A / at 24 V / typical		100,000

<b>Electrical switching cycle as operating time / of the signal contacts</b>		
• at AC-15 / at 6 A / at 230 V / typical		500,000
• at DC-13 / at 6 A / at 24 V / typical		100,000

#### Short-circuit:

**Design of the fuse link / for short-circuit protection of the auxiliary switch**

- required

fuse gL/gG: 10 A

#### Installation/mounting/dimensions:

<b>Type of mounting</b>		screw and snap-on mounting
<b>Width</b>	mm	45
<b>Height</b>	mm	170
<b>Depth</b>	mm	165
<b>mounting position</b>		any

#### Connections:

<b>Product function</b>		
• removable terminal for main circuit		Yes
• removable terminal for auxiliary and control circuit		Yes
<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
• for main contacts		2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
• solid		
• finely stranded		2x (1.5 ... 6 mm <sup>2</sup> )
• with conductor end processing		
• for auxiliary contacts		0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )
• solid		
• finely stranded		0.5 ... 2.5 mm <sup>2</sup> , 2x (0.5 ... 1.5 mm <sup>2</sup> )
• with conductor end processing		
• for AWG conductors		2x (16 ... 10), 1x 8
• for main contacts		
• for auxiliary contacts		2x (20 ... 14)

#### Certificates/approvals:

<b>Verification of suitability</b>		IEC / EN 60947-6-2
------------------------------------	--	--------------------

General Product Approval	EMC	Functional Safety / Safety of Machinery
--------------------------	-----	---



Test Certificates	Shipping Approval
-------------------	-------------------

[Type Test Certificates/Test Report](#)



other

[Declaration of Conformity](#)

other

[Environmental Confirmations](#)

### UL/CSA ratings:

**yielded mechanical performance (hp) / for three-phase squirrel cage motors**

• at 200/208 V / rated value	hp	0.75
• at 220/230 V / rated value	hp	0.75
• at 460/480 V / rated value	hp	2
• at 575/600 V / rated value	hp	3

**Operating current (FLA) / for three-phase squirrel cage motors**

• at 480 V / rated value	A	4
• at 600 V / rated value	A	4

**Contact rating designation / for auxiliary contacts / according to UL**

contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

### Reliability figures:

<b>B10 value</b>		3,000,000
<b>Proportion of dangerous failures</b>	%	50
<b>Proportion of dangerous failures / with low demand rate / according to SN 31920</b>	%	40
<b>Protection against electrical shock</b>		finger-safe
<b>Failure rate (FIT value) / with low demand rate / according to SN 31920</b>	FIT	100

### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**



<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**

<http://www.siemens.com/cax>

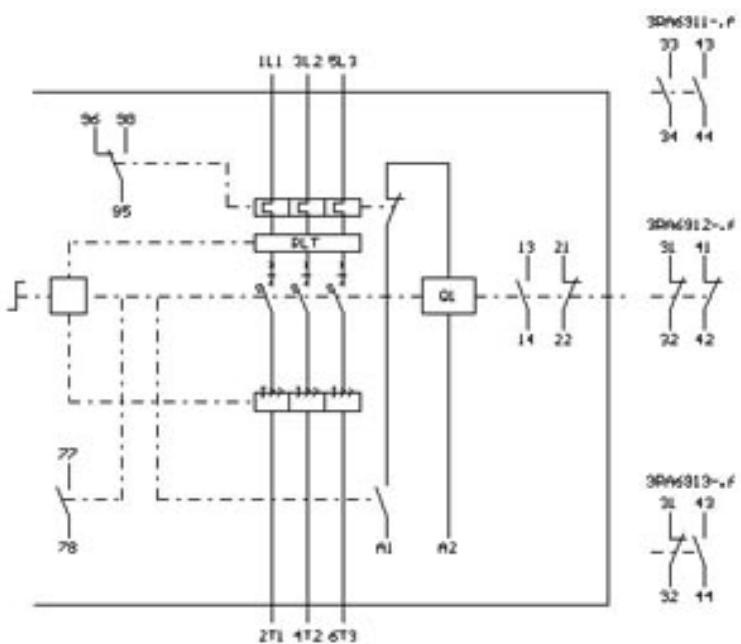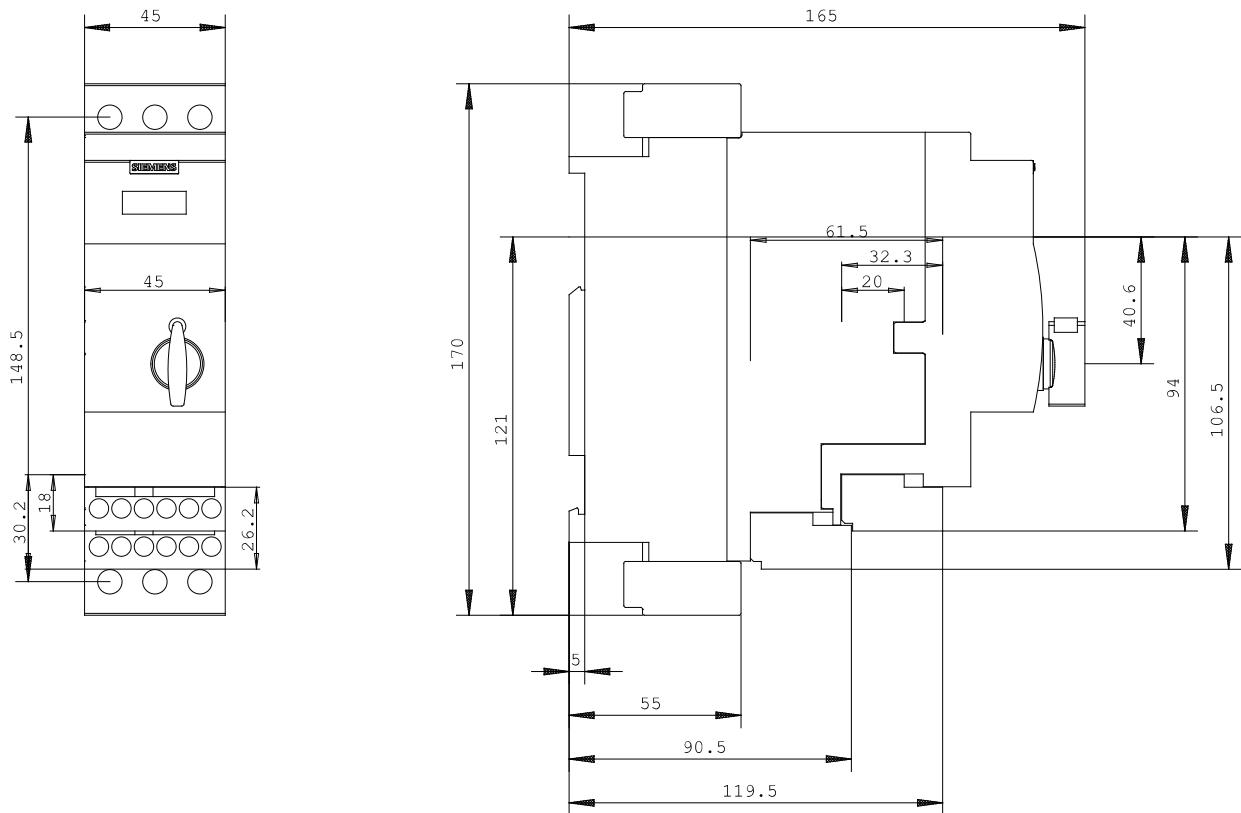

**last change:**

Dec 17, 2012