

SWITCH-BASIC

4SE1-6

REPLACES

RELEASE NO. PR-11739


M

DRAWING
NUMBERISSUE
X

CHECK

REVISIONS


A	RE-INST PRI1739
	TSK 9 DEC 82
B	CO-54473
D J S	2 FEB 84

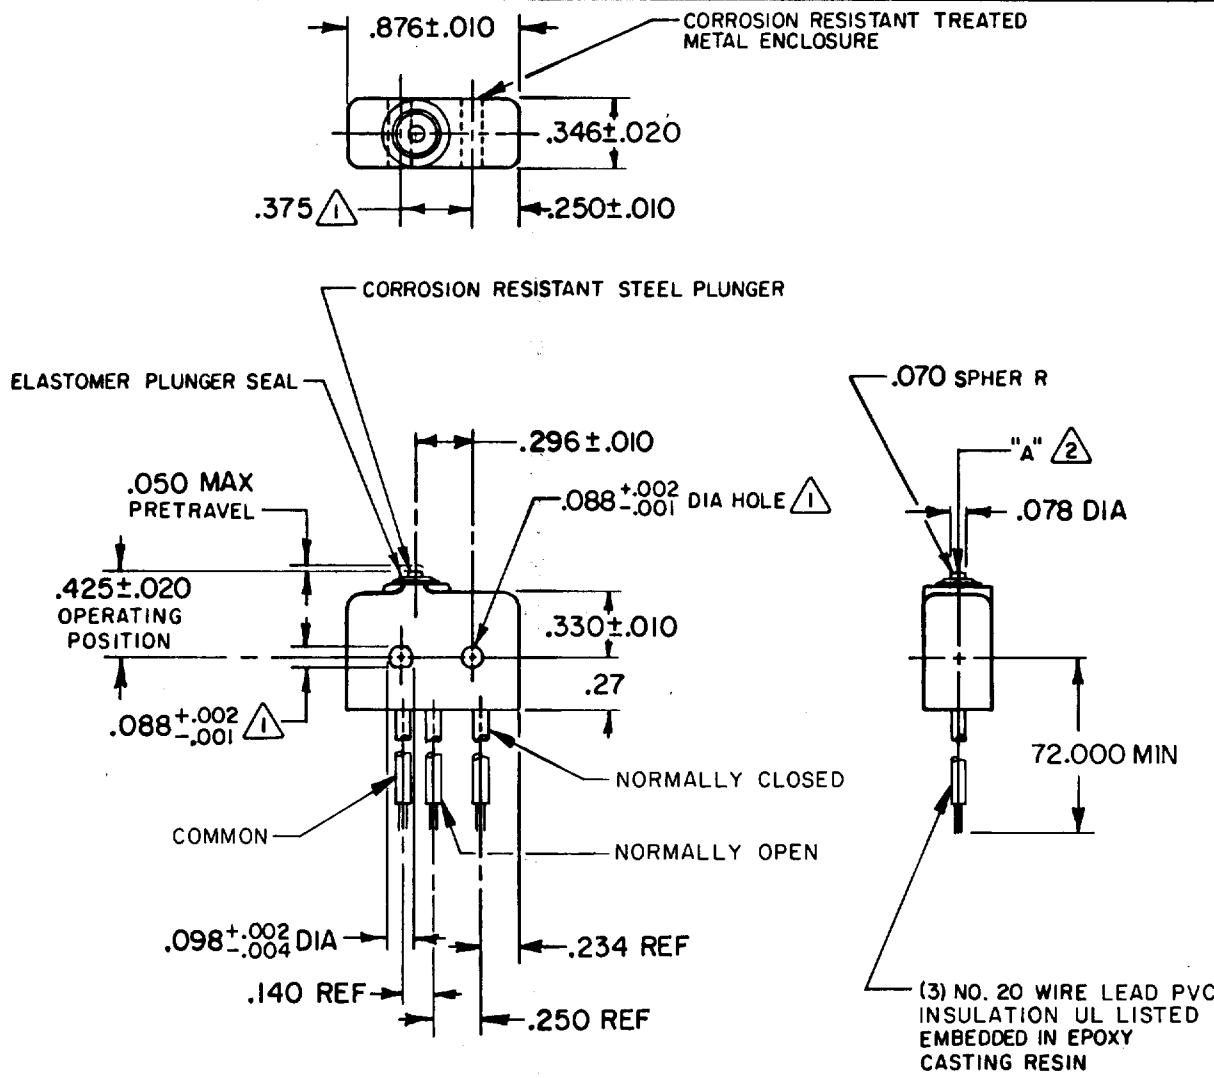

NOTES

- ① MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ± .002 CENTERS
- ② ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
- ③ WEIGHT OF SWITCH ONLY IS .26 OZ MAX, WEIGHT OF SWITCH WITH WIRE LEADS IS 2.5 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

OPERATING FORCE ----- 5-17 OZ

CONTACT ARRANGEMENT
S P D T

DO NOT SCALE PRINT

RELEASE FORCE ----- 4 OZ MIN

L4

TOLERANCES

RELEASE TRAVEL ----- .004 MIN

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE \pm

DIFFERENTIAL TRAVEL ----- .004 MAX

5A 250 VAC

DIM. TOL. DIM. TOL.
mm mm/in in mm/in

OVERTRAVEL ----- .003 MIN

NO PLACES X 1.04
ONE PLACE X,X 0.47/016
TWO PLACES X,X,X 0.18/.008
THREE PLACES X,X,X 0.50/.015
ANGLES X,XXX 0.15/.005DESIGN UNITS SI METRIC US CUSTOMARYWEIGHT 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[4SE1-6](#)