


# 3AB Equivalent – 6 x 30mm Miniature Ceramic




## Features

- Available in Fast Acting and Slow Blow Types
- RoHS Compliant

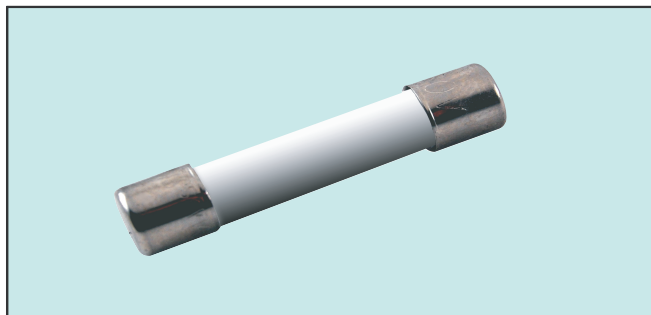

## F-04

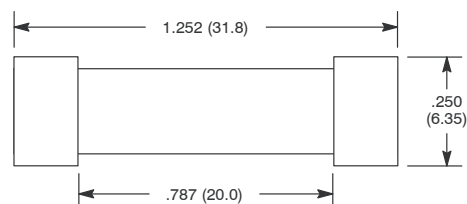

## Specifications

**Rated Voltage:** 125V / 250V

**Breaking Capacity:** 125VAC, 10kA; 250VAC, 200A

**Time Current Characteristics:**

### Fast Acting

| % of Ampere Rating | Opening Time     |
|--------------------|------------------|
| 110%               | 4 hours min.     |
| 135%               | 1 hour max.      |
| 200%               | 120 seconds max. |

### Slow Blow

| % of Ampere Rating | Opening Time    |                  |
|--------------------|-----------------|------------------|
|                    | 100mA to 3A     | 4A to 20A        |
| 110%               | 4 hours min.    | 4 hours min.     |
| 135%               | 1 hour max.     | 1 hour max.      |
| 200%               | 5 – 120 seconds | 12 – 120 seconds |

## Ordering Information:

| NTE Type No.  |             | Rated Current | Diag No. |
|---------------|-------------|---------------|----------|
| Fast Acting   | Slow Blow   |               |          |
|               | 74-6SC100MA | 100mA         | F-04     |
| 74-6FC125MA   | 74-6SC125MA | 125mA         | F-04     |
|               | 74-6SC150MA | 150mA         | F-04     |
|               | 74-6SC175MA | 175mA         | F-04     |
|               | 74-6SC187MA | 187mA         | F-04     |
|               | 74-6SC200MA | 200mA         | F-04     |
| 74-6FC250MA   | 74-6SC250MA | 250mA         | F-04     |
|               | 74-6SC300MA | 300mA         | F-04     |
| 74-6FC375MA   | 74-6SC375MA | 375mA         | F-04     |
|               | 74-6SC400MA | 400mA         | F-04     |
| 74-6FC500MA   | 74-6SC500MA | 500mA         | F-04     |
|               | 74-6SC600MA | 600mA         | F-04     |
|               | 74-6SC700MA | 700mA         | F-04     |
| 74-6FC750MA   | 74-6SC750MA | 750mA         | F-04     |
| 74-6FC1A      | 74-6SC1A    | 1.0A          | F-04     |
|               | 74-6SC1.25A | 1.25A         | F-04     |
|               | 74-6SC1.5A  | 1.5A          | F-04     |
|               | 74-6SC1.6A  | 1.6A          | F-04     |
| 74-6FC2A      | 74-6SC2A    | 2.0A          | F-04     |
|               | 74-6SC2.5A  | 2.5A          | F-04     |
| 74-6FC3A      | 74-6SC3A    | 3.0A          | F-04     |
| 74-6FC4A      | 74-6SC4A    | 4.0A          | F-04     |
| 74-6FC5A      | 74-6SC5A    | 5.0A          | F-04     |
| 74-6FC6A      |             | 6.0A          | F-04     |
|               | 74-6SC6.25A | 6.25A         | F-04     |
| 74-6FC7A      | 74-6SC7A    | 7.0A          | F-04     |
| 74-6FC8A      | 74-6SC8A    | 8.0A          | F-04     |
| 74-6FC10A     | 74-6SC10A   | 10A           | F-04     |
| 74-6FC12A     | 74-6SC12A   | 12A           | F-04     |
| 74-6FC15A     | 74-6SC15A   | 15A           | F-04     |
| 74-6FC20A     | 74-6SC20A   | 20A           | F-04     |
| NEW 74-6FC25A |             | 25A           | F-04     |