


SPECIFICATION SHEET**JFW MODEL 57Z-2G NM/BF-DC****IMPEDANCE MATCHING PAD W/ DC BLOCK**

JFW Industries, Inc.
Phone: 317-887-1340
sales@jfwindustries.com
www.jfwindustries.com

Frequency Range	10-2000 MHz
Impedance	50 to 75 Ohm
Return Loss	20 dB minimum
Attenuation Loss	5.7 dB $\pm$ 0.5 dB
RF Input Power	1 Watt average
DC Breakdown Voltage	100 Volts
RF Connector	50 Ohm N male 75 Ohm BNC female
Operating Temperature Range	0°C to +60°C
Physical Size	See outline drawing 092-2444

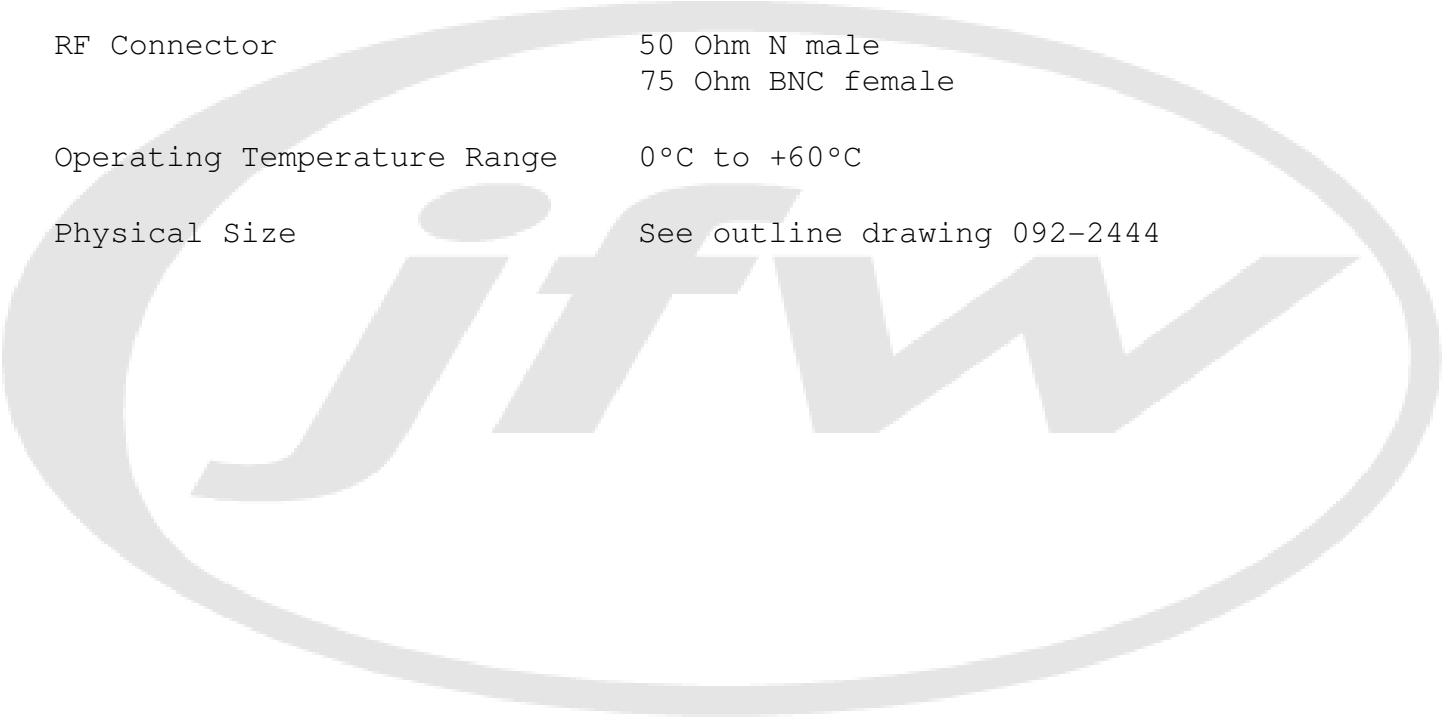

ECR/ECN #	DATE	REV	APPR / DATE	ECR/ECN #	DATE	REV	APPR / DATE
	05/15/1996						
9999	08/27/2003	A	SL 11/11/2004				