


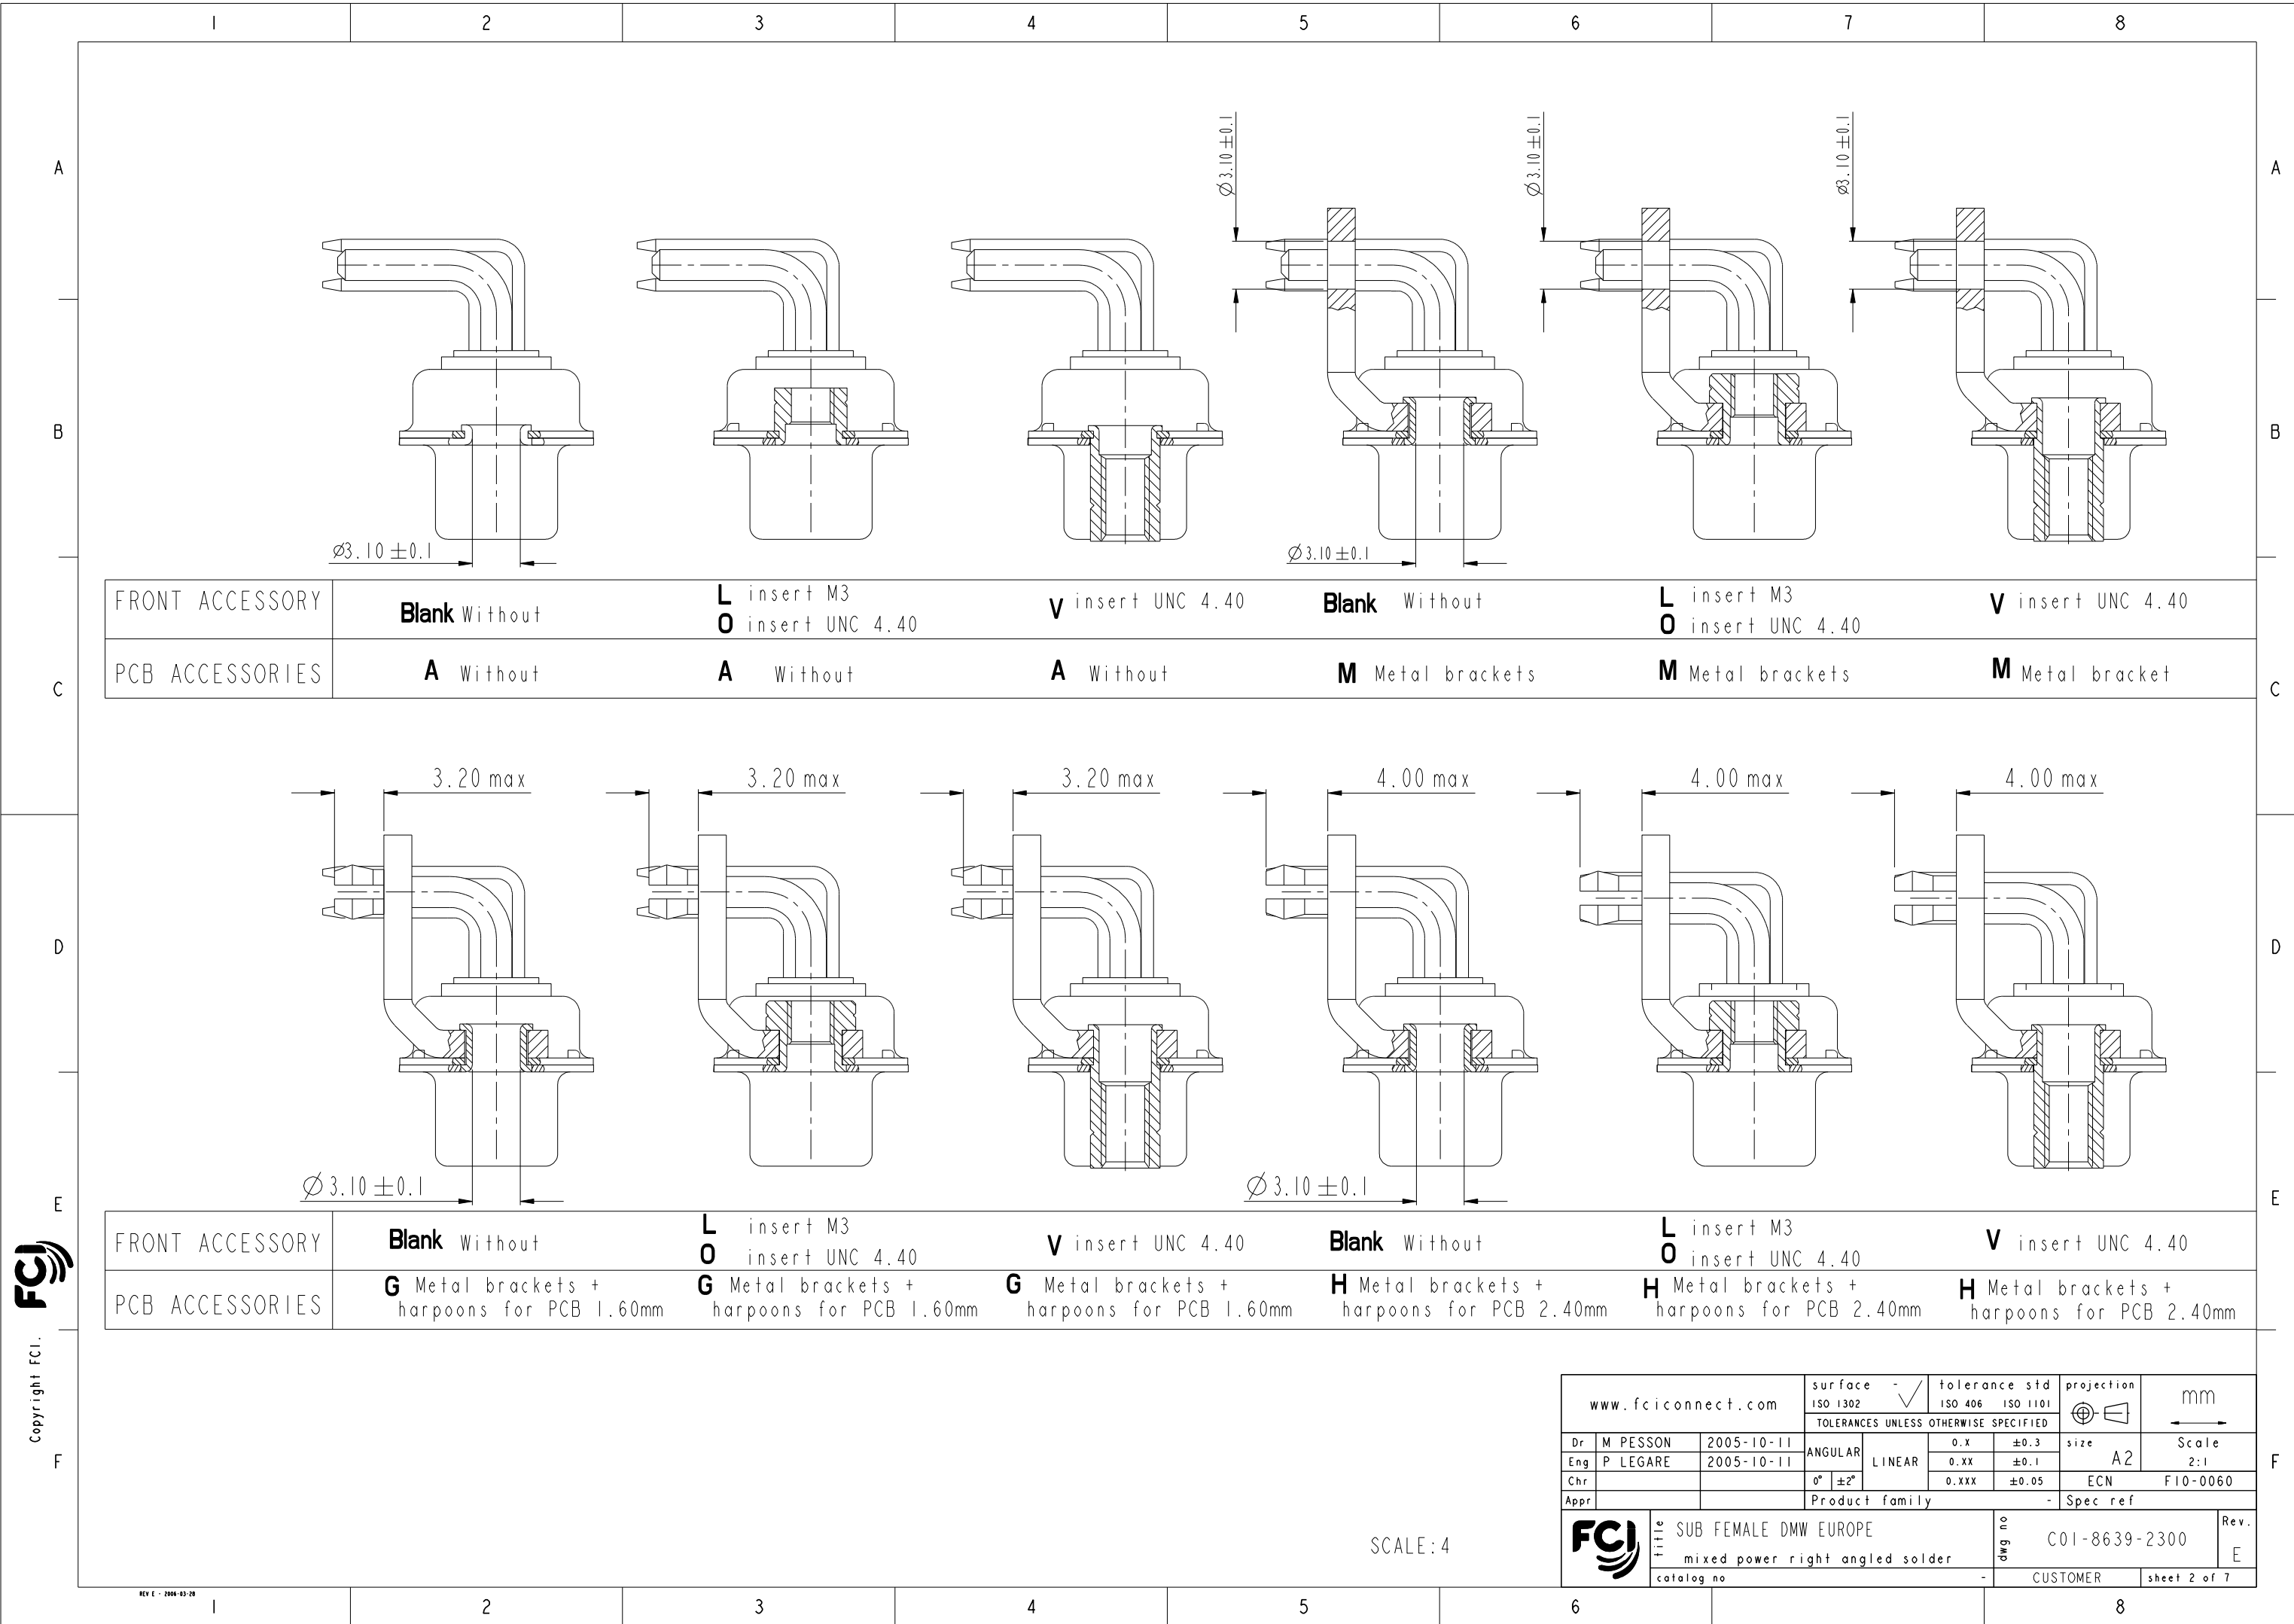





www.fciconnect.com			surface - 		tolerance std		projection		mm		
			ISO 1302		ISO 406 ISO 1101						
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X ±0.3		size	A2	Scale		
Eng	P LEGARE	2005-10-11			0.XX ±0.1				2:1		
Chr					0.XXX ±0.05				ECN F10-0060		
Appr			Product family					- Spec ref			
			SUB FEMALE DMW EUROPE					dwg no		C01-8639-2300	
			mixed power right angled solder							Rev.	
			catalog no					-		CUSTOMER	
										sheet 2 of 7	

I		2		3		4		5		6		7		8																																																																																								
A	<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS500A30LF</td><td>30</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A30LF</td><td>30</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A30LF	30	200	without	without	D*LxWxS500A30LF	30	200	insert M3	without	D*OxWxS500A30LF	30	200	insert UNC 4.40	without	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm	B	<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS500G30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M30LF</td><td>30</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M30LF</td><td>30</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M30LF</td><td>30</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M30LF</td><td>30</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M30LF	30	200	without	metal bracket	D*LxWxS500M30LF	30	200	insert M3	metal bracket	D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket	D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket	C
	PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																	
	D*xWxS500A30LF	30	200	without	without																																																																																																	
	D*LxWxS500A30LF	30	200	insert M3	without																																																																																																	
	D*OxWxS500A30LF	30	200	insert UNC 4.40	without																																																																																																	
	D*VxWxS500A30LF	30	200	female screw UNC 4.40	without																																																																																																	
	D*xWxS500H30LF	30	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*LxWxS500H30LF	30	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*OxWxS500H30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																	
	D*VxWxS500H30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																	
D*xWxS500G30LF	30	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS500G30LF	30	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS500G30LF	30	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS500G30LF	30	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS500M30LF	30	200	without	metal bracket																																																																																																		
D*LxWxS500M30LF	30	200	insert M3	metal bracket																																																																																																		
D*OxWxS500M30LF	30	200	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS500M30LF	30	200	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS500A40LF</td><td>40</td><td>200</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS500A40LF</td><td>40</td><td>200</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS500A40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS500A40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS500H40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS500H40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS500H40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS500H40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS500G40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS500A40LF	40	200	without	without	D*LxWxS500A40LF	40	200	insert M3	without	D*OxWxS500A40LF	40	200	insert UNC 4.40	without	D*VxWxS500A40LF	40	200	female screw UNC 4.40	without	D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm																																																
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS500A40LF	40	200	without	without																																																																																																		
D*LxWxS500A40LF	40	200	insert M3	without																																																																																																		
D*OxWxS500A40LF	40	200	insert UNC 4.40	without																																																																																																		
D*VxWxS500A40LF	40	200	female screw UNC 4.40	without																																																																																																		
D*xWxS500H40LF	40	200	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS500H40LF	40	200	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS500H40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS500H40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS500G40LF	40	200	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS500G40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS500G40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS500G40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS500M40LF</td><td>40</td><td>200</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS500M40LF</td><td>40</td><td>200</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS500M40LF</td><td>40</td><td>200</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS500M40LF</td><td>40</td><td>200</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS500M40LF	40	200	without	metal bracket	D*LxWxS500M40LF	40	200	insert M3	metal bracket	D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket	D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS500G40LF	40	200	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS500G40LF	40	200	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS500G40LF	40	200	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS500M40LF	40	200	without	metal bracket																																																																																																		
D*LxWxS500M40LF	40	200	insert M3	metal bracket																																																																																																		
D*OxWxS500M40LF	40	200	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS500M40LF	40	200	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS543A30LF</td><td>30</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A30LF</td><td>30</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A30LF	30	500	without	without	D*LxWxS543A30LF	30	500	insert M3	without	D*OxWxS543A30LF	30	500	insert UNC 4.40	without	D*VxWxS543A30LF	30	500	female screw UNC 4.40	without	D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm																																																
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS543A30LF	30	500	without	without																																																																																																		
D*LxWxS543A30LF	30	500	insert M3	without																																																																																																		
D*OxWxS543A30LF	30	500	insert UNC 4.40	without																																																																																																		
D*VxWxS543A30LF	30	500	female screw UNC 4.40	without																																																																																																		
D*xWxS543H30LF	30	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS543H30LF	30	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS543H30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS543H30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS543G30LF	30	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS543G30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M30LF</td><td>30</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M30LF</td><td>30</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M30LF</td><td>30</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M30LF</td><td>30</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M30LF	30	500	without	metal bracket	D*LxWxS543M30LF	30	500	insert M3	metal bracket	D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket	D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS543G30LF	30	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS543G30LF	30	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS543G30LF	30	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS543M30LF	30	500	without	metal bracket																																																																																																		
D*LxWxS543M30LF	30	500	insert M3	metal bracket																																																																																																		
D*OxWxS543M30LF	30	500	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS543M30LF	30	500	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*xWxS543A40LF</td><td>40</td><td>500</td><td>without</td><td>without</td></tr><tr><td>D*LxWxS543A40LF</td><td>40</td><td>500</td><td>insert M3</td><td>without</td></tr><tr><td>D*OxWxS543A40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>without</td></tr><tr><td>D*VxWxS543A40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>without</td></tr><tr><td>D*xWxS543H40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*LxWxS543H40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*OxWxS543H40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*VxWxS543H40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 2.40mm</td></tr><tr><td>D*xWxS543G40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket+harpoon PCB 1.60mm</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*xWxS543A40LF	40	500	without	without	D*LxWxS543A40LF	40	500	insert M3	without	D*OxWxS543A40LF	40	500	insert UNC 4.40	without	D*VxWxS543A40LF	40	500	female screw UNC 4.40	without	D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm	D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm	D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm	D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm																																																
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*xWxS543A40LF	40	500	without	without																																																																																																		
D*LxWxS543A40LF	40	500	insert M3	without																																																																																																		
D*OxWxS543A40LF	40	500	insert UNC 4.40	without																																																																																																		
D*VxWxS543A40LF	40	500	female screw UNC 4.40	without																																																																																																		
D*xWxS543H40LF	40	500	without	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*LxWxS543H40LF	40	500	insert M3	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*OxWxS543H40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*VxWxS543H40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 2.40mm																																																																																																		
D*xWxS543G40LF	40	500	without	metal bracket+harpoon PCB 1.60mm																																																																																																		
<table><tr><th>PART NUMBER</th><th>AMPS</th><th>MATINGS/ UNMATINGS</th><th>FRONT ACCESSORY</th><th>PCB ACCESSORIES</th></tr><tr><td>D*LxWxS543G40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*OxWxS543G40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*VxWxS543G40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket+harpoon PCB 1.60mm</td></tr><tr><td>D*xWxS543M40LF</td><td>40</td><td>500</td><td>without</td><td>metal bracket</td></tr><tr><td>D*LxWxS543M40LF</td><td>40</td><td>500</td><td>insert M3</td><td>metal bracket</td></tr><tr><td>D*OxWxS543M40LF</td><td>40</td><td>500</td><td>insert UNC 4.40</td><td>metal bracket</td></tr><tr><td>D*VxWxS543M40LF</td><td>40</td><td>500</td><td>female screw UNC 4.40</td><td>metal bracket</td></tr></table>					PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES	D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm	D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm	D*xWxS543M40LF	40	500	without	metal bracket	D*LxWxS543M40LF	40	500	insert M3	metal bracket	D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket	D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket																																																										
PART NUMBER	AMPS	MATINGS/ UNMATINGS	FRONT ACCESSORY	PCB ACCESSORIES																																																																																																		
D*LxWxS543G40LF	40	500	insert M3	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*OxWxS543G40LF	40	500	insert UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*VxWxS543G40LF	40	500	female screw UNC 4.40	metal bracket+harpoon PCB 1.60mm																																																																																																		
D*xWxS543M40LF	40	500	without	metal bracket																																																																																																		
D*LxWxS543M40LF	40	500	insert M3	metal bracket																																																																																																		
D*OxWxS543M40LF	40	500	insert UNC 4.40	metal bracket																																																																																																		
D*VxWxS543M40LF	40	500	female screw UNC 4.40	metal bracket																																																																																																		
<table><tr><th colspan="2">www.fciconnect.com</th><th>surface ISO 1302</th><th>tolerance std ISO 406 ISO 1101</th><th>projection</th><th>mm</th></tr><tr><td colspan="2"></td><td colspan="2">TOLERANCES UNLESS OTHERWISE SPECIFIED</td><td></td><td></td></tr><tr><td>Dr</td><td>M PESSON</td><td>2005-10-11</td><td rowspan="3">ANGULAR LINEAR</td><td>0.X ±0.3</td><td rowspan="3">size A2</td></tr><tr><td>Eng</td><td>P LEGARE</td><td>2005-10-11</td><td>0.XX ±0.1</td></tr><tr><td>Chr</td><td></td><td></td><td>0.XXX ±0.05</td></tr><tr><td>Appr</td><td></td><td></td><td colspan="2">Product family</td><td>- Spec ref</td></tr><tr><td colspan="2"></td><td colspan="2">SUB FEMALE DMW EUROPE</td><td>dwg no</td><td>Rev.</td></tr><tr><td colspan="2"></td><td colspan="2">mixed power right angled solder</td><td>C01-8639-2300</td><td>E</td></tr><tr><td colspan="2"></td><td colspan="2">catalog no</td><td>CUSTOMER</td><td>sheet 3 of 7</td></tr></table>					www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm			TOLERANCES UNLESS OTHERWISE SPECIFIED				Dr	M PESSON	2005-10-11	ANGULAR LINEAR	0.X ±0.3	size A2	Eng	P LEGARE	2005-10-11	0.XX ±0.1	Chr			0.XXX ±0.05	Appr			Product family		- Spec ref			SUB FEMALE DMW EUROPE		dwg no	Rev.			mixed power right angled solder		C01-8639-2300	E			catalog no		CUSTOMER	sheet 3 of 7																																																
www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm																																																																																																	
		TOLERANCES UNLESS OTHERWISE SPECIFIED																																																																																																				
Dr	M PESSON	2005-10-11	ANGULAR LINEAR	0.X ±0.3	size A2																																																																																																	
Eng	P LEGARE	2005-10-11		0.XX ±0.1																																																																																																		
Chr				0.XXX ±0.05																																																																																																		
Appr			Product family		- Spec ref																																																																																																	
		SUB FEMALE DMW EUROPE		dwg no	Rev.																																																																																																	
		mixed power right angled solder		C01-8639-2300	E																																																																																																	
		catalog no		CUSTOMER	sheet 3 of 7																																																																																																	
REV E - 2006-03-28		I		2		3		4		5		6		8																																																																																								

5W1

LAYOUT AND CONNECTOR DIMENSIONS

For PCB hole diameters see table I sheet I

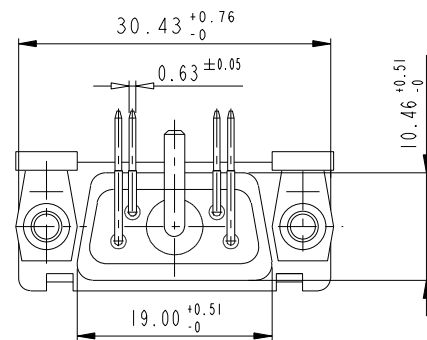
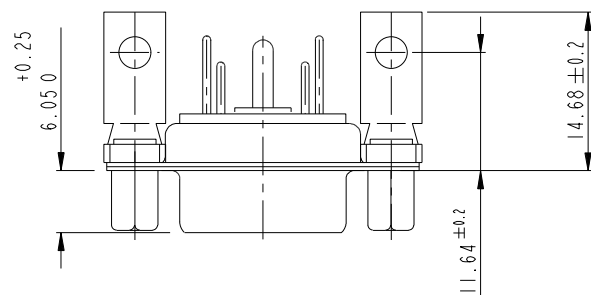
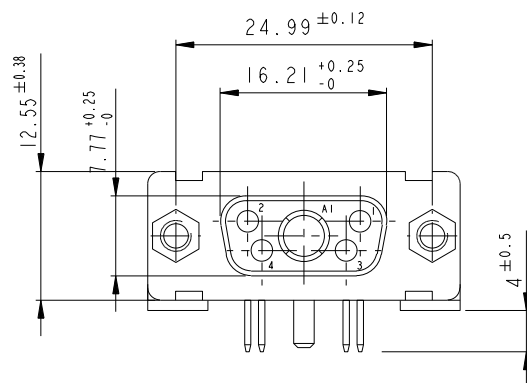
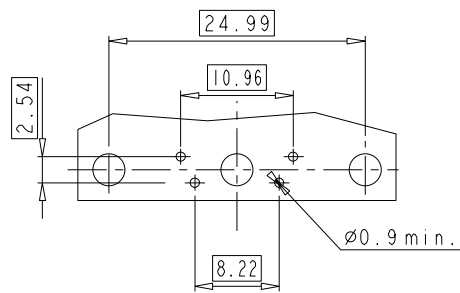


Floating signal contacts

11W1

LAYOUT AND CONNECTOR DIMENSIONS







For PCB hole diameters see table I sheet I

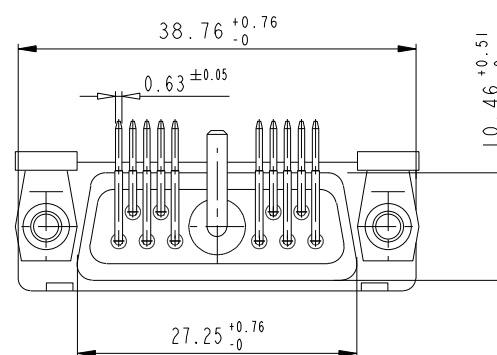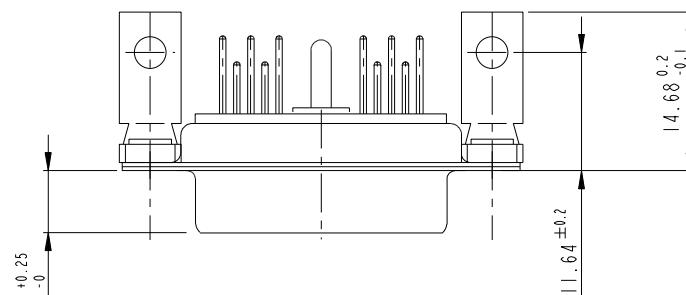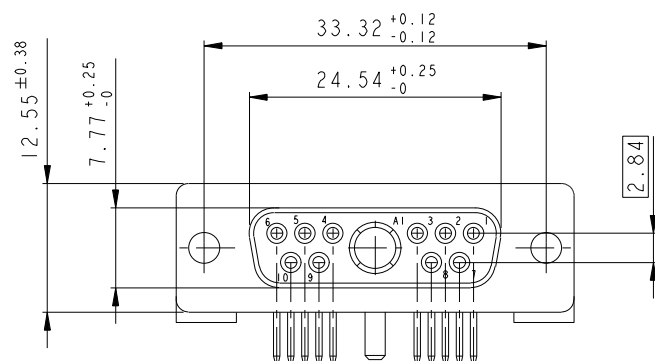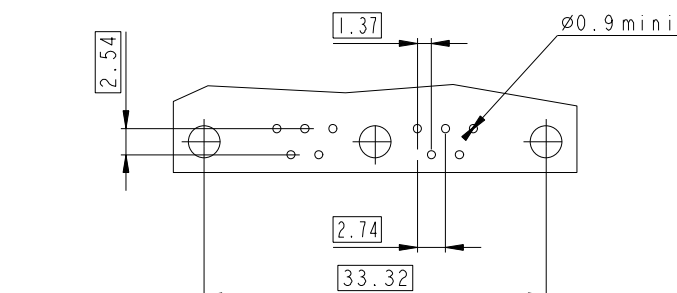

7W2

LAYOUT AND CONNECTOR DIMENSIONS

For PCB hole diameters see table I sheet I

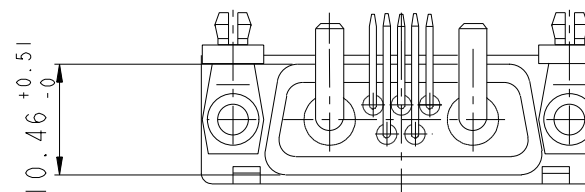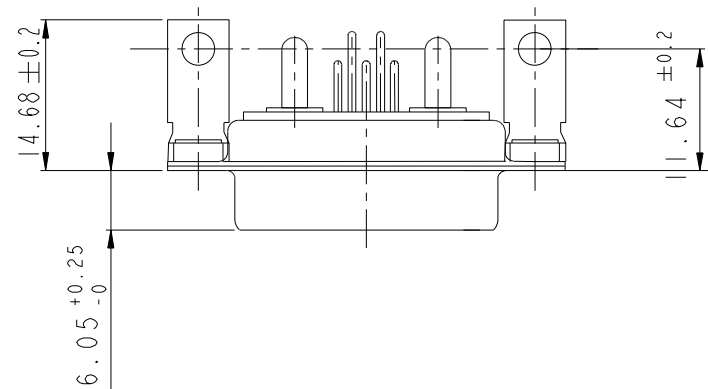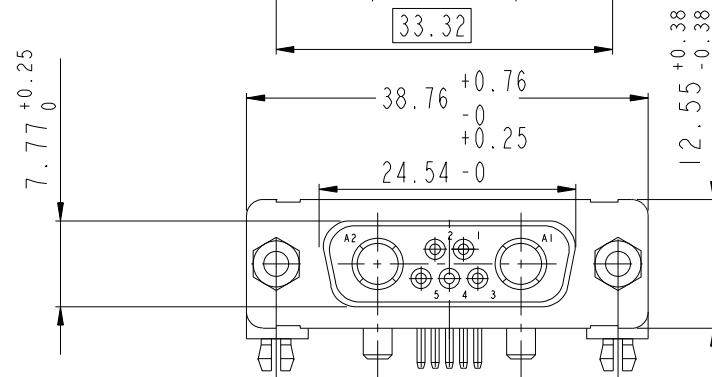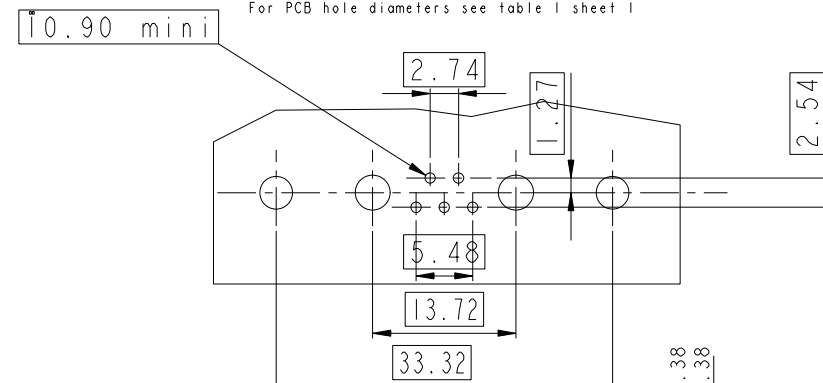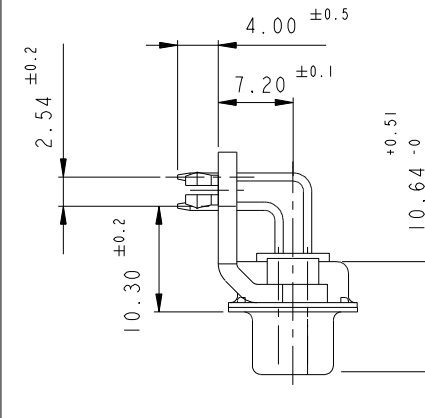
SIDE VIEW FOR ALL LAYOUTS
(except size D)VIEW WITHOUT POWERS
CONTACTSVIEW WITH POWERS
CONTACTS

Copyright FCI.

www.fciconnect.com			surface	✓	tolerance std	projection	mm	
			ISO 1302		ISO 406	ISO 1101		
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	M PESSON	2005-10-11	ANGULAR		0.X	±0.3	size	Scale
Eng	P LEGARE	2005-10-11		LINEAR	0.XX	±0.1	A2	2:1
Chr			0°	±2°	0.XXX	±0.05	ECN	F10-0060
Appr			Product family			-	Spec ref	
FCI			SUB FEMALE DMW EUROPE			dwg no		Rev.
			mixed power right angled solder			C01-8639-2300		E
			catalog no			CUSTOMER		sheet 4 of 7


13W3

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

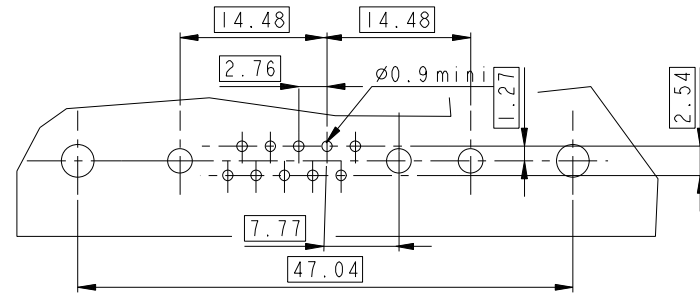











9W4

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

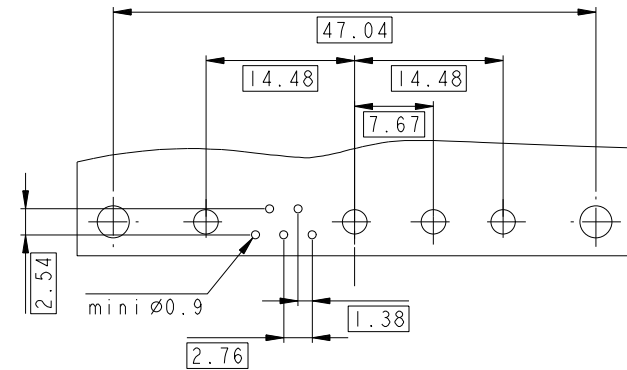

17W2

LAYOUT AND CONNECTOR DIMENSIONS
For PCB hole diameters see table I sheet I

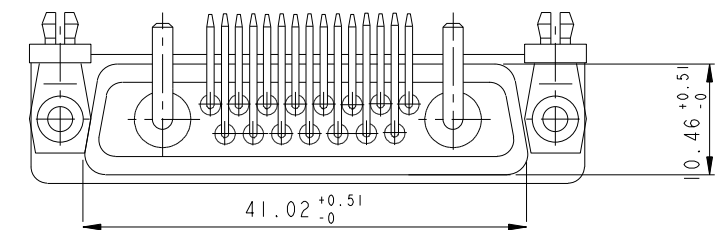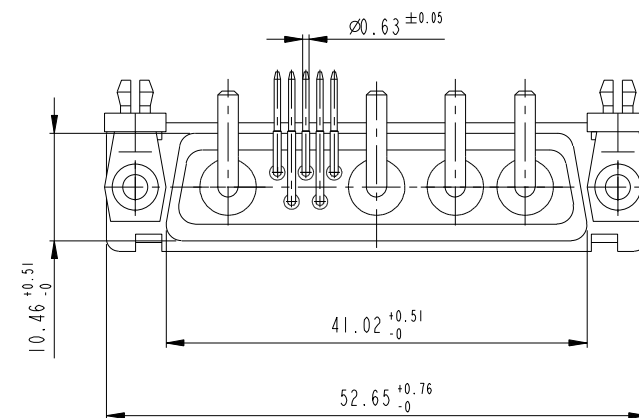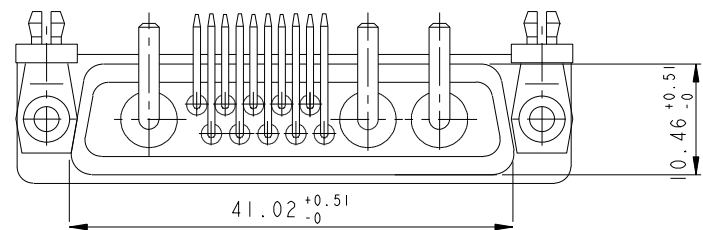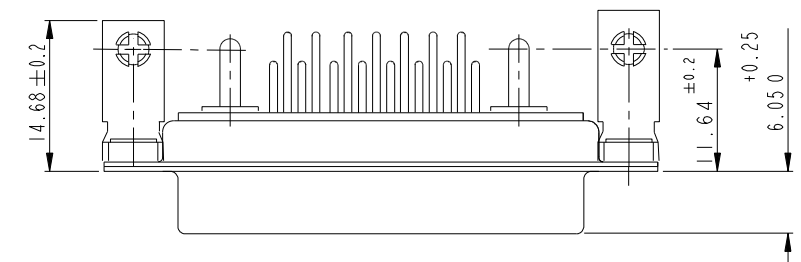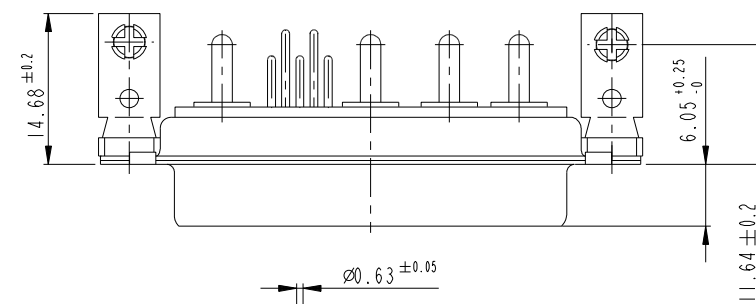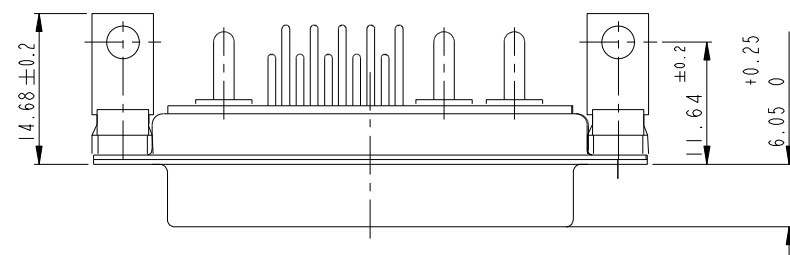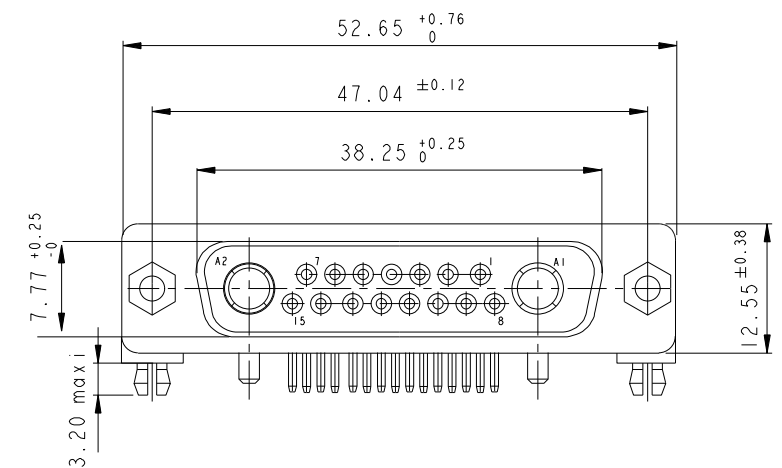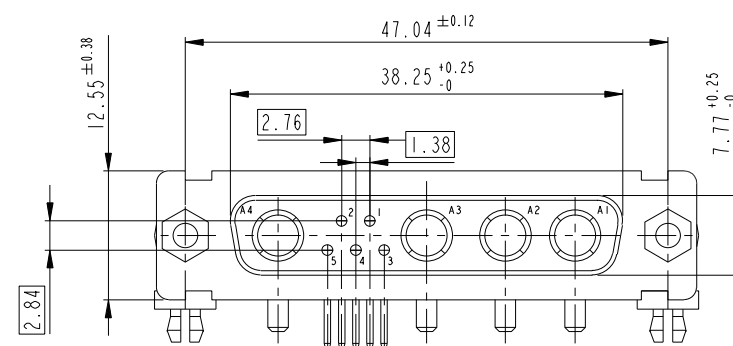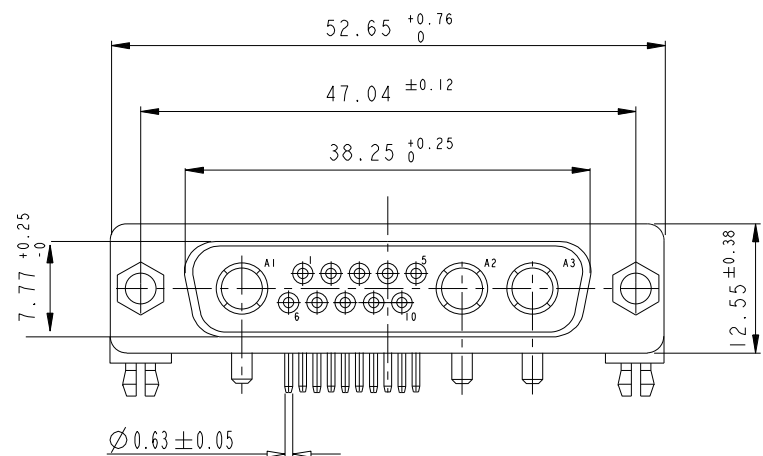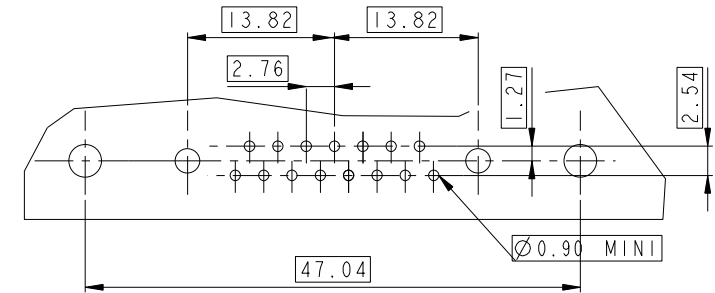

Floating signal contacts

www.fciconnect.com			surface  ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1		
Eng	P LEGARE	2005-10-11			0.XX	±0.1		ECN F10-0060		
Chr					0.XXX	±0.05				
Appr			Product family				-	Spec ref		
			title SUB FEMALE DMW EUROPE mixed power right angled solder			dwg no C01-8639-2300			Rev. E	
			catalog no			-	CUSTOMER		sheet 5 of 7	



Copyright FCI.

REV E - 2006-03-28

1

2

3

4

5

6



7

8

21W1

LAYOUT AND CONNECTOR DIMENSIONS



For PCB hole diameters see table I sheet I

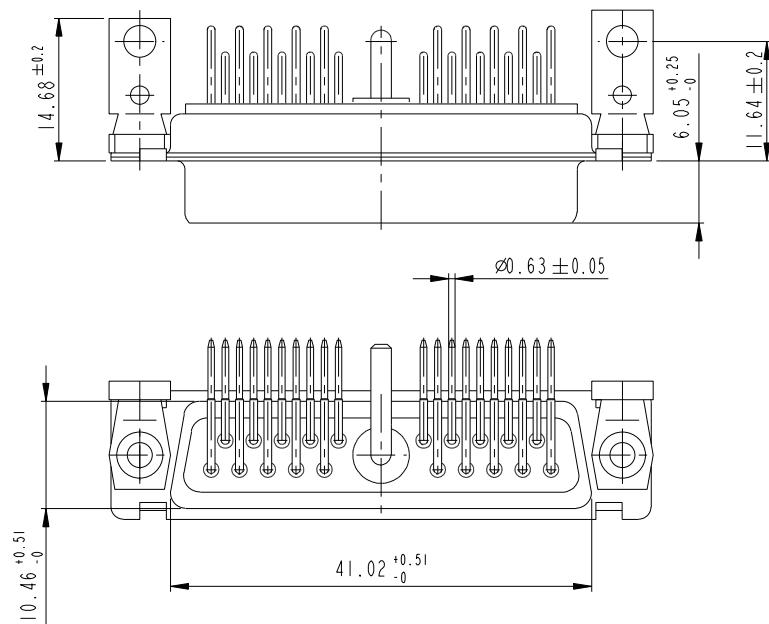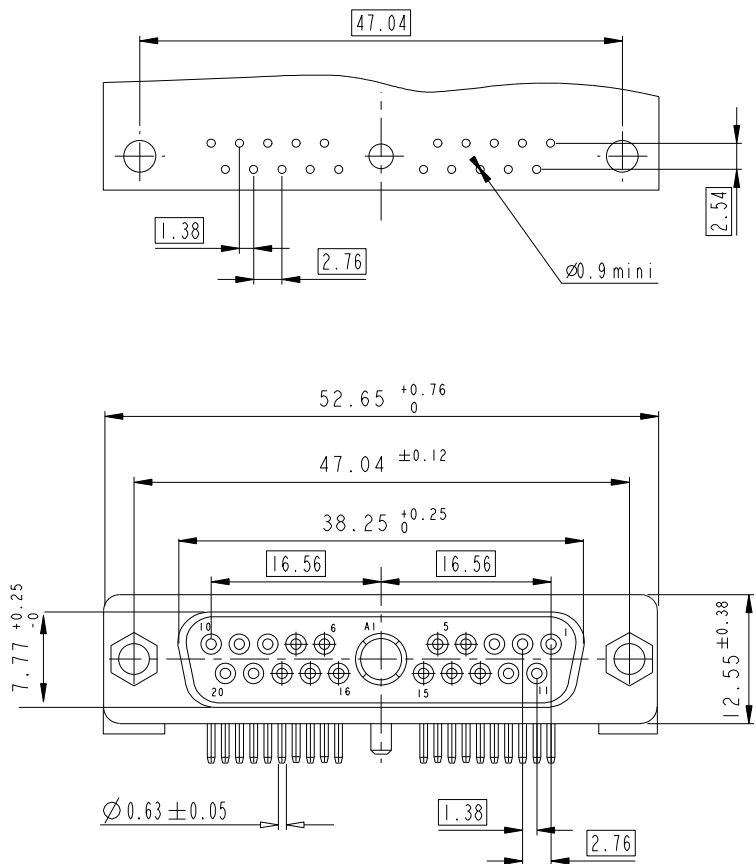

27W2

LAYOUT AND CONNECTOR DIMENSIONS

For PCB hole diameters see table I sheet I

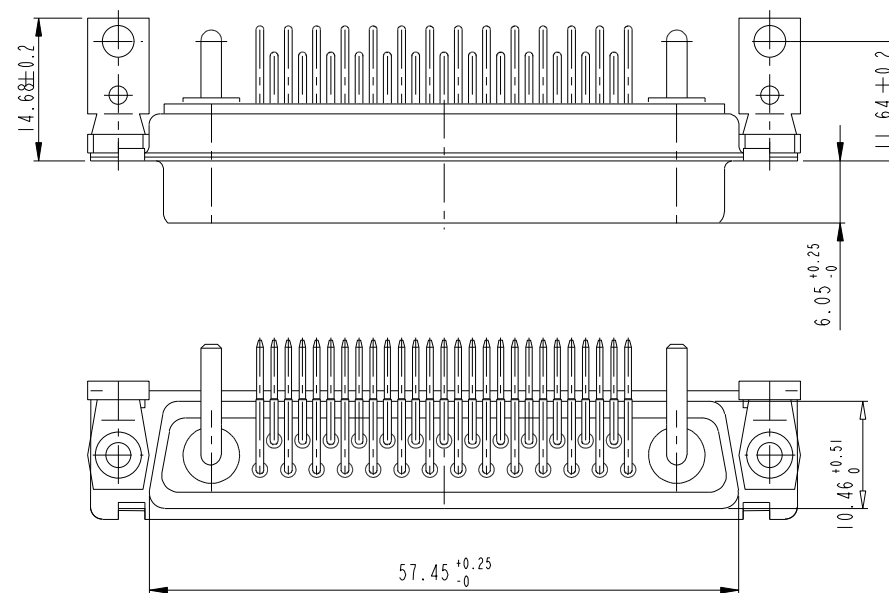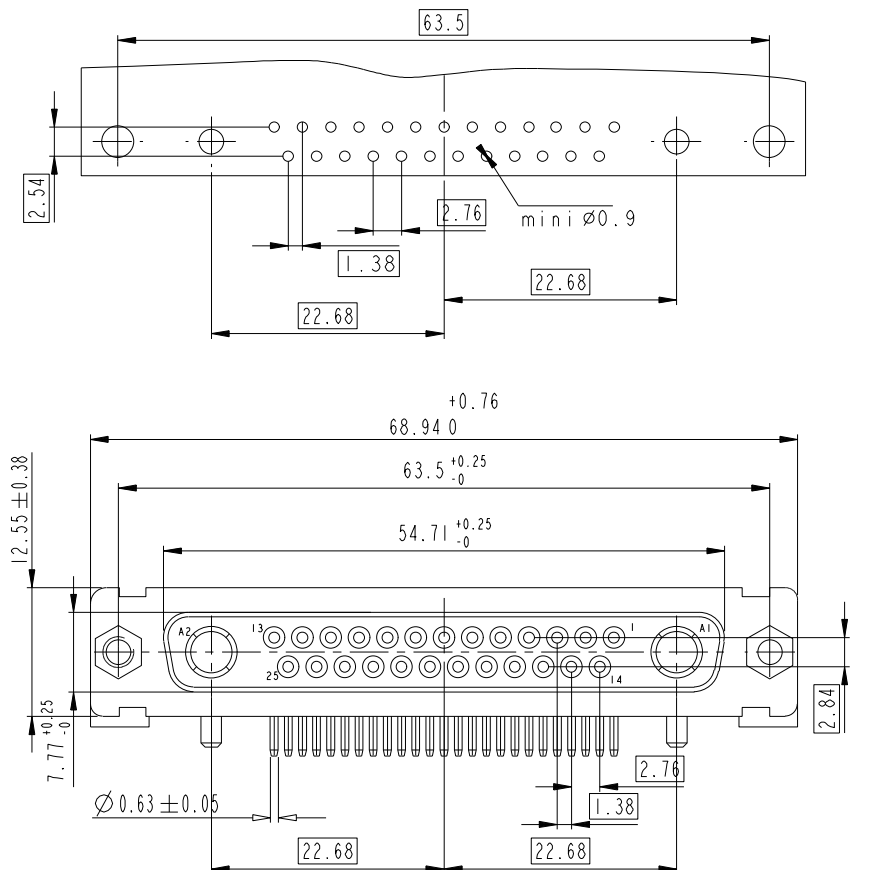

Copyright FCI.

REV E - 2006-03-28

2

3

4

5

6


8

www.fciconnect.com		surface	-	tolerance std	ISO 1302	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	M PESSON	2005-10-11	ANGULAR	0.X	± 0.3	size	A2	Scale	2:1
Eng	P LEGARE	2005-10-11	LINEAR	0.XX	± 0.1	ECN	F10-0060	Rev.	E
Chr			0° $\pm 2^\circ$	0.XXX	± 0.05	Product family	-	Spec ref	
Appr									
FCI		SUB FEMALE DMW EUROPE				dwg no	C01-8639-2300		
		mixed power right angled solder				catalog no	-	CUSTOMER	sheet 6 of 7

21W A4

LAYOUT AND CONNECTOR DIMENSIONS


For PCB hole diameters see table 1 sheet 1

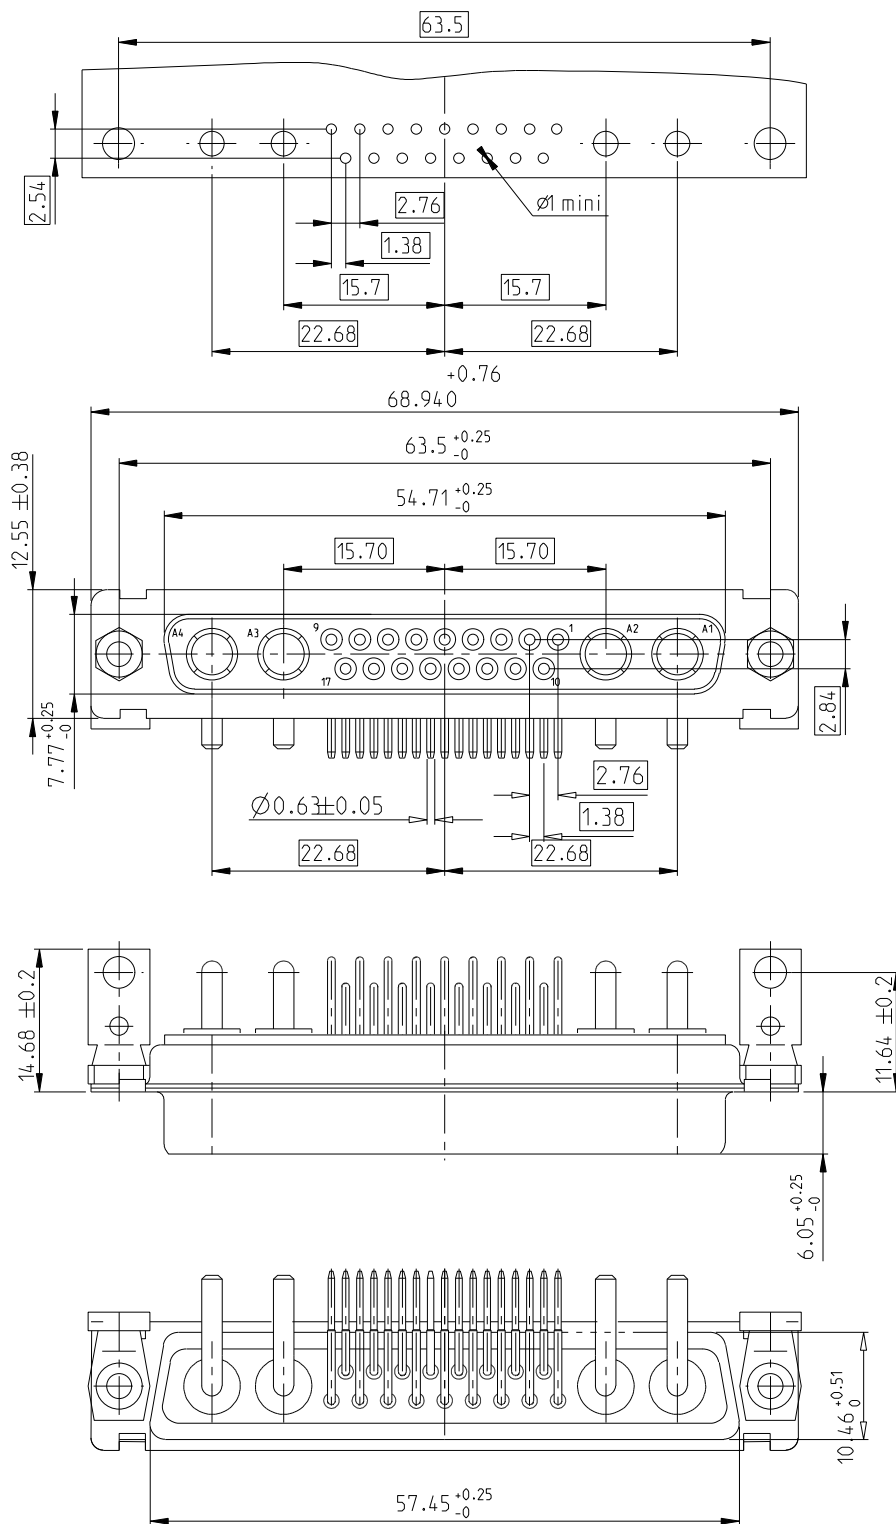

25W 3

LAYOUT AND CONNECTOR DIMENSIONS


For PCB hole diameters see table 1 sheet 1

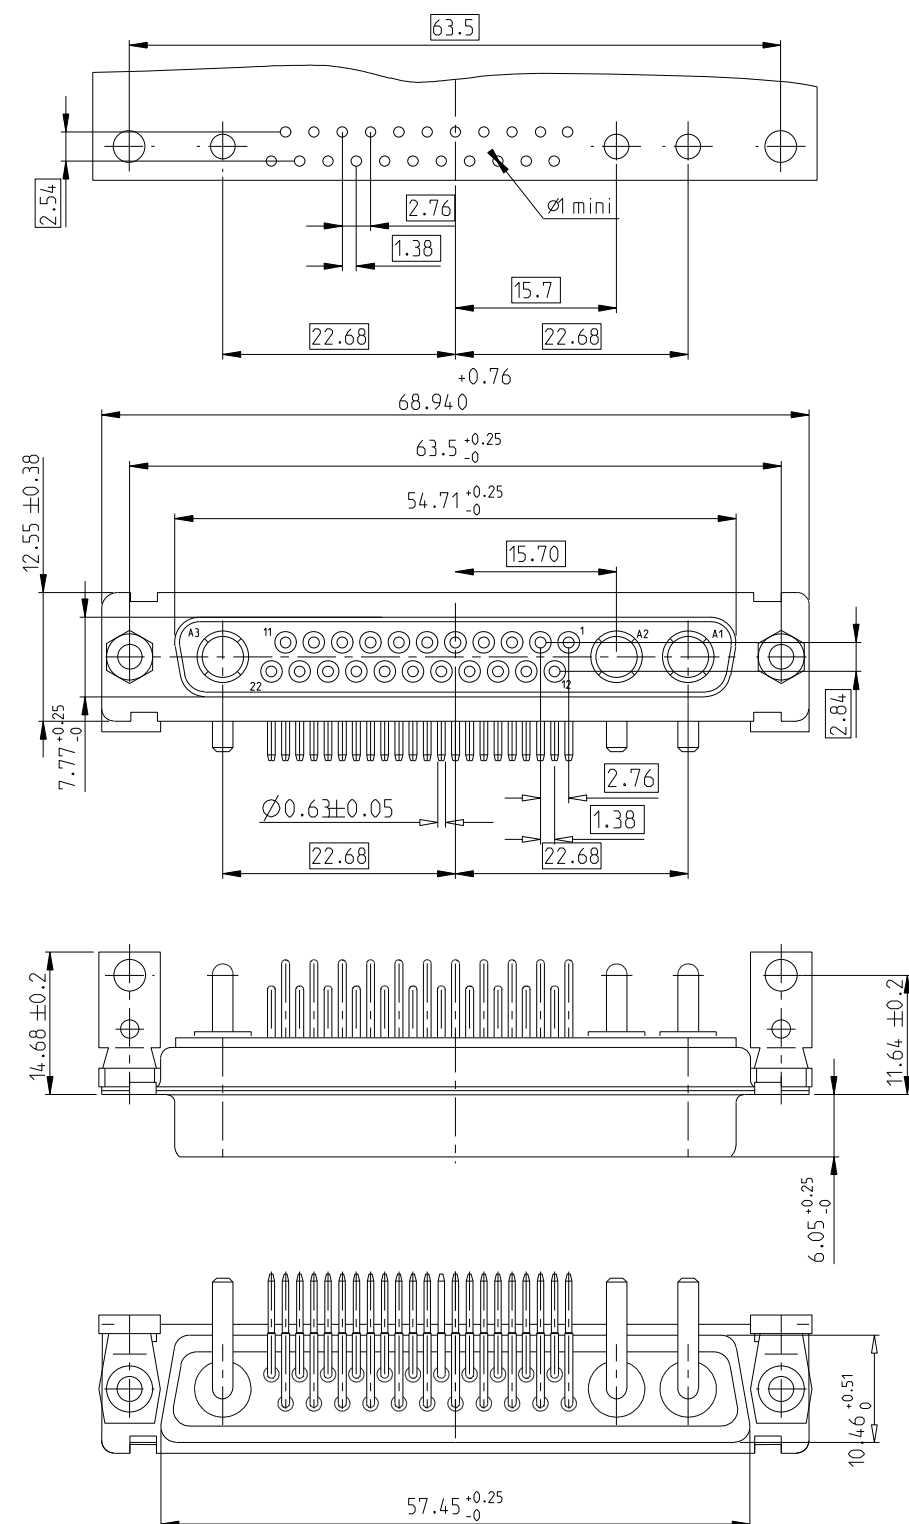

24W 7

LAYOUT AND CONNECTOR DIMENSIONS

For PCB hole diameters see table 1 sheet 1

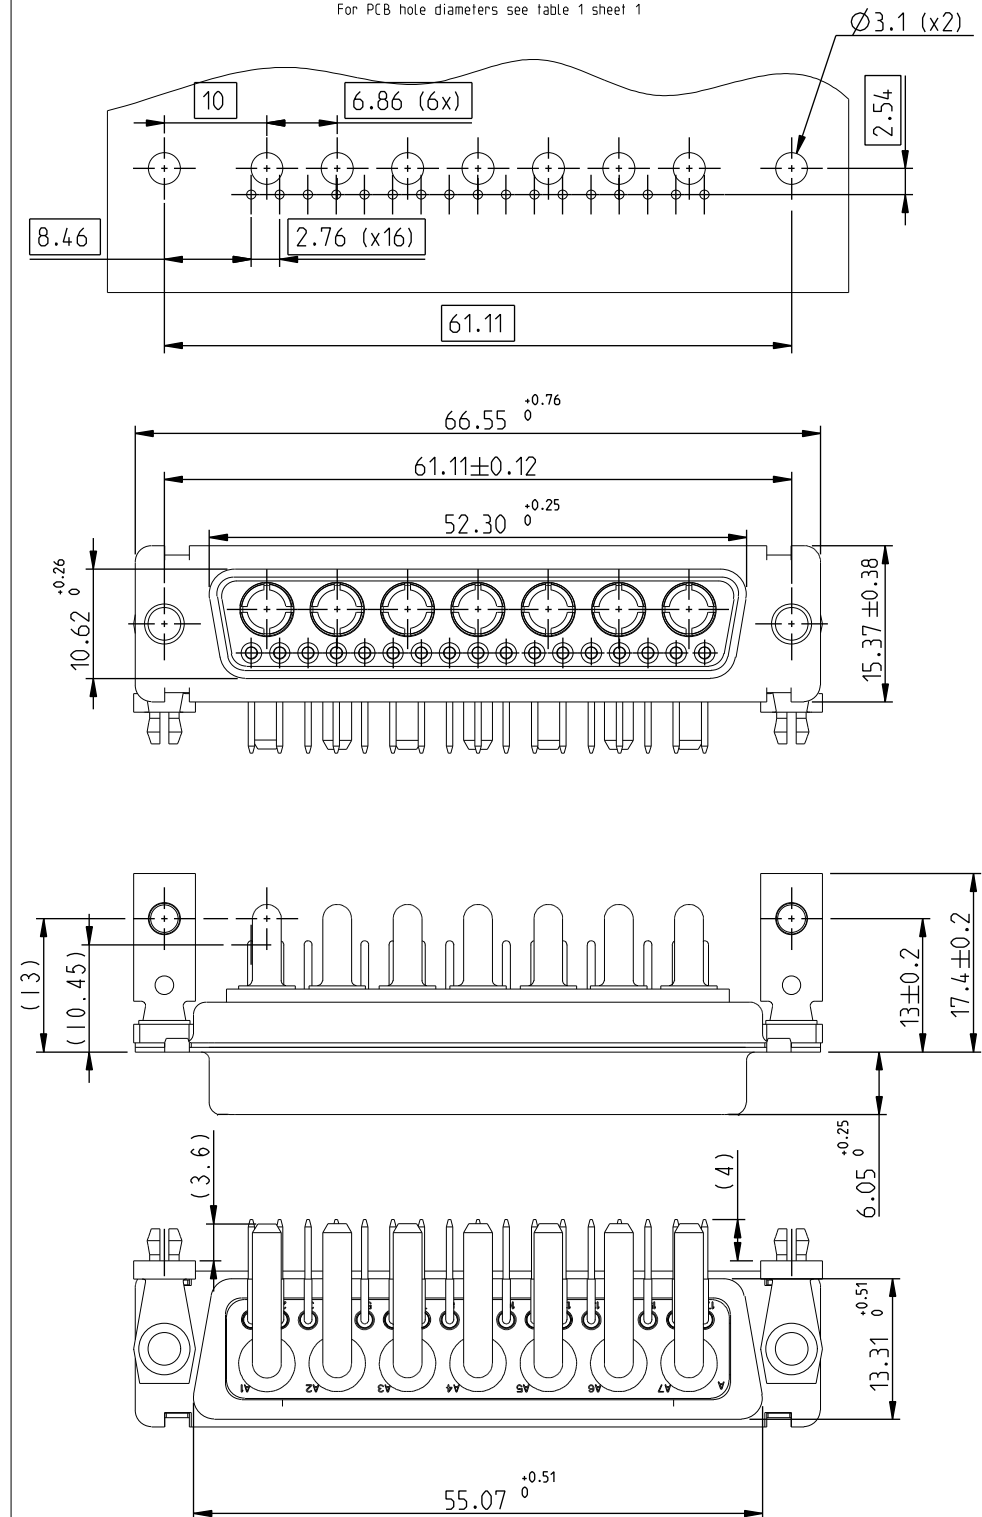

www.fciconnect.com			surface ISO 1302		- ✓ tolerance std ISO 406 ISO 1101		projection 		mm 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size	A2			
Eng	P LEGARE	2005-10-11			0.XX	±0.1	Scale			2:1	
Chr					0° ±2°	0.XXX	±0.05	ECN		F10-0060	
Appr			Product family			-		Spec ref			
		title SUB FEMALE DMW EUROPE				dwg no		C01-8639-2300		Rev.	
		mixed power right angled solder								E	
		catalog no				-		CUSTOMER		sheet 7 of 7	