74HC1G126; 74HCT1G126

Bus buffer/line driver; 3-state

Rev. 04 — 20 July 2007

Product data sheet

1. General description

The 74HC1G126 and 74HCT1G126 are high-speed, Si-gate CMOS devices. They provide one non-inverting buffer/line driver with 3-state output. The 3-state output is controlled by the output enable input pin (OE). A LOW at pin OE causes the output as assume a high-impedance OFF-state.

The HC device has CMOS input switching levels and supply voltage range 2 V to 6 V.

The HCT device has TTL input switching levels and supply voltage range 4.5 V to 5.5 V.

The bus driver output currents are equal to those of the 74HC126 and 74HCT126.

2. Features

- Symmetrical output impedance
- High noise immunity
- Low power dissipation
- Balanced propagation delays
- SOT353-1 and SOT753 package options

3. Ordering information

Table 1. Ordering information

Type number	Package							
	Temperature range	Name	Description	Version				
74HC1G126GW	–40 °C to +125 °C	TSSOP5	plastic thin shrink small outline package; 5 leads;	SOT353-1				
74HCT1G126GW			body width 1.25 mm					
74HC1G126GV	–40 °C to +125 °C	SC-74A	plastic surface-mounted package; 5 leads	SOT753				
74HCT1G126GV								


4. Marking

Table 2. Marking codes

Type number	Marking
74HC1G126GW	HN
74HCT1G126GW	TN
74HC1G126GV	H26
74HCT1G126GV	T26




5. Functional diagram

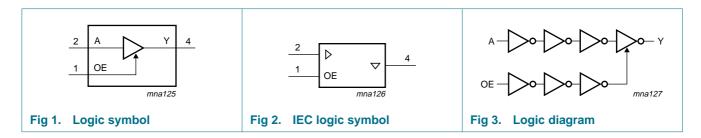

6. Pinning information

6.1 Pinning

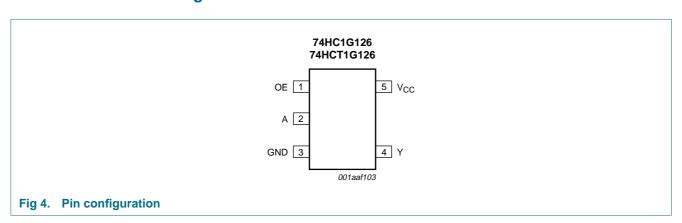

6.2 Pin description

Table 3. Pin description

Symbol	Pin	Description
OE	1	output enable input
A	2	data input
GND	3	ground (0 V)
Υ	4	data output
V _{CC}	5	supply voltage

7. Functional description

Table 4. Function table

 $H = HIGH \text{ voltage level}; L = LOW \text{ voltage level}; X = don't \text{ care}; Z = high-impedance OFF-state}$

Inputs		Output
OE	A	Υ
Н	L	L
Н	Н	Н
L	X	Z

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V). [1]

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage		-0.5	+7.0	V
I _{IK}	input clamping current	$V_I < -0.5 \text{ V or } V_I > V_{CC} + 0.5 \text{ V}$	-	±20	mA
I _{OK}	output clamping current	V_{O} < -0.5 V or V_{O} > V_{CC} + 0.5 V	-	±20	mA
I _O	output current	$-0.5 \text{ V} < \text{V}_{\text{O}} < \text{V}_{\text{CC}} + 0.5 \text{ V}$	-	±35.0	mA
I_{CC}	supply current		-	70	mA
I_{GND}	ground current		-70	-	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 ^{\circ}\text{C}$ to +125 $^{\circ}\text{C}$	[2] -	200	mW

^[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

9. Recommended operating conditions

Table 6. Recommended operating conditions

Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	74HC1G126			74HCT1G126			Unit
			Min	Тур	Max	Min	Тур	Max	
V_{CC}	supply voltage		2.0	5.0	6.0	4.5	5.0	5.5	V
V_{I}	input voltage		0	-	V_{CC}	0	-	V_{CC}	V
Vo	output voltage		0	-	V_{CC}	0	-	V_{CC}	V
T _{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise	$V_{CC} = 2.0 \text{ V}$	-	-	625	-	-	-	ns/V
	and fall rate	V _{CC} = 4.5 V	-	-	139	-	-	139	ns/V
		$V_{CC} = 6.0 \text{ V}$	-	-	83	-	-	-	ns/V

10. Static characteristics

Table 7. Static characteristics

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

Symbol Parameter		Conditions	-40 ¹	–40 °C to +85 °C			–40 °C to +125 °C		
			Min	Тур	Max	Min	Max		
For type 7	74HC1G126								
V_{IH}	HIGH-level input	$V_{CC} = 2.0 \text{ V}$	1.5	1.2	-	1.5	-	V	
	voltage	$V_{CC} = 4.5 \text{ V}$	3.15	2.4	-	3.15	-	V	
		$V_{CC} = 6.0 \text{ V}$	4.2	3.2	-	4.2	-	V	
V_{IL}	LOW-level input	$V_{CC} = 2.0 \text{ V}$	-	0.8	0.5	-	0.5	V	
voltage	voltage	$V_{CC} = 4.5 \text{ V}$	-	2.1	1.35	-	1.35	V	
		$V_{CC} = 6.0 \text{ V}$	-	2.8	1.8	-	1.8	V	

^[2] Above 55 $^{\circ}$ C the value of P_{tot} derates linearly with 2.5 mW/K.

 Table 7.
 Static characteristics ... continued

Voltages are referenced to GND (ground = 0 V). All typical values are measured at T_{amb} = 25 °C.

Symbol	Parameter	Conditions	-40	–40 °C to +85 °C			–40 °C to +125 °C	
			Min	Тур	Max	Min	Max	
V_{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL}		1			'	
	voltage	$I_{O} = -20 \mu A; V_{CC} = 2.0 V$	1.9	2.0	-	1.9	-	V
		$I_O = -20 \mu A; V_{CC} = 4.5 V$	4.4	4.5	-	4.4	-	V
		$I_O = -20 \mu A; V_{CC} = 6.0 V$	5.9	6.0	-	5.9	-	V
		$I_{O} = -6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	3.84	4.32	-	3.7	-	V
		$I_{O} = -7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$	5.34	5.81	-	5.2	-	V
V_{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL}						
	voltage	$I_O = 20 \mu A; V_{CC} = 2.0 V$	-	0	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 4.5 V$	-	0	0.1	-	0.1	V
		$I_O = 20 \mu A; V_{CC} = 6.0 \text{ V}$	-	0	0.1	-	0.1	V
		$I_O = 6.0 \text{ mA}; V_{CC} = 4.5 \text{ V}$	-	0.15	0.33	-	0.4	V
		$I_O = 7.8 \text{ mA}; V_{CC} = 6.0 \text{ V}$	-	0.16	0.33	-	0.4	V
I _I	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	1.0	-	1.0	μΑ
l _{OZ}	OFF-state output current	$V_I = V_{IH}$ or V_{IL} ; $V_O = V_{CC}$ or GND; $V_{CC} = 6.0 \text{ V}$	-	-	5	-	10	μΑ
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 6.0 \text{ V}$	-	-	10	-	20	μΑ
C _I	input capacitance		-	1.5	-	-	-	pF
For type 7	74HCT1G126							
V _{IH}	HIGH-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	2.0	1.6	-	2.0	-	V
V_{IL}	LOW-level input voltage	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	-	1.2	0.8	-	0.8	V
V _{OH}	HIGH-level output	$V_I = V_{IH}$ or V_{IL} ; $V_{CC} = 4.5 \text{ V}$						
	voltage	$I_{O} = -20 \mu A$	4.4	4.5	-	4.4	-	V
		$I_{O} = -6.0 \text{ mA}$	3.84	4.32	-	3.7	-	V
V_{OL}	LOW-level output	$V_I = V_{IH}$ or V_{IL} ; $V_{CC} = 4.5 \text{ V}$						
	voltage	$I_O = 20 \mu A$	-	0	0.1	-	0.1	V
		$I_{O} = 6.0 \text{ mA}$	-	0.16	0.33	-	0.4	V
II	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	1.0	-	1.0	μΑ
l _{OZ}	OFF-state output current	$V_I = V_{IH}$ or V_{IL} ; $V_O = V_{CC}$ or GND; $V_{CC} = 5.5 \text{ V}$	-	-	5	-	10	
I _{CC}	supply current	$V_I = V_{CC}$ or GND; $I_O = 0$ A; $V_{CC} = 5.5 \text{ V}$	-	-	10	-	20	μΑ
ΔI_{CC}	additional supply current	per input; $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V};$ $V_{I} = V_{CC} - 2.1 \text{ V};$ $I_{O} = 0 \text{ A}$	-	-	500	-	850	μΑ
C _I	input capacitance		-	1.5	-	-	-	pF

11. Dynamic characteristics

Table 8. Dynamic characteristics

 $GND = 0 \ V; \ t_r = t_f \le 6.0 \ ns; \ C_L = 50 \ pF$ unless otherwise specified. All typical values are measured at $T_{amb} = 25 \ ^{\circ}C$. For test circuit see Figure 7

Symbol Parameter		Conditions		-40	°C to +8	5 °C	-40 °C to +125 °C		Unit
				Min	Тур	Max	Min	Max	
For type	74HC1G126						'		
t _{pd}	propagation delay	A to Y; see Figure 5	<u>[1]</u>						
		V _{CC} = 2.0 V		-	24	125	-	150	ns
		$V_{CC} = 4.5 \text{ V}$		-	10	25	-	30	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	9	-	-	-	ns
		$V_{CC} = 6.0 \text{ V}$		-	9	21	-	26	ns
t_{en}	enable time	OE to Y; see Figure 6	<u>[1]</u>						
		$V_{CC} = 2.0 \text{ V}$		-	24	155	-	190	ns
		$V_{CC} = 4.5 \text{ V}$		-	10	31	-	38	ns
		$V_{CC} = 6.0 \text{ V}$		-	8	26	-	32	ns
t_{dis}	disable time	OE to Y; see Figure 6	<u>[1]</u>						
		$V_{CC} = 2.0 \text{ V}$		-	16	155	-	190	ns
		$V_{CC} = 4.5 \text{ V}$		-	12	31	-	38	ns
		$V_{CC} = 6.0 \text{ V}$		-	11	26	-	32	ns
C_{PD}	power dissipation capacitance	$V_I = GND$ to V_{CC}	[2]	-	30	-	-	-	pF
For type	74HCT1G126								
t _{pd}	propagation delay	A to Y; see Figure 5	[1]						
		V _{CC} = 4.5 V		-	11	30	-	36	ns
		$V_{CC} = 5.0 \text{ V}; C_L = 15 \text{ pF}$		-	10	-	-	-	ns
t _{en}	enable time	OE to Y; see Figure 6; $V_{CC} = 4.5 \text{ V}$	[1]	-	10	35	-	42	ns
t _{dis}	disable time	OE to Y; see Figure 6; $V_{CC} = 4.5 \text{ V}$	[1]	-	12	31	-	38	ns
C_{PD}	power dissipation capacitance	$V_I = GND$ to $V_{CC} - 1.5 V$	[2]	-	27	-	-	-	pF

[1] t_{pd} is the same as t_{PLH} and t_{PHL} .

 t_{en} is the same as t_{PZL} and t_{PZH} .

 t_{dis} is the same as t_{PLZ} and t_{PHZ} .

[2] C_{PD} is used to determine the dynamic power dissipation P_D (μW).

 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \sum (C_L \times V_{CC}^2 \times f_o)$ where:

 f_i = input frequency in MHz


fo = output frequency in MHz

C_L = output load capacitance in pF

V_{CC} = supply voltage in Volts

 $\sum (C_L \times V_{CC}^2 \times f_o) = \text{sum of outputs}$

12. Waveforms

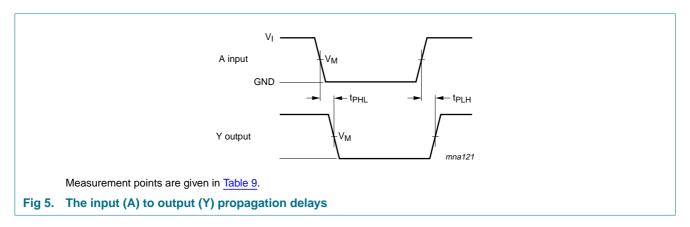


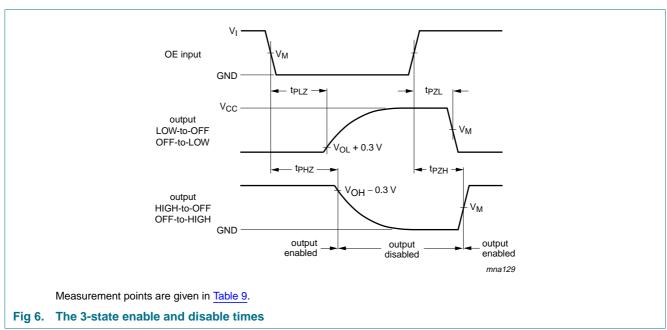


Table 9. Measurement points

Туре	Input	Output	
	V _M	VI	V _M
74HC1G126	$0.5 \times V_{CC}$	GND to V _{CC}	$0.5 \times V_{CC}$
74HCT1G126	1.3 V	GND to 3.0 V	1.3 V

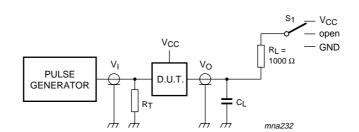

Test data is given in Table 8. Definitions for test circuit:

 R_T = Termination resistance should be equal to the output impedance Z_0 of the pulse generator

 C_L = Load capacitance including jig and probe capacitance

R_L = Load resistance

For t_{PLH} , t_{PHL} , $S_1 = open$

For t_{PLZ} , t_{PZL} , $S_1 = V_{CC}$


For t_{PHZ} , t_{PZH} , $S_1 = GND$

Fig 7. Load circuitry for switching times

13. Package outline

TSSOP5: plastic thin shrink small outline package; 5 leads; body width 1.25 mm

SOT353-1

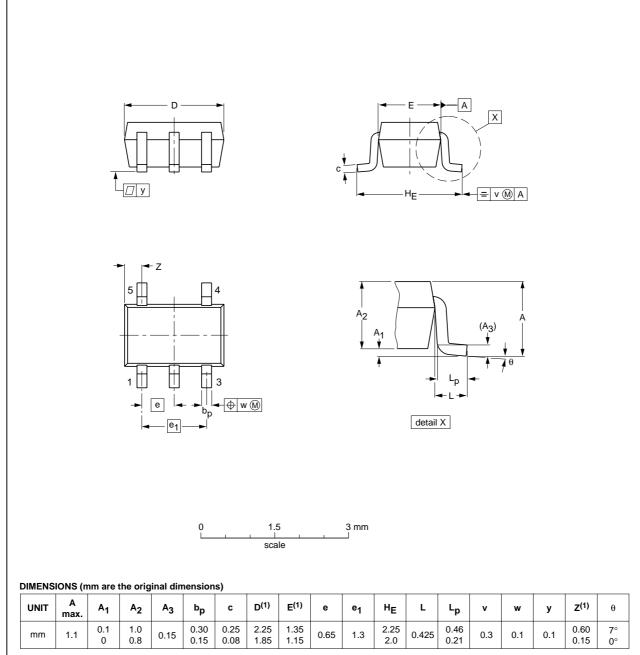

Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.

OUTLINE		REFERENCES			EUROPEAN ISSUE DA		
VERSION	IEC	JEDEC	JEITA		PROJECTION	ISSUE DATE	
SOT353-1		MO-203	SC-88A			-00-09-01 03-02-19	

Fig 8. Package outline SOT353-1 (TSSOP5)

Plastic surface-mounted package; 5 leads

SOT753

9 of 12

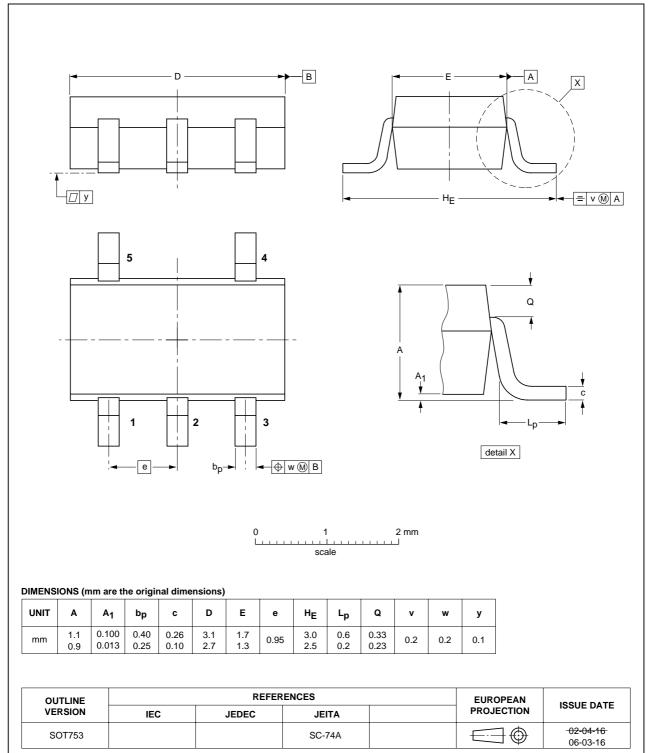


Fig 9. Package outline SOT753 (SC-74A)

Product data sheet

14. Abbreviations

Table 10. Abbreviations

Acronym	Description
DUT	Device Under Test
TTL	Transistor-Transistor Logic

15. Revision history

Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes	
74HC_HCT1G126_4	20070720	Product data sheet	-	74HC_HCT1G126_3	
Modifications:	 The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors. 				
	 Legal texts have been adapted to the new company name where appropriate. 				
	 Package SOT353 changed to SOT353-1 in <u>Table 1</u> and <u>Figure 8</u>. 				
	Quick Reference Data and Soldering sections removed.				
	 Section 2 "Features" updated. 				
74HC_HCT1G126_3	20020515	Product specification	-	74HC_HCT1G126_2	
74HC_HCT1G126_2	20010406	Product specification	-	74HC_HCT1G126	
74HC HCT1G126	19970924	Preliminary specification	-	_	

16. Legal information

16.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

16.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

16.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or

malfunction of a NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

17. Contact information

For additional information, please visit: http://www.nxp.com

For sales office addresses, send an email to: salesaddresses@nxp.com

74HC1G126; 74HCT1G126

Bus buffer/line driver; 3-state

18. Contents

1	General description
2	Features
3	Ordering information
4	Marking
5	Functional diagram
6	Pinning information
6.1 6.2	Pinning
7	Functional description
8	Limiting values
9	Recommended operating conditions
10	Static characteristics
11	Dynamic characteristics
12	Waveforms
13	Package outline
14	Abbreviations10
15	Revision history
16	Legal information
16.1	Data sheet status 1
16.2	Definitions
16.3	Disclaimers
16.4	Trademarks1
17	Contact information
18	Contents 11

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

74HC1G126GW-G 74HCT1G126GW-G 74HCT1G126GW-R