


■ DIMENSIONS AND PERMISSIBLE RIPPLE CURRENT

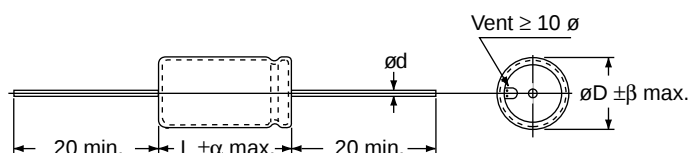

Lead Dimensions (mm)

ϕD	6.3	8	10	13	16	18
ϕd	0.6	0.6	0.6	0.8	0.8	0.8
β	1.5	1.5	1.5	2.0	2.0	2.0
α	0.5	0.5	0.5	1.0	1.0	1.0

Value (μF)	Working Voltage (WV); Dimensions: $\phi D \times L$ (mm); Ripple Current: mA/RMS @ 120Hz, 85°C															
	6.3		10		16		25		35		50		63		100	
	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
0.1											6.3 x 13	5	6.3 x 13	5	6.3 x 13	5
0.22											6.3 x 13	7	6.3 x 13	8	6.3 x 13	8
0.33											6.3 x 13	9	6.3 x 13	10	6.3 x 13	10
0.47											6.3 x 13	10	6.3 x 13	12	6.3 x 13	12
1											6.3 x 13	16	6.3 x 13	18	6.3 x 13	18
2.2											6.3 x 13	23	6.3 x 13	27	6.3 x 13	27
3.3											6.3 x 13	29	6.3 x 13	31	6.3 x 13	35
4.7											6.3 x 13	34	6.3 x 13	40	6.3 x 13	42
10									6.3 x 13	46	6.3 x 13	54	8 x 13	59	8 x 16	69
15											8 x 13	71				
22					6.3 x 13	61	6.3 x 13	69	6.3 x 13	74	8 x 13	89	8 x 16	97	10 x 21	120
33			6.3 x 13	71	6.3 x 13	80	8 x 13	85	8 x 16	101	10 x 16	109	10 x 17	139	10 x 21	153
47			6.3 x 13	85	8 x 13	95	8 x 13	113	8 x 16	120	10 x 17	152	10 x 21	174	13 x 22	203
100	6.3 x 16	118	8 x 13	147	8 x 16	155	10 x 17	192	10 x 21	205	10 x 21	232	13 x 22	269	16 x 27	317
220	8 x 16	195	8 x 16	254	10 x 17	268	10 x 21	298	13 x 22	338	10 x 27	381	16 x 27	447	16 x 37	501
330	8 x 16	239	10 x 17	312	10 x 21	344	13 x 22	387	13 x 27	433	16 x 27	500	16 x 33	567		
470	10 x 17	333	10 x 21	389	13 x 22	436	13 x 27	483	16 x 27	552	16 x 33	618	18 x 42	792		
1000	13 x 21	508	13 x 22	603	13 x 27	664	16 x 27	781	16 x 37	857	18 x 42	1054				
2200	13 x 27	836	16 x 28	1000	16 x 37	1121	18 x 42	1355								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Xicon:

[140-NPAL100V10](#) [140-NPAL50V4.7](#) [140-NPAL50V5.6](#) [140-NPAL100V220](#) [140-NPAL100V100](#) [140-NPAL50V33](#)
[140-NPAL50V10](#) [140-NPAL50V22](#) [140-NPAL50V68](#) [140-NPAL100V33](#) [140-NPAL50V3.3](#) [140-NPAL100V47](#) [140-](#)
[NPAL100V68](#) [140-NPAL100V22](#) [140-NPAL50V2.2](#) [140-NPAL50V6.8](#) [140-NPAL50V1.0](#) [140-NPAL50V200](#)