

FED.MFG.CODE 91929

SWITCH - BASIC

X113913-BZ

BZ-RX-D584

REPLACES

204010

RELEASE NO

1

CHECK

REVISIONS

A 204286

31 OCT 01

B	204335
---	--------

CSL

6 NOV 01

Y
O
E
H
O

25 SEP 01

SAV


CHECK

EP 01

1	25
---	----

RASTER


DRAWN

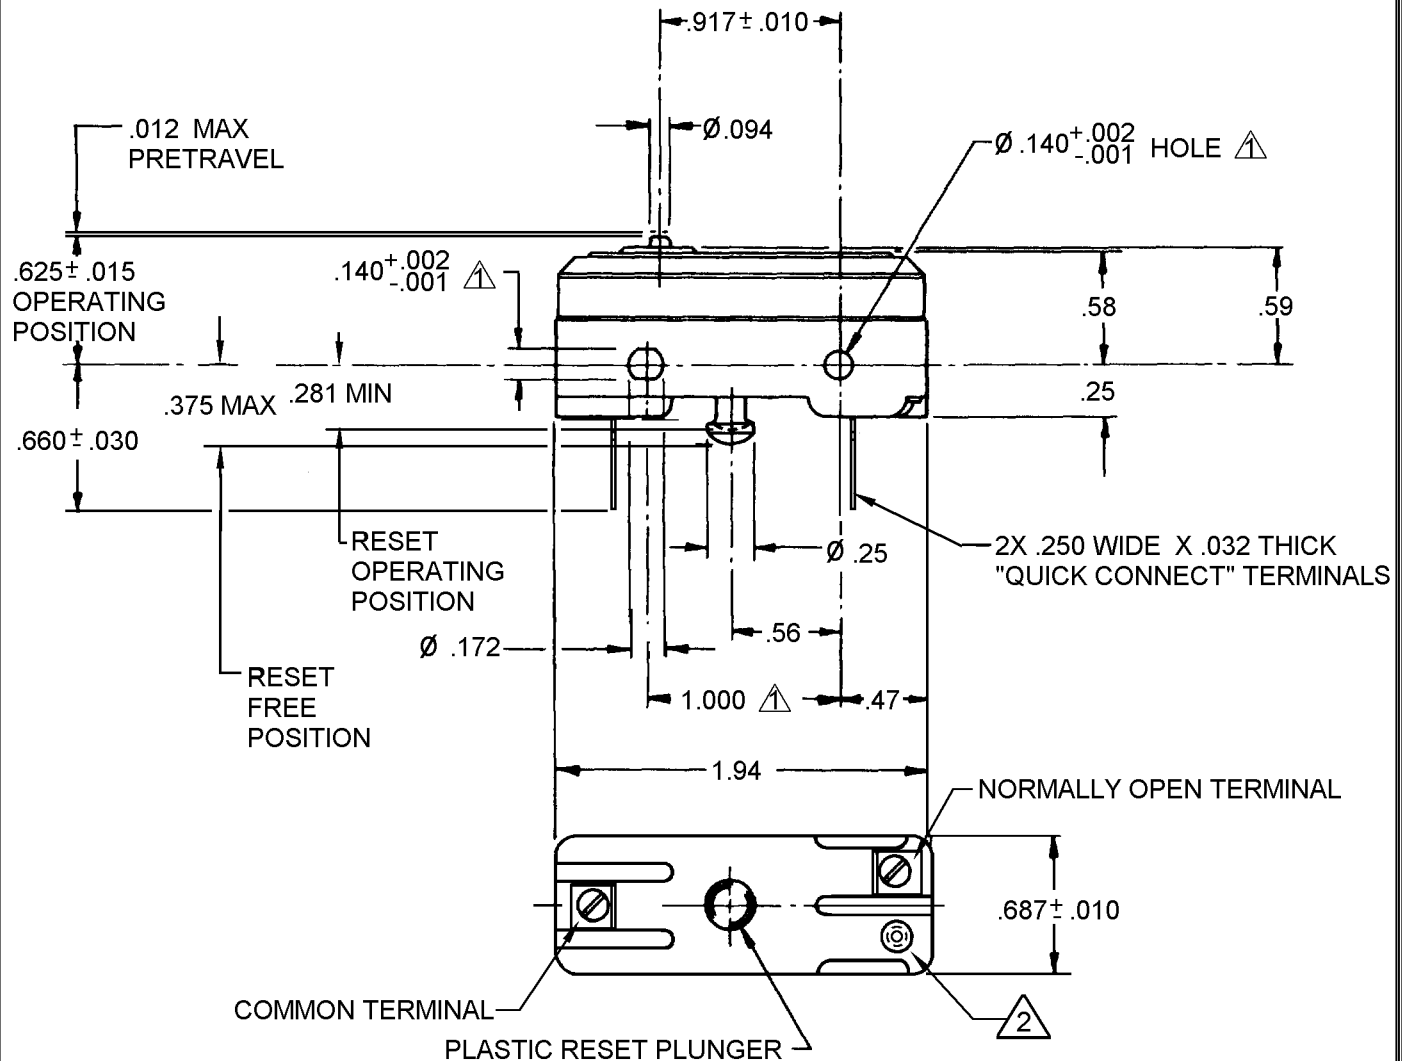

① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF
Ø .139 MAX ON 1.000± .002 CENTERS

② NORMALLY CLOSED CIRCUIT LOCATION ELECTRICALLY LIVE

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE-----7-9 OZ OVERTRAVEL-----:005 MIN	CONTACT ARRANGEMENT S.P.D.T.	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RESET CHARACTERISTICS OPERATING FORCE-----2-10 OZ OVERTRAVEL-----:015 MIN	L67 15A 125, <u>250</u> OR 480 VAC 1/4HP 125 VAC, 1/2HP <u>250</u> VAC 1/2A 125 VDC, 1/4A 250 VDC FIG. 67 	ONE PLACE (.0)	±.030
		TWO PLACE (.00)	±.015
		THREE PLACE (.000)	±.005
		ANGLES	±
		WEIGHT .055 LB	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[BZ-RX-D584](#)