

REVISIONS

A	0035411
JA	23NOV07

CHECK	
-------	--

23NOV07	
---------	--

ASD	
-----	--

CHECK	
-------	--

JJA	27FEB97
-----	---------

RASTER

X100839-BM

REPLACES

PR-22603

CHECK

CHECK

23NOV07

ASD

CHECK

JJA 27FEB97


MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING


BM-1R-P5

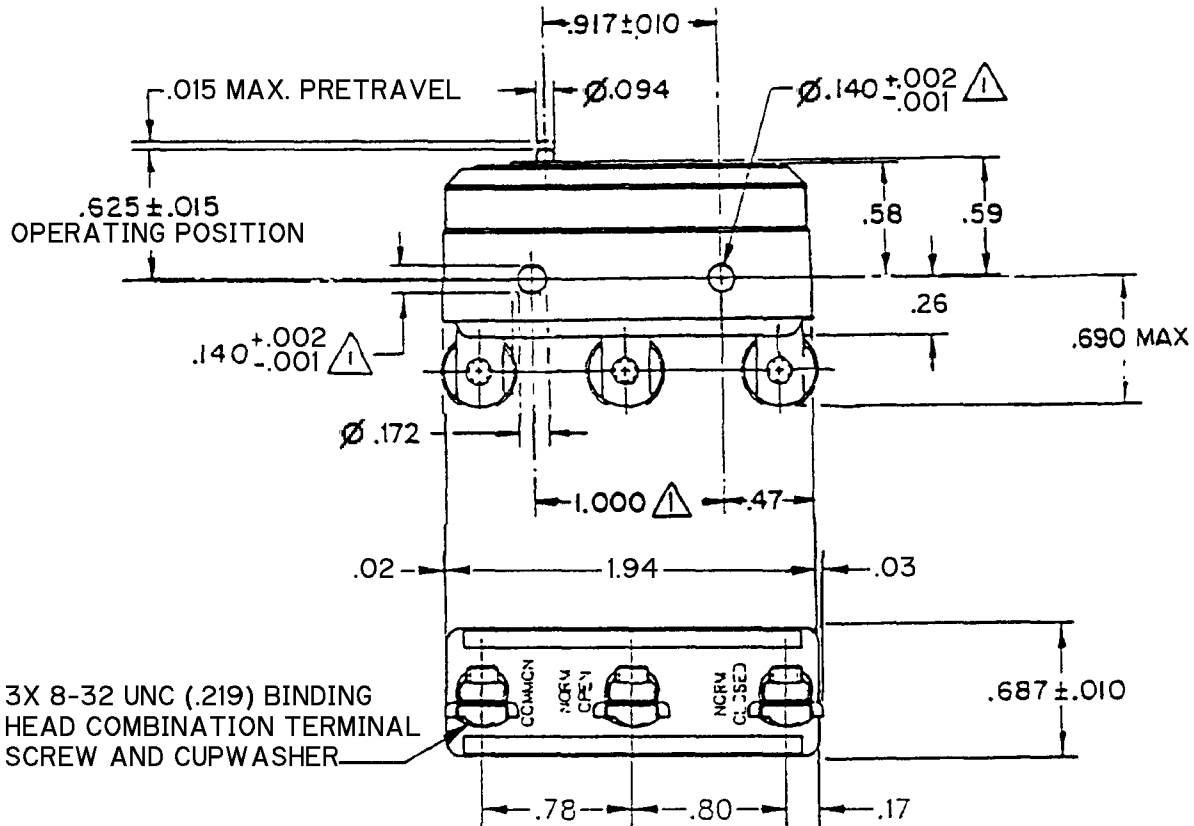

NOTE
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF Ø.139 MAX ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE ----- 7 - 10.5 OZ
 RELEASE FORCE----- 4 OZ MIN
 DIFFERENTIAL TRAVEL----- .0003-.0010
 OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

L161 22A 125, 250 OR 480 VAC
 1/2HP 125 VAC, 1HP 250 VAC

L288
 L315
 L318 22A 250V ~ T85 5E4



SCALE FULL

DO NOT
 SCALE PRINT

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE

ONE PLACE (.0) ±.030
 TWO PLACE (.00) ±.015
 THREE PLACE (.000) ±.005
 ANGLES ±

WEIGHT .060 LB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[BM-1R-P5](#)