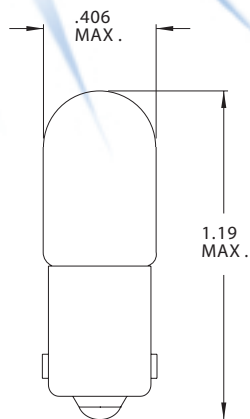


**T-3 1/4 Miniature Bayonet Base**


| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM49        | 2.00           | .06  | .04  | 1,000      | S-2           |
| CM1809      | 2.00           | .06  | .02  | 1,000      | C-6           |
| CM43        | 2.50           | .50  | .50  | 3,000      | C-2R          |
| CM45        | 3.20           | .35  | .50  | 3,000      | C-2R          |
| CM1490      | 3.20           | .16  | .20  | 3,000      | C-2R          |
| CM1688      | 3.75           | .09  | .18  | 1,000      | C-2R          |
| CM1804      | 4.00           | .06  | .07  | 1,000      | S-2           |
| CM1867      | 4.00           | .06  | .06  | 2,000      | C-6           |
| CM1850      | 5.00           | .09  | .25  | 1,500      | C-2R          |
| CM1851      | 5.00           | .12  | .40  | 40         | C-2R          |
| CM1906      | 5.00           | .07  | .19  | 1,000      | C-6           |
| CM316       | 6.00           | .70  | 3.40 | 500        | C-2R          |
| CM1689      | 6.00           | .14  | .35  | 2,000      | C-2V          |
| CM44        | 6.30           | .25  | .90  | 3,000      | C-2R          |
| CM47        | 6.30           | .15  | .50  | 3,000      | C-2R          |
| CM238       | 6.30           | .50  | 2.00 | 2,000      | C-2R          |
| CM239       | 6.30           | .36  | .67  | 5,000      | C-2R          |
| CM240       | 6.30           | .36  | .67  | 5,000      | C-2R          |
| CM267       | 6.30           | .15  | .33  | 5,000      | C-2R          |
| CM755       | 6.30           | .15  | .33  | 20,000     | C-2R          |
| CM1302      | 6.30           | .04  | .08  | 5,000      | C-6           |
| CM1810      | 6.30           | .40  | 1.40 | 3,000      | C-2R          |
| CM1847      | 6.30           | .15  | .38  | 5,000      | C-2R          |
| CM1866      | 6.30           | .25  | .65  | 5,000      | C-2R          |
| CM1888      | 7.00           | .50  | 2.00 | 1,500      | C-2R          |
| CM1908      | 7.00           | .19  | .30  | 2,000      | C-2R          |
| CM1816      | 13.0           | .33  | 3.00 | 1,000      | C-2V          |
| CM181       | 14.0           | .41  | 3.00 | 1,500      | C-2F          |
| CM756       | 14.0           | .08  | .31  | 15,000     | C-2F          |
| CM1488      | 14.0           | .15  | 1.50 | 200        | C-2V          |
| CM1815      | 14.0           | .20  | 1.40 | 3,000      | C-2V          |
| CM1889      | 14.0           | .27  | 2.00 | 1,500      | C-2F          |
| CM1891      | 14.0           | .24  | 2.00 | 500        | C-2F          |
| CM1893      | 14.0           | .33  | 2.00 | 7,500      | C-2F          |
| CM1894      | 14.0           | .24  | 2.00 | 500        | C-2V          |
| CM1898      | 14.0           | .24  | 2.00 | 7,500      | 2C-2R         |
| CM216       | 14.4           | .24  | 1.00 | 3,000      | C-2F          |
| CM1813      | 14.4           | .10  | .86  | 1,000      | C-2V          |
| CM1892      | 14.4           | .12  | .75  | 1,000      | C-2F          |
| CM1909      | 14.4           | .10  | .86  | 1,000      | C-2V          |
| CM1881      | 15.5           | .24  | 2.20 | 500        | C-2F          |