




FEED-THROUGH FLAT BASE
EUROSTRIPS
Panel Mount

For wire-to-wire connections in HVAC, appliance, equipment, power distribution and other industrial applications with strict budget and space requirements. Easy to use double row terminal strips are a cost-effective alternative to barrier strips or other types of terminal blocks. Simply strip the wire, insert and tighten the screw. Eurostrips feature tubular screw clamps, with wire protectors, and recessed metal parts for finger protection. The stainless steel wire protectors exhibit excellent memory and the wire stop insures the most effective connection.

Eurostrips described on this and the following page are available with a flat base for minimum clearance applications. They can be panel mounted or left to free float. Offered in easy to cut standard 12 pole strips, they can also be ordered precut with the required number of poles.


- Tubular screw clamp
- Panel mount or free float
- Housing material: polyamide 6.6
- Color: opaque white
- Marking plates or factory imprinted application

	HE1		HE4	
				
	Flat base with wire protector		Flat base with wire protector	
Pole Spacing	8 mm		10 mm	
Mounting Hole Diameter	3 mm		3.6 mm	
Stripping Length	5 mm		6 mm	
Approvals				
Wire Range	1-2.5 mm ² 24-12 AWG		2.5-4 mm ² 24-10 AW	
Voltage Rating	400 V 300 V		400V 300	
Current Rating	6 A 20 A		10 A 30 A	
Torque	0.5 Nm 4.4 lb-in		0.8 Nm 7.0 lb	
No. of Poles	Cat. No.	Std. Pk.	Cat. No.	Std. P
2	HE1WPR/02	100	HE4WPR/02	100
3	HE1WPR/03	100	HE4WPR/03	100
4	HE1WPR/04	100	HE4WPR/04	100
5	HE1WPR/05	100	HE4WPR/05	100
6	HE1WPR/06	50	HE4WPR/06	50
7	HE1WPR/07	50	HE4WPR/07	50
8	HE1WPR/08	50	HE4WPR/08	50
9	HE1WPR/09	50	HE4WPR/09	50
10	HE1WPR/10	50	HE4WPR/10	50
11	HE1WPR/11	50	HE4WPR/11	50
12	HE1WPR/12	50	HE4WPR/12	50



Dimensions mm


A = 8.0	H = Ø2.8
B = M2.6	I = 2.8
C = 5.2	J = 6.5
D = 2.8	K = 6.5
E = Ø3	L = 94 (12 pole)
F = Ø5	M = 12.2
G = 8.0	N = 16.2



Dimensions mm

A = 10.0	H = Ø3.6
B = M3	I = 3.2
C = 6.4	J = 8.5
D = 3.5	K = 7.9
E = Ø3.6	L = 117 (12 pole)
F = Ø5.7	M = 14.9
G = 10.0	N = 20.0

HE6



Flat base with wire protector

12 mm

4.2 mm

7 mm



4-6 mm²

20-10 AWG

400V

300 V

16 A

40 A

0.8 Nm

7.0 lb-in

Cat. No. Std. Pk.

HE6WPR/02 100

HE6WPR/03 100

HE6WPR/04 100

HE6WPR/05 100

HE6WPR/06 50

HE6WPR/07 50

HE6WPR/08 50


HE6WPR/09 50

HE6WPR/10 25

HE6WPR/11 25

HE6WPR/12 25

HE10



Flat base with wire protector

15 mm

4.3 / 5.7 mm

8.5 mm



6-10 mm²

18-8 AWG

400V

300 V

25 A

50 A

1.2 Nm

10.6 lb-in

Cat. No. Std. Pk.

HE10WPR/02 50

HE10WPR/03 50

HE10WPR/04 50

HE10WPR/05 50

HE10WPR/06 25

HE10WPR/07 25

HE10WPR/08 25


HE10WPR/09 25

HE10WPR/10 10

HE10WPR/11 10

HE10WPR/12 10

HE16



Flat base with wire protector

15 mm

4.3 / 5.7 mm

8.5 mm



10-16 mm²

18-6 AWG

400 V

300 V

35-63 A

63 A

2.0 Nm

17.7 lb-in

Cat. No. Std. Pk.

HE16WPR/02 50

HE16WPR/03 50

HE16WPR/04 50

HE16WPR/05 50

HE16WPR/06 25

HE16WPR/07 25


HE16WPR/08 25

HE16WPR/09 25

HE16WPR/10 10


HE16WPR/11 10

HE16WPR/12 10




Dimensions mm

A = 12.0 H = Ø4.1
B = M3.5 I = 4.0
C = 7.7 J = 9.5
D = 4.3 K = 8.9
E = Ø4.2 L = 140 (12 pole)
F = Ø6.3 M = 16.8
G = 12.0 N = 22.6



Dimensions mm

A = 15.0 H = Ø5.0
B = M4 I = 4.8
C = 9.3 J = 11.3
D = 5.7 K = 11.6
E = Ø4.3/5.7 L = 175 (12 pole)
F = Ø8.2 M = 21.9
G = 15.0 N = 25.1

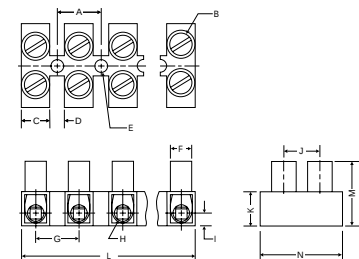

Dimensions mm

A = 15.0 H = Ø5.6
B = M5 I = 4.8
C = 9.3 J = 11.3
D = 5.7 K = 11.6
E = Ø4.3/5.7 L = 175 (12 pole)
F = Ø8.2 M = 21.9
G = 15.0 N = 25.1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Altech:

[HCL8-9](#) [HCL8-6](#) [HE1WPR/05](#) [HCL10-6](#) [HE10WPR/12](#) [HE16WPR/05](#) [HE16WPR/06](#) [HE16WPR/12](#) [HE1HWPR/12](#)
[HE1WPR/03](#) [HE1WPR/04](#) [HE1WPR/10](#) [HE1WPR/12](#) [HE42BU/10](#) [HE4WPR/03](#) [HE4WPR/04](#) [HE4WPR/12](#)
[HE6WPR/12](#) [HE4WPR/02](#) [HE4WPR/05](#) [HE4HNWPR/03](#) [HE4WPR/06](#) [HE1WPR/12/MS](#) [HE1HWPR/02](#)
[HE4HNWPR/12](#) [HE10HWPR/12](#) [HE6HWPR/12](#) [HE4WPR/07](#) [HE4WPR/11](#) [HE4WPR/09](#) [HE4WPR/10](#) [HE4WPR/08](#)
[HE10WPR/03](#) [HE1WPR/02](#) [HE1WPR/11](#) [HE1WPR/06](#) [HE1WPR/08](#) [HE1WPR/07](#) [HE1WPR/09](#)