



System and Handling Push-Wire Connectors for Junction Boxes, Series 773

Stripped length

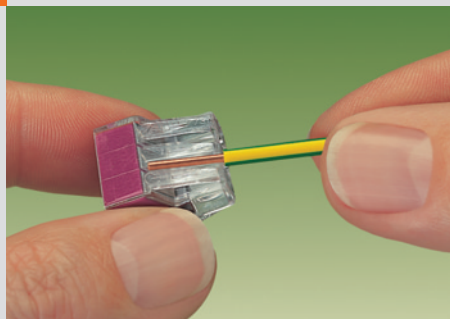


Strip solid conductor to 12 mm / 0.47 in

Push-wire connection

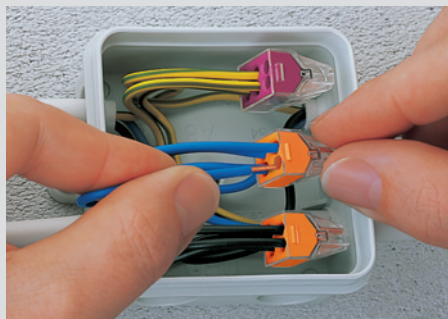


Connection: Insert stripped solid conductor FULLY

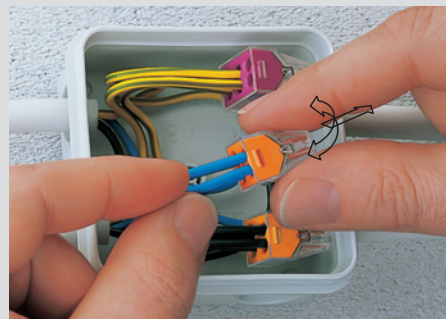


Removal: Hold wire to be removed and twist alternately left and right while pulling the connector

Stranded conductors

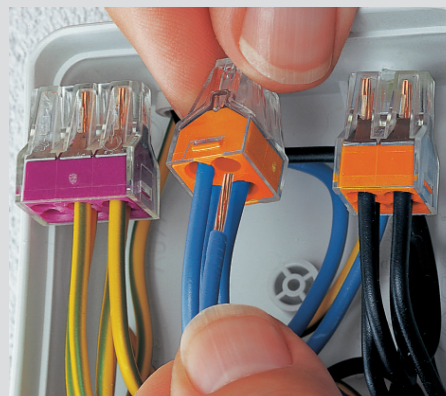

Connection: Insert stripped stranded conductor FULLY

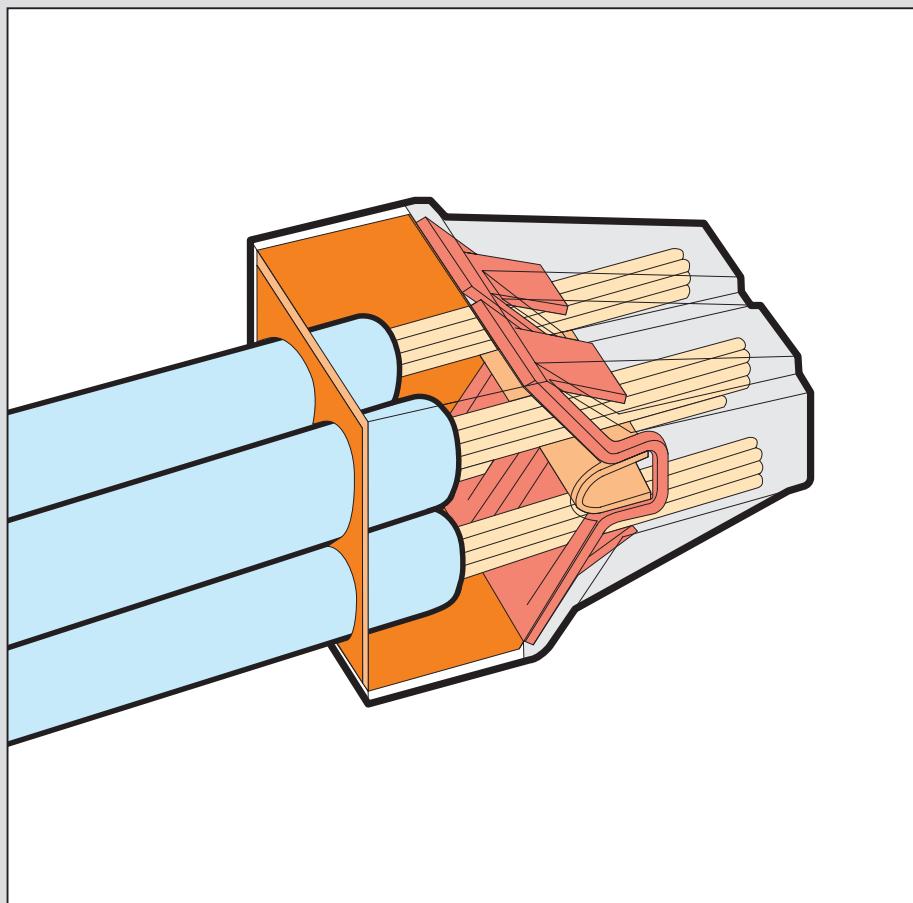


Testing



Testing


Applications

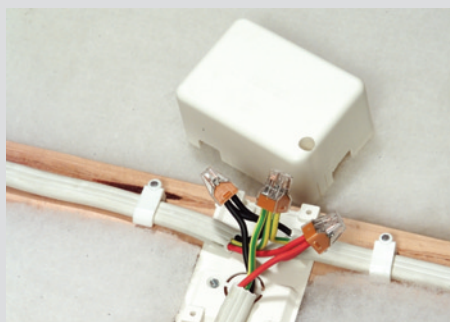

Push-wire connectors used in a junction box.
(Australia)



Push-wire connectors used in a junction box.
(Japan)

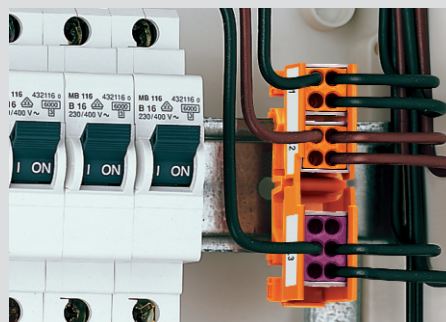


Fixing carrier

The push-wire connection clamps the following copper wires:




solid





stranded

Push-Wire Connectors for Junction Boxes Series 773





8
3

2 x 0.75 – 2.5 mm² "s" 2 x 1.5 – 2.5 mm² "st" 400 V/4 kV/2** 24 A 2 x AWG 18 – 12 "sol." 2 x AWG 16 – 12 "str." 600 V, 20 A *	4 x 0.75 – 2.5 mm² "s" 4 x 1.5 – 2.5 mm² "st" 400 V/4 kV/2** 24 A 4 x AWG 18 – 12 "sol." 4 x AWG 16 – 12 "str." 600 V, 20 A *	Carrier for push-wire connectors Carrier width 18 mm / 0.71 in
--	--	--






Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack. unit pcs
Push-wire connectors for junction boxes ①, 2-conductor connectors, colour of housing transparent, colour of cover yellow			Push-wire connectors for junction boxes ①, 4-conductor connectors, colour of housing transparent, colour of cover orange			Fixing carrier for 4 push-wire connectors orange		
	773-102	1000 (10 x 100)		773-104	1000 (10 x 100)		773-332	50 (5 x 10)
						Marker strip, plain		
							243-110	1

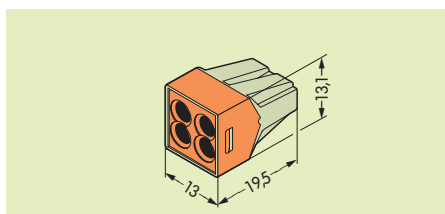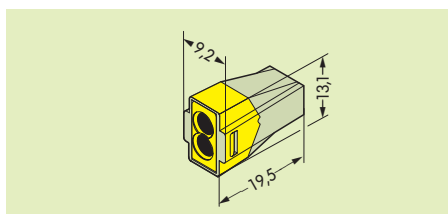

6 x 0.75 – 2.5 mm² "s" 6 x 1.5 – 2.5 mm² "st" 400 V/4 kV/2** 24 A 6 x AWG 18 – 12 "sol." 6 x AWG 16 – 12 "str." 600 V, 20 A *	8 x 0.75 – 2.5 mm² "s" 8 x 1.5 – 2.5 mm² "st" 400 V/4 kV/2** 24 A 8 x AWG 18 – 12 "sol." 8 x AWG 16 – 12 "str." 600 V, 20 A *	3 x 2.5 – 6 mm² "s + st" 400 V/4 kV/2** 41 A 3 x AWG 14 – 10 "sol." + "str." 600 V, 30 A *
--	--	--



Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs	Colour	Item No.	Pack.-unit pcs
Push-wire connectors for junction boxes ①, 6-conductor connectors, colour of housing transparent, colour of cover violet			Push-wire connectors for junction boxes ①, 8-conductor connectors, colour of housing transparent, colour of cover dark grey			Push-wire connectors for junction boxes, 3-conductor connectors, colour of housing transparent, colour of cover red		
	773-106	500 (10 x 50)		773-108	500 (10 x 50)		773-173	500 (10 x 50)

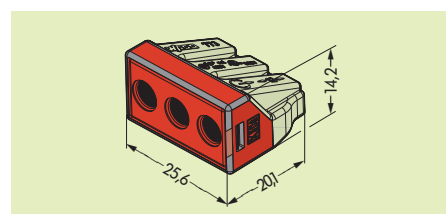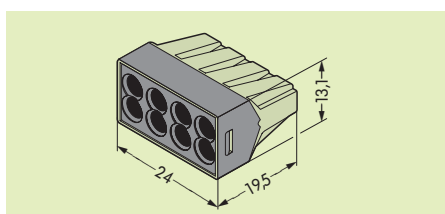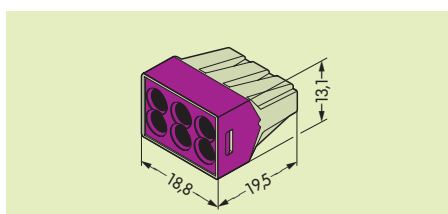

* You can find approvals on the Internet at www.wago.com.

** In grounded (earthed) supply system

① Also available for increased continuous service temperature of 120 °C

Technical explanations and abbreviations see page 10.2.

WAGO

8