


T1/CEPT/ISDN-PRI TRANSFORMER 0553-0013-13

Bel provides a new transformer to be used in multiple T1/CEPT/ISDN-Pri applications.


* Primary Inductance is 1.2 mH minimum.

* Isolation Voltage - 1500Vrms.

M E C H A N I C A L S

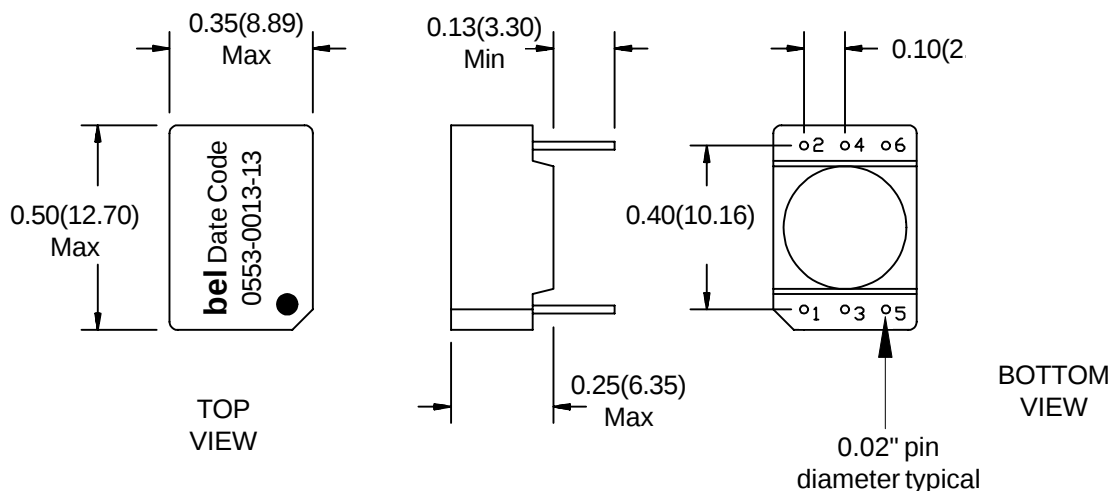

SCHEMATIC

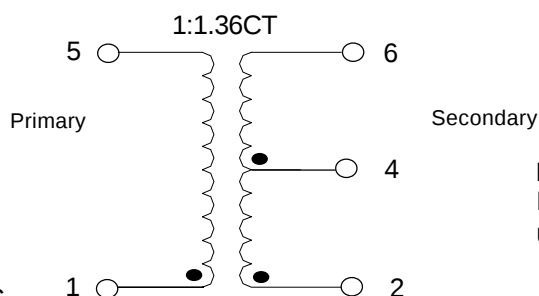

Dimensions in inches(mm)
Dimension tolerance +/- 0.01(0.25)
unless otherwise stated

ELECTRICALS @ 25° C.

Part Number	Primary Inductance OCL (mH) Min	Turns Ratio +/- 5%	Coupling Capacitance (pF) Max	Leakage Inductance L_L (μH) Max	DCR (ohms) Max	
		Pins (1-5):(2-6)			Pins (1-5)	Pins (2-6)
0553-0013-13	1.20	1:1.36CT	35	0.80	0.7	0.9

Corporate Office

Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366