

# 340-002 O-Ring Sealed Shorting Cap Backshell Direct Coupling





34

## CONNECTOR DESIGNATORS A-B\*-C-D-E-F G-H-J-K-L-S

\* Conn. Desig. B See Note 3

### DIRECT COUPLING

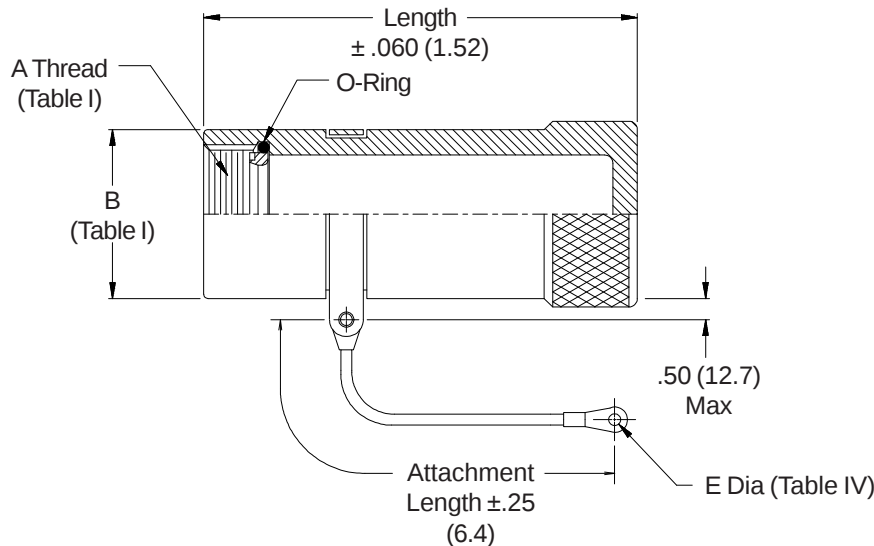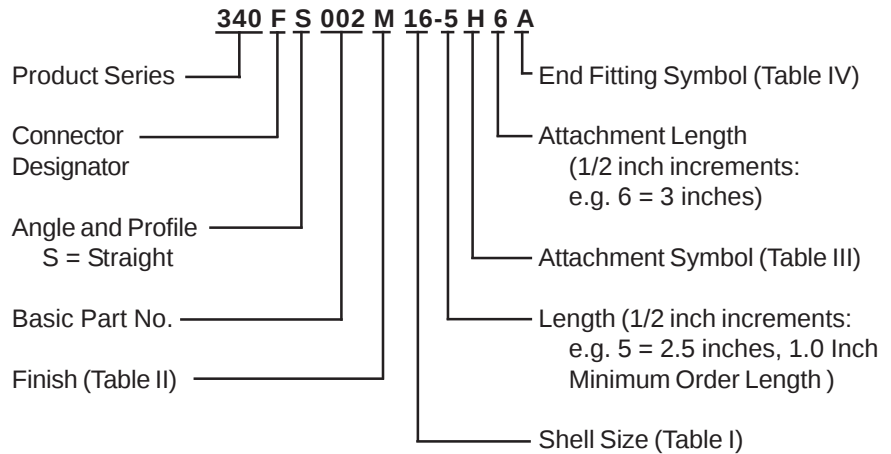

See inside back cover  
fold-out or pages 13 and  
14 for unabridged  
Tables I and II.

TABLE IV: END FITTING

| Symbol | E Dia.     |
|--------|------------|
| A      | .140 (3.6) |
| B      | .167 (4.2) |
| C      | .182 (4.6) |
| D      | .191 (4.9) |
| E      | .125 (3.2) |
| F      | .218 (5.5) |

TABLE III: ATTACHMENT OPTIONS

| Symbol | Attachment                                     |
|--------|------------------------------------------------|
| C      | No attachment, body strap only                 |
| D      | Bead chain, cres, passivate, with terminal     |
| E      | Link chain, cres, passivate, with reverse link |
| F      | Wire rope, nylon jacket, with terminal         |
| G      | Nylon rope, with terminal                      |
| H      | Wire rope, teflon jacket, with terminal        |
| N      | Attachment omitted                             |
| R      | Wire rope, PVC jacket, with terminal           |
| S      | #8 Sash chain, cres, passivate                 |
| U      | Wire rope, polyurethane jacket, with terminal  |

TABLE II: STANDARD FINISHES

| GLENAIR |                                                      |
|---------|------------------------------------------------------|
| SYMBOL  | FINISH                                               |
| B       | Cadmium Plate, Olive Drab                            |
| C       | Anodize, Black                                       |
| G       | Hard Coat, Anodic                                    |
| M       | Electroless Nickel                                   |
| NF      | Cadmium Plate, Olive Drab Over<br>Electroless Nickel |

See Back Cover for Complete Finish Information  
and Additional Finish Options

1. Metric dimensions (mm) are indicated in parentheses.
2. Custom engraving available, consult factory.
3. When using Connector Designator B refer to pages 18 and 19 for part number development.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[340HS002NF21-5C](#) [340HS002M15-2N](#) [340HS002M17-2H10B](#) [340HS002NF13-4N](#) [340HS002NF25-4N](#)  
[340HS002NF25-6N](#) [340XS002NF14-4H8B-737A](#) [340HS002NF09-4N](#) [340HS002NF15-4N](#) [340MS002ZN6-2G8B](#)  
[340HS002NF15-2N-102](#) [340HS002B11-2N](#) [340XS002M07-2N-706A](#)