


1502



1508

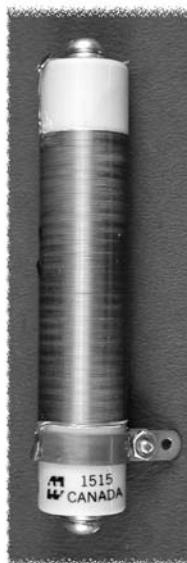

1515



1518



1521

Chokes

## R.F. CHOKES

- Low loss ceramic or powdered iron forms
- Tolerance +/- 10% on inductance
- Catalog numbers 1515, 1518, 1521 designed for heavy duty use in linear amplifiers or other transmitter applications.
- Wound on 1" dia. ceramic forms with standoff insulators and 1/4-20 mounting bolt.

| Part No. | D.C. mA | Induct. (mH) | D.C. Res. (ohms) | No. of Pies | Form Type | Length (Inches) | Wt. Oz. |
|----------|---------|--------------|------------------|-------------|-----------|-----------------|---------|
| 1502     | 500     | 0.007        | 1.3              | Layer       | Ceramic   | 1.5             | 0.25    |
| 1508     | 500     | 0.035        | 3.1              | Layer       | Ceramic   | 3               | 1.3     |
| 1515     | 500     | 0.25         | 3.0              | Layer       | Ceramic   | 4               | 8       |
| 1518     | 750     | 0.1          | 1.2              | Layer       | Ceramic   | 4               | 8       |
| 1521     | 1000    | 0.09         | 0.68             | Layer       | Ceramic   | 4               | 8       |

### EUROPE

Basingstoke, UK 01256 812812

### AUSTRALIA

Queenstown, Australia 61-8-8240-2244

[www.hammondmfg.com](http://www.hammondmfg.com)



### CANADA

Guelph, Ontario (519) 822-2960  
St. Laurent, Quebec (514) 343-9010

### USA

Cheektowaga, NY (716) 630-7030



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hammond:

[1509](#) [1506](#) [1500](#) [1510](#)