

MODEL CT - CURRENT TRANSFORMER




SPECIFICATIONS

- Operating Frequency:** 50 to 400 Hz.
- Insulation Class:** 0.6 KV BIL 10 KV full wave.
- Terminals:** Brass studs No. 8-32 UNC with flat washer and hex nuts.
- Window Diameter:** 1.13" (28.7 mm).
- Weight:** 8.0 oz (226.0 g).

	UL FILE #	CSA FILE #
Instrument Transformers, Inc.	E93779	89403
Tyco Electronics	E348387	253481
Crompton Instruments a Tyco Electronics Company	E257877	237637

Note: The listed current ratio of the current transformer is based on the primary conductor passing once through the transformer opening. The ratio is reduced in multiples by looping the conductor through the opening. A transformer having a ratio 200:5 changes to a ratio of 100:5 if two loops are made through the transformer with the primary conductor. The ratio of the transformer will be 50:5 if four loops are made with the primary conductor, etc.

DIMENSIONS In inches (mm)

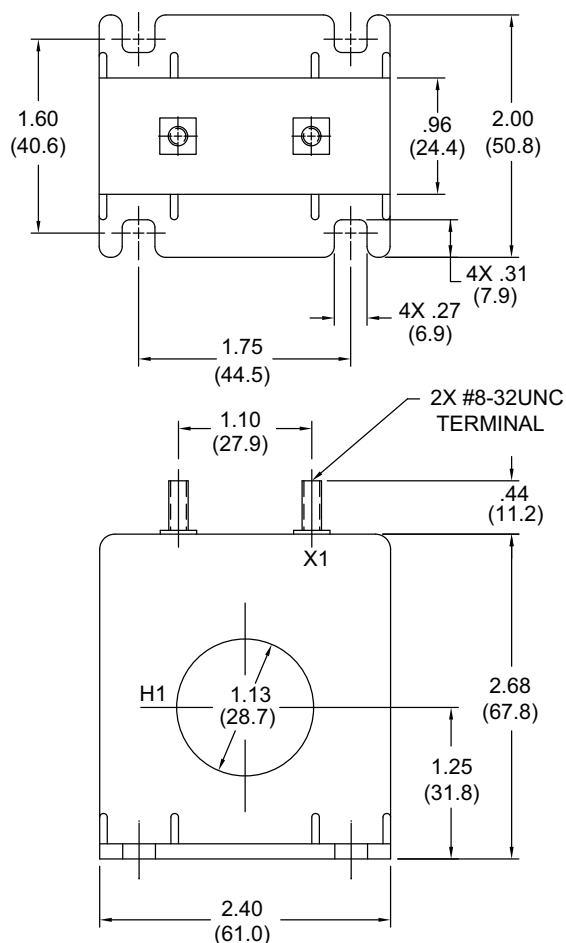

ORDERING INFORMATION

CURRENT RATIO	ACCURACY @ 60 Hz	VA 60 Hz BURDEN	MAXIMUM OUTPUT WIRE DISTANCE BETWEEN CT AND METER				PART NUMBERS
			18 AWG	16 AWG	14 AWG	12 AWG	
50:0.1	±5.0%	2.5	Wire distance is not an issue due to the low current flow. Wires may be as long as needed.				CT005001
50:5	±3.0%	2.0	5.0 ft.	7.5 ft.	12 ft.	18 ft.	CT005050
200:5	±1.0%	4.0	10 ft.	17.5 ft.	28 ft.	43 ft.	CT020050



Do not dispose of unit in trash - Recycle

Red Lion Controls
Headquarters
20 Willow Springs Circle
York PA 17406
Tel +1 (717) 767-6511
Fax +1 (717) 764-0839

Red Lion Controls
Europe
Softwareweg 9
NL - 3821 BN Amersfoort
Tel +31 (0) 334 723 225
Fax +31 (0) 334 893 793

Red Lion Controls
India
201-B, 2nd Floor, Park Centra
Opp 32 Mile Stone, Sector-30
Gurgaon-122002 Haryana, India
Tel +91 984 487 0503

Red Lion Controls
China
Unit 302, XinAn Plaza
Building 13, No.99 Tianzhou Road
ShangHai, P.R. China 200223
Tel +86 21 6113 3688
Fax +86 21 6113 3683