

HIGH POWER DIRECTIONAL COUPLERS


Click package to view outline drawing

COAXIAL CONNECTOR




COUPLING (dB)	FREQUENCY RANGE LF-HF	COUPLING FLATNESS	MAINLINE LOSS (dB)	DIRECTIVITY (dB)	INPUT POWER	VSWR TYP	IMPEDANCE	PACKAGE	MODEL
NOM.	(MHz)	(dB)	MAX.	MIN.	MAX.		(OHMS)		
30.0 + 1.0	800 - 2000	+ 0.4	0.4	20	100	1.25:1	50	210	KEK-706H
30.0 + 0.75	850 - 960	+ 0.25	0.2	30	500	1.15:1	50	207	KEK-704H
30.0 + 0.75	1800 - 2000	+ 0.25	0.2	30	500	1.15:1	50	208	KEK-705H
30.0 + 0.75	1500 - 2200	+ 1.0	0.5	30	500	1.15:1	50	208	KEK-707H


For pin location and package outline drawings, see back pages.

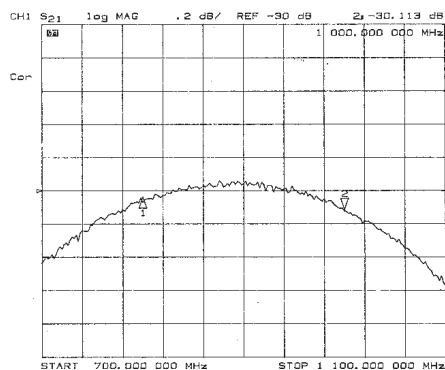


KEK-704H (COUPLING)

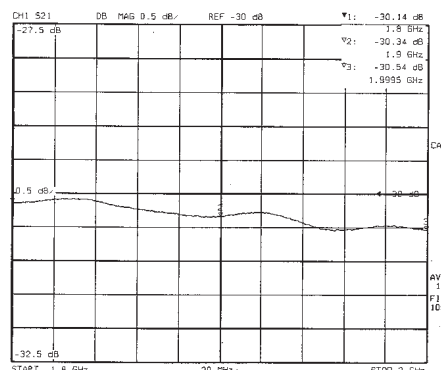

KEK-705H (COUPLING)

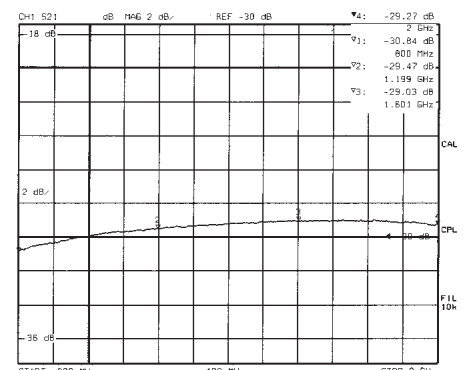

KEK-706H (COUPLING)

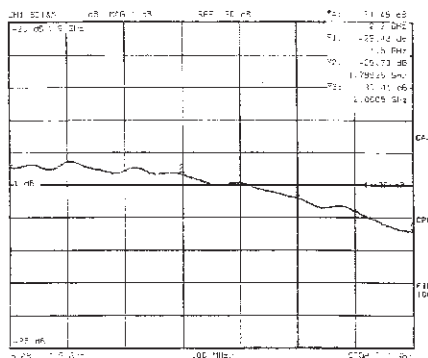

KEK-707H (COUPLING)