


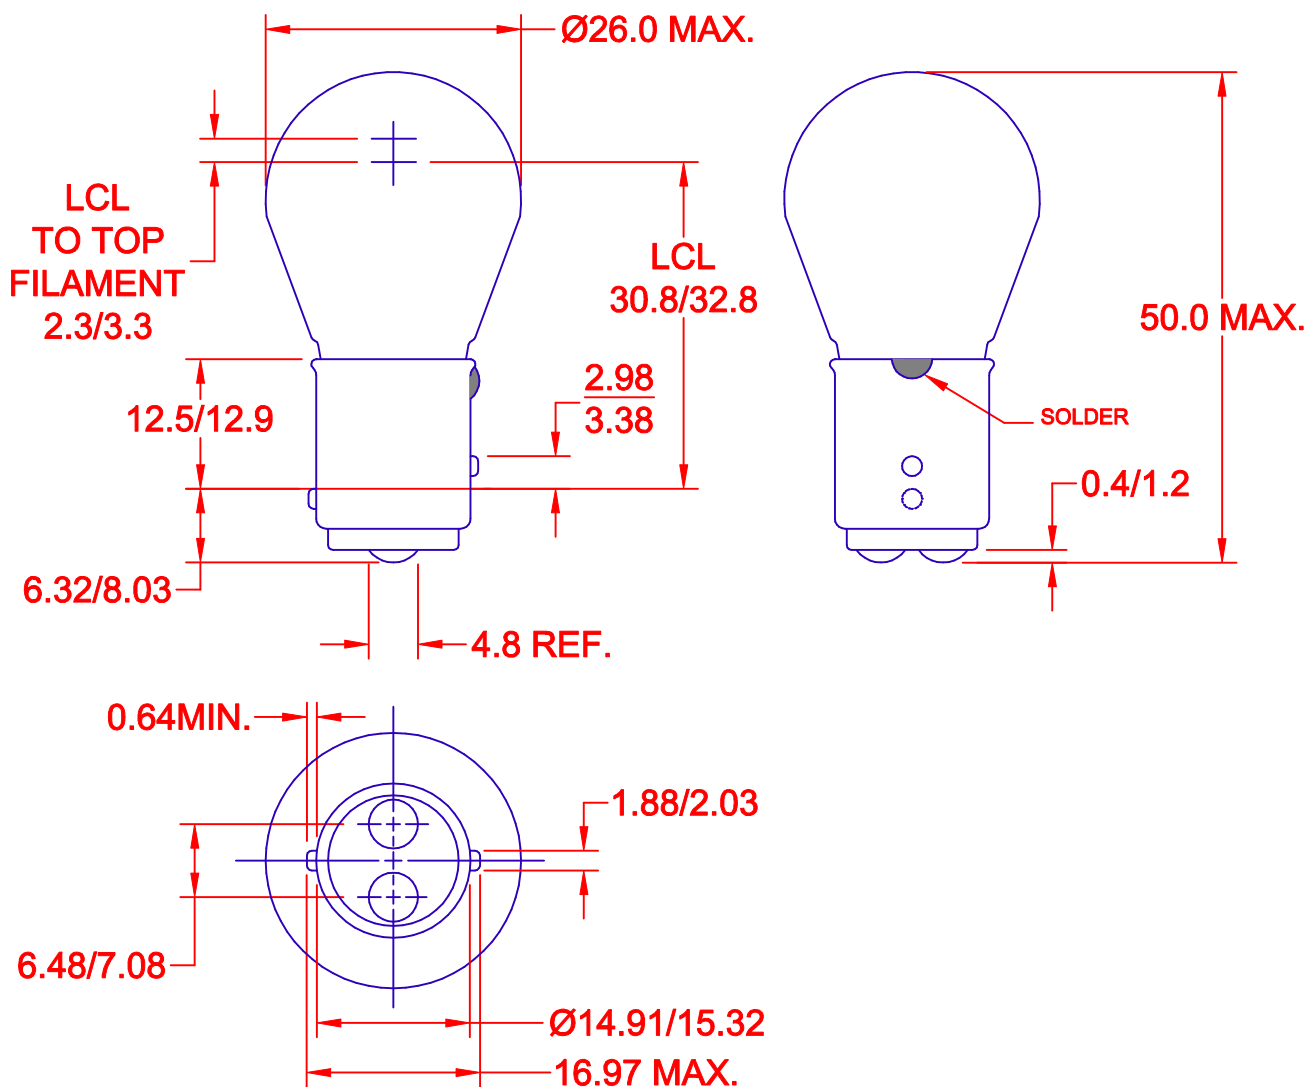

JKL LAMP NUMBER	VOLTS RATED	AMPS $\pm 10\%$	MSCP $\pm 25\%$	LUMENS $\pm 25\%$	AVERAGE LIFE HRS.	FILAMENT TYPE AND POSITION
1034	12.8 14.0	1.80 .59	32.0 3.0	402.2 37.7	200 5,000	C-2R POSITION #2 = 2 FILAMENTS C-2R POSITION #1 = 1 FILAMENT
1157	12.8 14.0	2.10 .59	32.0 3.0	402.2 37.7	1,200 3,000	C-2R POSITION #2 = 2 FILAMENTS C-2R POSITION #1 = 1 FILAMENT

METRIC	DIMENSIONS ARE IN MILLIMETERS
	TOLERANCE UNLESS OTHERWISE SPECIFIED
THIRD ANGLE PROJECTION	1 PL +/- 0.2
	2 PL +/- 0.20
	ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE
**S-8 DOUBLE CONTACT INDEX
BAYONET BASE LAMP**

DRAWN BY
L. WENGSTROM

APPVD BY
QC

SIZE
A

FSCM NO.
55335

DRAWING NO.
BAYONET DOUBLE CONTACT INDEX S-8

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE
NONE

RELEASED DATE
5/9/01

REVISION DATE
5/18/01

REV. NO. **A** SHEET **1 OF 1**

REV. NO.	DESCRIPTION/ECO NUMBER	APPVD DATE
A	DIM. CHNG ON CONTACTS TO 6.48/7.08 RELEASED AS CAD	5/18/01 5/9/01