


MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING
WZ-2RQ18T

ATM8500

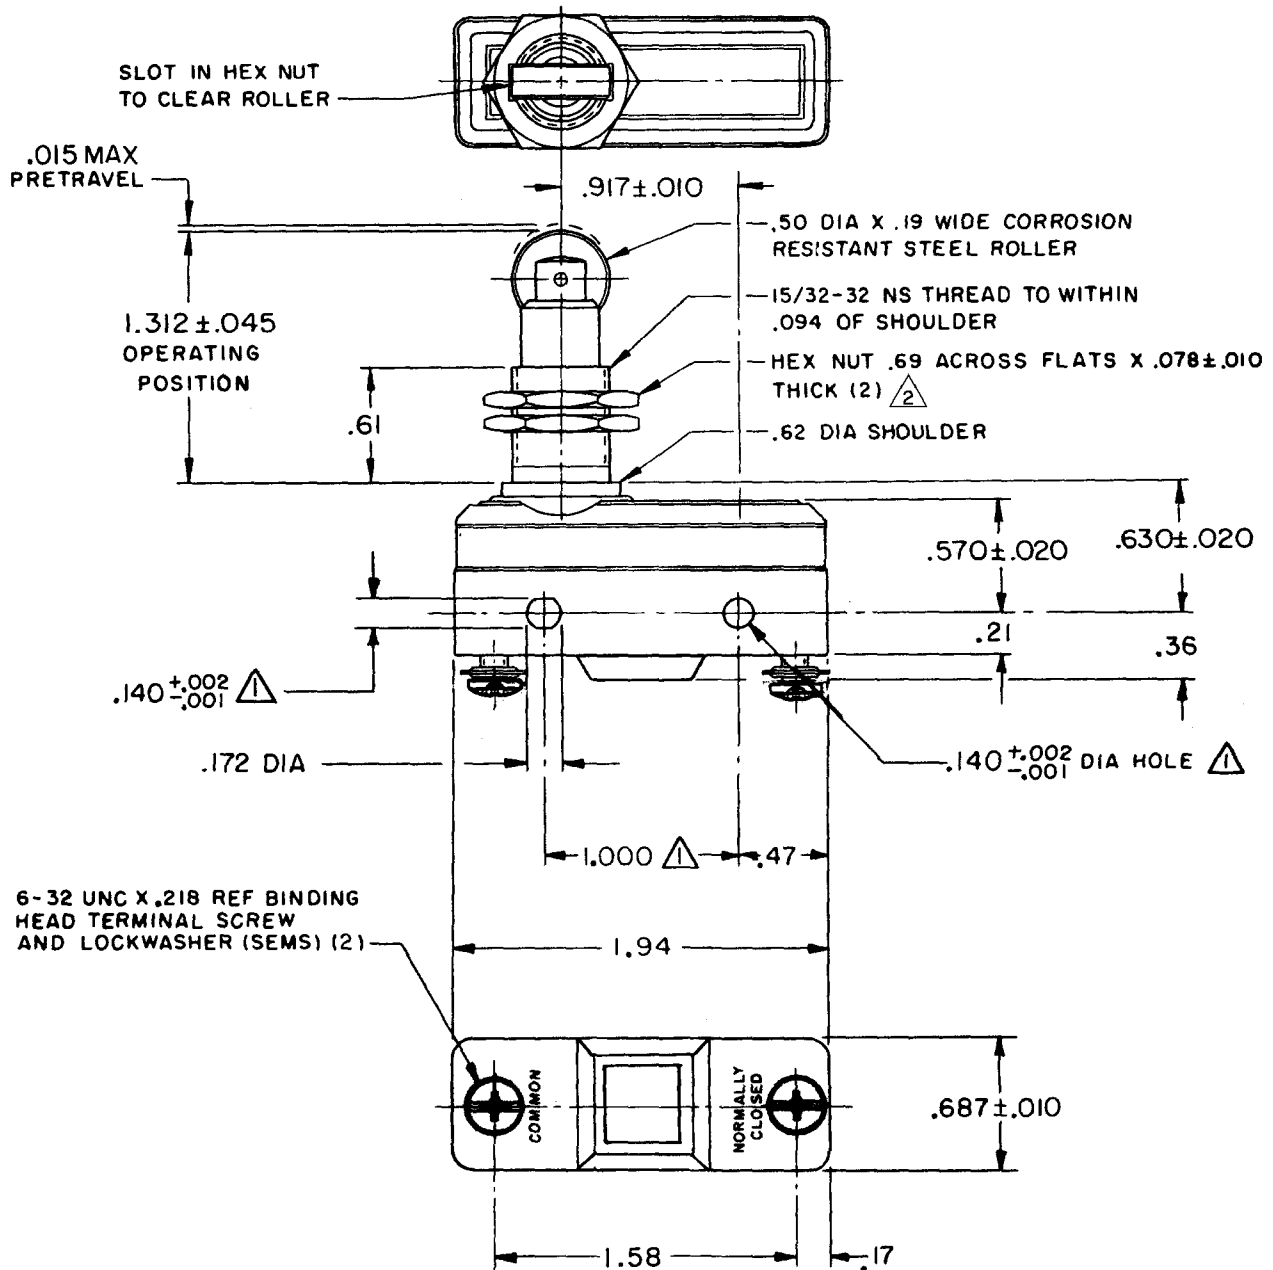


NOTES

- Δ 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- Δ 2 HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE----- 9-13 OZ
RELEASE FORCE----- 4 OZ MIN
DIFFERENTIAL TRAVEL-- .0004-.0020
OVERTRAVEL----- .141 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P N C

CODE L 96 15A-125, 250, 480VAC
1/8 HP-125VAC; 1/4 HP-250VAC
1/2A-125VDC; 1/4A-250VDC
L288
L315
L306



16A 250V ~ T85 5E4

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	1/.04	
ONE PLACE	X,X	0.4/.016	X,X 0.8/.03
TWO PLACES	X,XX	0.15/.006	X,XX 0.38/.015
THREE PLACES			X,XXX 0.13/.005
ANGLES			

DESIGN UNITS ☐ SI METRIC

☒ US CUSTOMARY

WEIGHT .107 LB

WZ-2RQ18T

PAGE 1 OF 1

M

DRAWING
NUMBER

7

ISSUE

REVISIONS

A	CO-69351-D	JWB	18 JUL 91
B	CO-77591	DAW	22 JUN 94
C	CO-79125	SAD	30 NOV 94
D	CO-82133	CSL	1 AUG 96
E	CO-93346	DLT	21 SEP 98
F	0017585	LKM	20 FEB 06

FORMTEK

FO-52848-A

DRAWN

REPLACES

RELEASE NO. PR-5348

CHECK

CHECK

15

75

16

NOV

75

CHECK

30

NOV

75

CHECK

14

NOV

75

CHECK

14

NOV

75

CHECK

14

NOV

75

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[WZ-2RQ18T](#)