

# Fuse Terminal Blocks for Class CC and 10 x 38 mm ( $1\frac{3}{32}$ " x $1\frac{1}{2}$ ") Fuses 811 Series

|                                                                                                                                                  |                                           |                                                                                                                                                   |                                                                                                       |                                                                                                                                                     |                                                                    |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| 2.5 - 16 mm <sup>2</sup><br>1000 VDC, 32 A                                                                                                       | AWG 16 - 6<br>1000 VDC, 30 A <sup>Ⓢ</sup> | 2.5 - 16 mm <sup>2</sup><br>690 VAC, 32 A<br>1000 VDC, 32 A                                                                                       | AWG 16 - 6<br>600 VAC, 30 A <sup>Ⓢ</sup><br>750 VAC, 30 A <sup>Ⓢ</sup><br>1000 VDC, 30 A <sup>Ⓢ</sup> | 2.5 - 16 mm <sup>2</sup><br>–<br>–                                                                                                                  | AWG 16 - 6<br>600 V, 30 A <sup>Ⓢ</sup><br>600 V, 30 A <sup>Ⓢ</sup> |
| Terminal block width 17.5 mm / 0.689 in<br> 12 - 13 mm / 0.49 in |                                           | Terminal block width 17.5 mm / 0.689 in<br> 12 - 13 mm / 0.49 in |                                                                                                       | Terminal block width 17.5 mm / 0.689 in<br> 12 - 13 mm / 0.49 in |                                                                    |



105 mm/4.13 in




105 mm/4.13 in



105 mm/4.13 in

| Item No.                                                                                                                                                                                                                                                | Pack. Unit | Item No.                                                                                                                                                                                                            | Pack. Unit | Item No.                                                                                                                                                      | Pack. Unit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>Fuse terminal block for cylindrical fuses 10 x 38 mm; <math>1\frac{3}{32}</math>" x <math>1\frac{1}{2}</math>", for photovoltaic applications, light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715</b>              |            | <b>Fuse terminal block for 10 x 38 mm; <math>1\frac{3}{32}</math>" x <math>1\frac{1}{2}</math>", light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715</b>                           |            | <b>Fuse terminal block for class CC fuses, light gray, without blown fuse indication, suitable for DIN 35 rail acc. to EN 60715</b>                           |            |
| ○ 1-pole <b>811-316</b>                                                                                                                                                                                                                                 | 12         | ○ 1-pole <b>811-310</b>                                                                                                                                                                                             | 12         | ○ 1-pole <b>811-410</b>                                                                                                                                       | 12         |
|                                                                                                                                                                                                                                                         |            | ○ 2-pole <b>811-320</b>                                                                                                                                                                                             | 6          | ○ 2-pole <b>811-420</b>                                                                                                                                       | 6          |
|                                                                                                                                                                                                                                                         |            | ○ 3-pole <b>811-330</b>                                                                                                                                                                                             | 4          | ○ 3-pole <b>811-430</b>                                                                                                                                       | 4          |
| <b>Fuse terminal block for cylindrical fuses 10 x 38 mm; <math>1\frac{3}{32}</math>" x <math>1\frac{1}{2}</math>", for photovoltaic applications, light gray, with blown fuse indication, 230 - 1000 VDC, suitable for DIN 35 rail acc. to EN 60715</b> |            | <b>Fuse terminal block for 10 x 38 mm; <math>1\frac{3}{32}</math>" x <math>1\frac{1}{2}</math>", light gray, with blown fuse indication, 90 - 600 VAC, 115 - 600 VDC, suitable for DIN 35 rail acc. to EN 60715</b> |            | <b>Fuse terminal block for class CC fuses, light gray, with blown fuse indication, 90 - 600 VAC, 115 - 600 VDC, suitable for DIN 35 rail acc. to EN 60715</b> |            |
| ○ 1-pole <b>811-317</b>                                                                                                                                                                                                                                 | 12         | ○ 1-pole <b>811-311</b>                                                                                                                                                                                             | 12         | ○ 1-pole <b>811-411</b>                                                                                                                                       | 12         |
|                                                                                                                                                                                                                                                         |            | ○ 2-pole <b>811-321</b>                                                                                                                                                                                             | 6          | ○ 2-pole <b>811-421</b>                                                                                                                                       | 6          |
|                                                                                                                                                                                                                                                         |            | ○ 3-pole <b>811-331</b>                                                                                                                                                                                             | 4          | ○ 3-pole <b>811-431</b>                                                                                                                                       | 4          |
| <b>Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35°C to +85°C. Nominal voltage and current are given by the LED or fuse.</b>                                                                                             |            | <b>Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35°C to +85°C. Nominal voltage and current are given by the LED or fuse.</b>                                                         |            | <b>Cylindrical fuses are not offered by WAGO. Temperature scale handling from -35°C to +85°C. Nominal voltage and current are given by the LED or fuse.</b>   |            |
|                                                                                                                                                                                                                                                         |            | <b>Fuse terminal block for 10 x 38 mm; <math>1\frac{3}{32}</math>" x <math>1\frac{1}{2}</math>", light gray, with blown fuse indication, 24 VDC, suitable for DIN 35 rail acc. to EN 60715</b>                      |            | <b>Fuse terminal block for class CC fuses, light gray, with blown fuse indication, 24 VDC, suitable for DIN 35 rail acc. to EN 60715</b>                      |            |
|                                                                                                                                                                                                                                                         |            | ○ 1-pole <b>811-314</b>                                                                                                                                                                                             | 12         | ○ 1-pole <b>811-414</b>                                                                                                                                       | 12         |

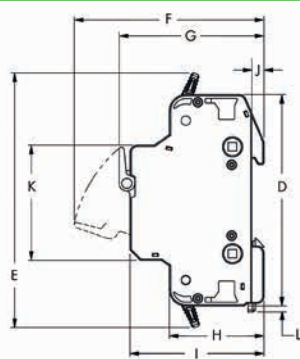

| Dimension | mm (in.)     |
|-----------|--------------|
| A         | 17.3 (0.68)  |
| B         | 34.6 (1.36)  |
| C         | 51.9 (2.04)  |
| D         | 87 (3.43)    |
| E         | 104.9 (4.13) |
| F         | 78.3 (3.08)  |
| G         | 59.7 (2.35)  |
| H         | 39 (1.54)    |
| I         | 55.2 (2.17)  |
| J         | 5 (0.2)      |
| K         | 47.4 (1.87)  |
| L         | 2.5 (0.1)    |