



Audio Video Connectors, RCA, Feed-Thru

Seamless Hubbell System Integration.

Universal Keystone Design fits into all Hubbell Products.

7 Different Insulator Colors.

High Quality Gold Plating.

High performance,
Gold-plated RCA
connector.



Deliver Composite,
Component or
Digital Signals.

High-impact, flame-
retardant polymer.

SPECIFICATIONS

- ◆ **Female Connector:**
Body: Brass
Gold-Plated: 2μ"
- ◆ **Performance:**
Impedance: 75 Ohms
Mating Cycles: 500+
- ◆ **Material:**
Housing: flame retardant polymer rated UL 94V-0.
- ◆ **Insulator Color:** Black, Blue, Green, Orange, Red, White, and Yellow.

Hubbell's RCA gold feed-thru connectors deliver high quality A/V signals to work areas and/or transmitting/receiving devices. Requiring no soldering, these RCA connectors install with a snap and provide a quick easy "push-on" termination.

These RCA-Connectors are available with seven standard insulator colors housed in seven Hubbell colors, accommodating all common A/V applications. RCA-Connectors mount into all **iSTATION™** faceplates, surface mount boxes, modules, frames, Hubbell Delivery System products including poke-throughs and surface raceway, and **iSTATION™** UDX multimedia panels.

Create a customized multimedia workstation by adding a RCA gold feed-thru connector along with Hubbell's extensive line of AV connectors, loaded modules and **XCELERATOR™** jacks.

CONNECTOR TERM

RCA Connector - The standard connector used in line-level consumer and studio sound equipment. RCA connectors supply unbalanced signal and are used in almost all systems and between almost all audio/video components. They are used for inter-connecting Composite, Component and Digital coaxial audio video signals.

APPLICATIONS SUPPORTED

- ▲ Composite/component audio/video distribution.
- ▲ TV, CCTV, CATV and satellite.
- ▲ Home theater and entertainment systems.
- ▲ Cameras, camcorders and projectors.
- ▲ Security and surveillance systems.

CABLE TERMINATION

Cable Type:

- Coax 75 Ohm - RG6, RG59, Mini-Coax, RCA patch cords.

INSTALLATION TIPS

Important: Always allow for clearance behind connection location to ensure for proper bend radius.

Termination: Connection is a "push on" RCA connector (patch cord).

Gold Plating: Gold plating encapsulates the connector's base metal (brass) preventing oxidation/corrosion from forming. It also has a more transparent (increased signal transfer) conductive path over nickel (3x).

AV Connector, RCA Feed-Thru

Sold in carton increments only. Carton contains - 25 keystone connectors (individually bagged).



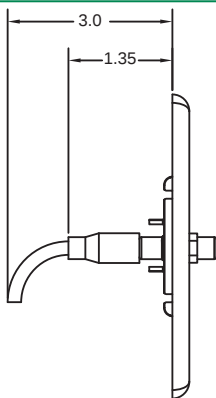
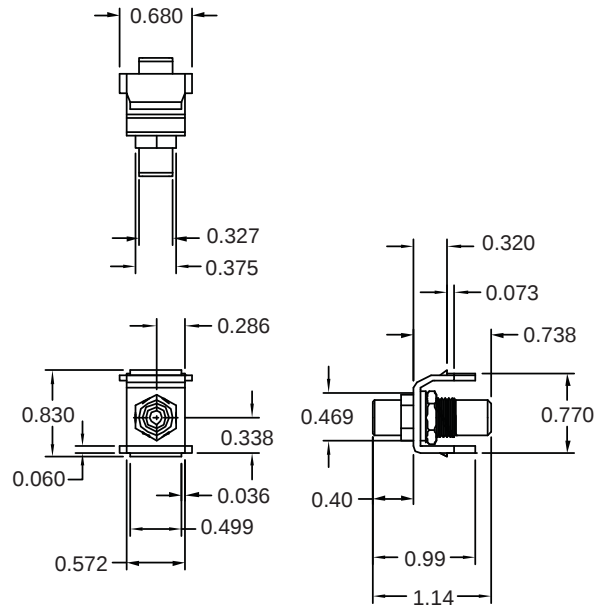
Housing/Insulator Color	Plating	Catalog No.
See below	Gold	SFRCXXFFXX
Housing: Office White	Nickel	SFRCXXFF

XX = Housing Color: "AL" = Almond; "BK" = Black; "EI" = Electric Ivory; "GY" = Gray; "LA" = Light Almond; "OW" = Office White; "W" = White.

XX = Insulator Color: "BK" = Black; "B" = Blue; "GN" = Green; "OR" = Orange; "R" = Red; "W" = White; "Y" = Yellow.

RCA INSULATOR COLOR: APPLICATIONS

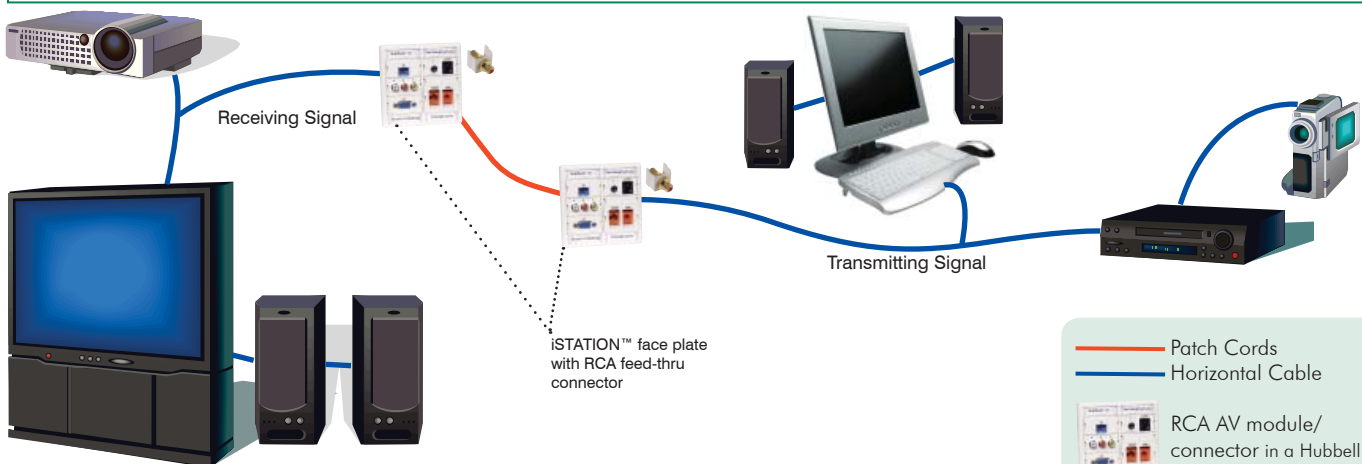
Color	Audio	Video
Red	Right Signal	Component - Red (Pr/Cr)
White	Left Signal	
Yellow		Composite
Blue		Component - Blue (Pb/Cb)
Green		Component - Green (Y)
Black	Mono/Right	
Orange	Digital (S/PDIF)	Digital (S/PDIF)

CONNECTOR DEPTH CHART**DIMENSIONS****iSTATION™ COMPATIBLE****Work Station and Cross-Connect Solutions**

- Front and Rear-loading Plates
- Duplex and Decorator Frames
- ISM Surface Mount Boxes
- UDX Multimedia Panels (except 1U-48)
- NETSELECT® Residential Network Solution
- iFRAME® Vertical Patch Panel

Hubbell Delivery System

- Hubbell SystemOne Poke-Thrus and Floor Boxes
- Hubbell Surface Raceway, Metal and Non-Metallic
- Multi-Connect™ Wall Boxes/Conference Table Boxes
- Power Poles

**TYPICAL APPLICATION****Hubbell Premise Wiring**

HUBBELL INCORPORATED (Delaware)

14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005

Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>

Worldwide Locations

Hubbell Premise Wiring, Asia Pacific
Hubbell Canada Inc.
Hubbell Premise Wiring, Central America
Hubbell Premise Wiring, China
Hubbell Premise Wiring, Europe
Hubbell Premise Wiring, India
Hubbell Int'l. Inc., Korea Branch

852-2836-7131
905-839-1138
506-309-4158
86-21-6374 2660
44-01283 500500
91-80-4022-4089
(82 2) 2607 1363

Fax: 852-2836-7132
Fax: 905-839-9108
Fax: 506-260-1616
Fax: 86-21-6374 2799
Fax: 44-01283 500400
Fax: 91-80-4022-4033
Fax: (82 2) 2603 7386

Hubbell Premise Wiring, Latin America
Hubbell de Mexico, S.A. de C.V.
Hubbell Premise Wiring, Middle East
Hubbell Premise Wiring, Puerto Rico
Hubbell-Taian Co., Ltd., Taiwan
Hubbell Premise Wiring, Venezuela

305-408-4501
(5255) 9151-9999
971-4-393-4192
787-855-1075
886-2-2522-1862
58-212-5156482

Fax: 305-408-8201
Fax: (5255) 9151-9989
Fax: 971-4-393-4194
Fax: 787-855-3265
Fax: 886-2-2522-1872
Fax: 58-212-6627258