Peltier Cooler - 150W





Features:

Transducer Function: Thermoelectric modules

Specifications:

Parameters			Remarks
Internal resistance	$0.85\Omega \pm 10\%$		Note-1
lmax.	8.5A		Note-2
Vmax.	24.6V		Note-3
	Th=25°C		
Qmax.	150W		Note-4
⊿Tmax.	68°C		Note-5
Solder Melting Point	138°C		Note-6
Max. Compress	1MPa		Note-7
Operating Temperature	-90°C to +110°C		
External Depth	3.8mm		
External Length / Height	40mm		

Note-1 Measured by AC 4-terminal method at 25°C

Note-2 Max. current at ⊿Tmax

Note-3 Max. voltage at ⊿Tmax

Note-4 Max. cooling capacity at Imax., Vmax. and ⊿T=0°C

Note-5 Max. temperature difference at Imax., Vmax. and Q=0W

(Maximum parameters are measured in a vacuum 1.3P)

Note-6 The solder melting point of thermoelectric module

Note-7 Recommended Max. compression (not destruction limit)

Recommendations:


- · High cooling capacity from a small surface and long lifetime in power cycling applications with change of current polarity
- With operation current close to 0.5 Imax extremely high COP (coefficient of performance possible)
- Preferable application; high cooling capacity at high temperatures / cycling



Peltier Cooler - 150W



2-3 Performance Graph (298K)

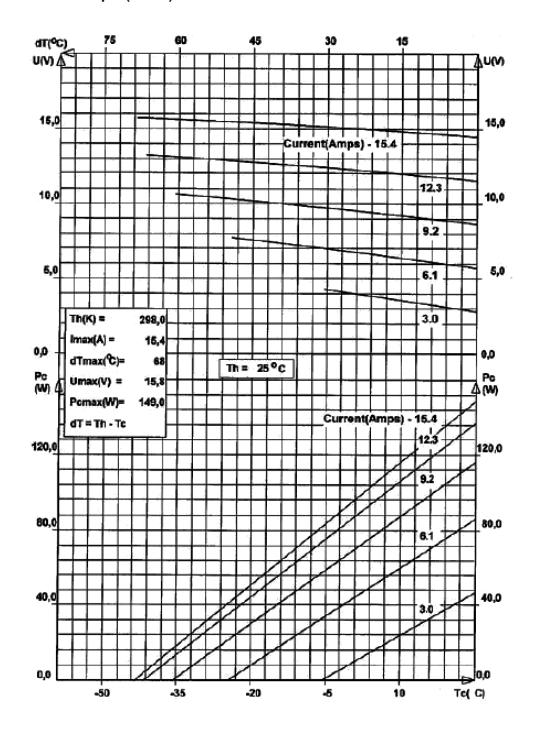




Peltier Cooler - 150W



2-4 Performance Graph (323K)

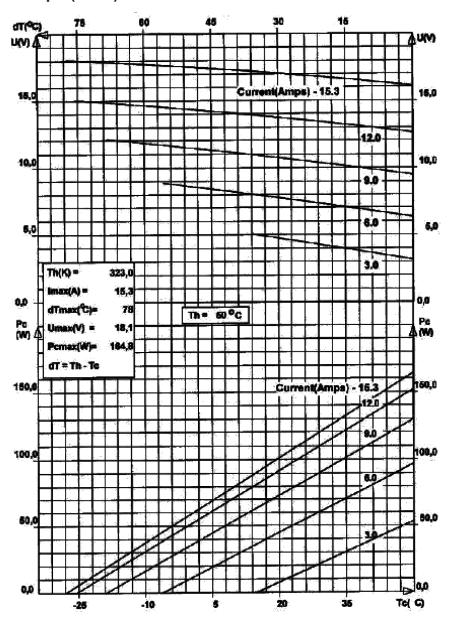

Part Number Table

Description	Part Number	
Peltier Cooler, 150W	MCHPE-127-14-06-E	

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

