

MICRO SWITCH
A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR COMPANY
FREDPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
BAF1-3RN2X-RH

M BAF1-3RN2X-RH

DRAWING
NUMBER

ISSUE
8

REPLACES

RELEASE NO. PR-673

CHECK

REVISIONS

A	PR-673	OMW	25 APR 89
B	CO258 54	D L F	21 MAY 89
C	CO-51000-8	K A G	26 AUG 83
D	CO 54380 8	TSK	16 APR 84
E	CO54997-T	CJH	21 OCT 85
F	CO72788	G J W	4 SEP 92
G	CO 77179-E	DLT	18 MAY 94
H	CO81513B	J A K	6 MAR 97

CHECK

31 AUG 86

31 AUG 86

31 AUG 86

31 AUG 86

FORMTEK

DRAWN


OMW

30 AUG

66

CHECK

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		
CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE - - - - - 1 1/2 LB MAX OVERTRAVEL - - - - - .250 MIN PRETRAVEL - - - - - .219 MAX RESET CHARACTERISTICS OPERATING FORCE - - - - - 1 3/4 LB SWITCH-BASIC REPLACEMENT BA-3RX717 OVERTRAVEL - - - - - .219 MIN	CONTACT ARRANGEMENT SINGLE POLE DOUBLE THROW MAINTAINED CONTACT 20A 125, 250 OR 480VAC 1HP 125VAC, 2HP 250 VAC 1/2A 125VDC, 1/4A 250VDC L224 SP RJ	DO NOT SCALE PRINT UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ± WEIGHT

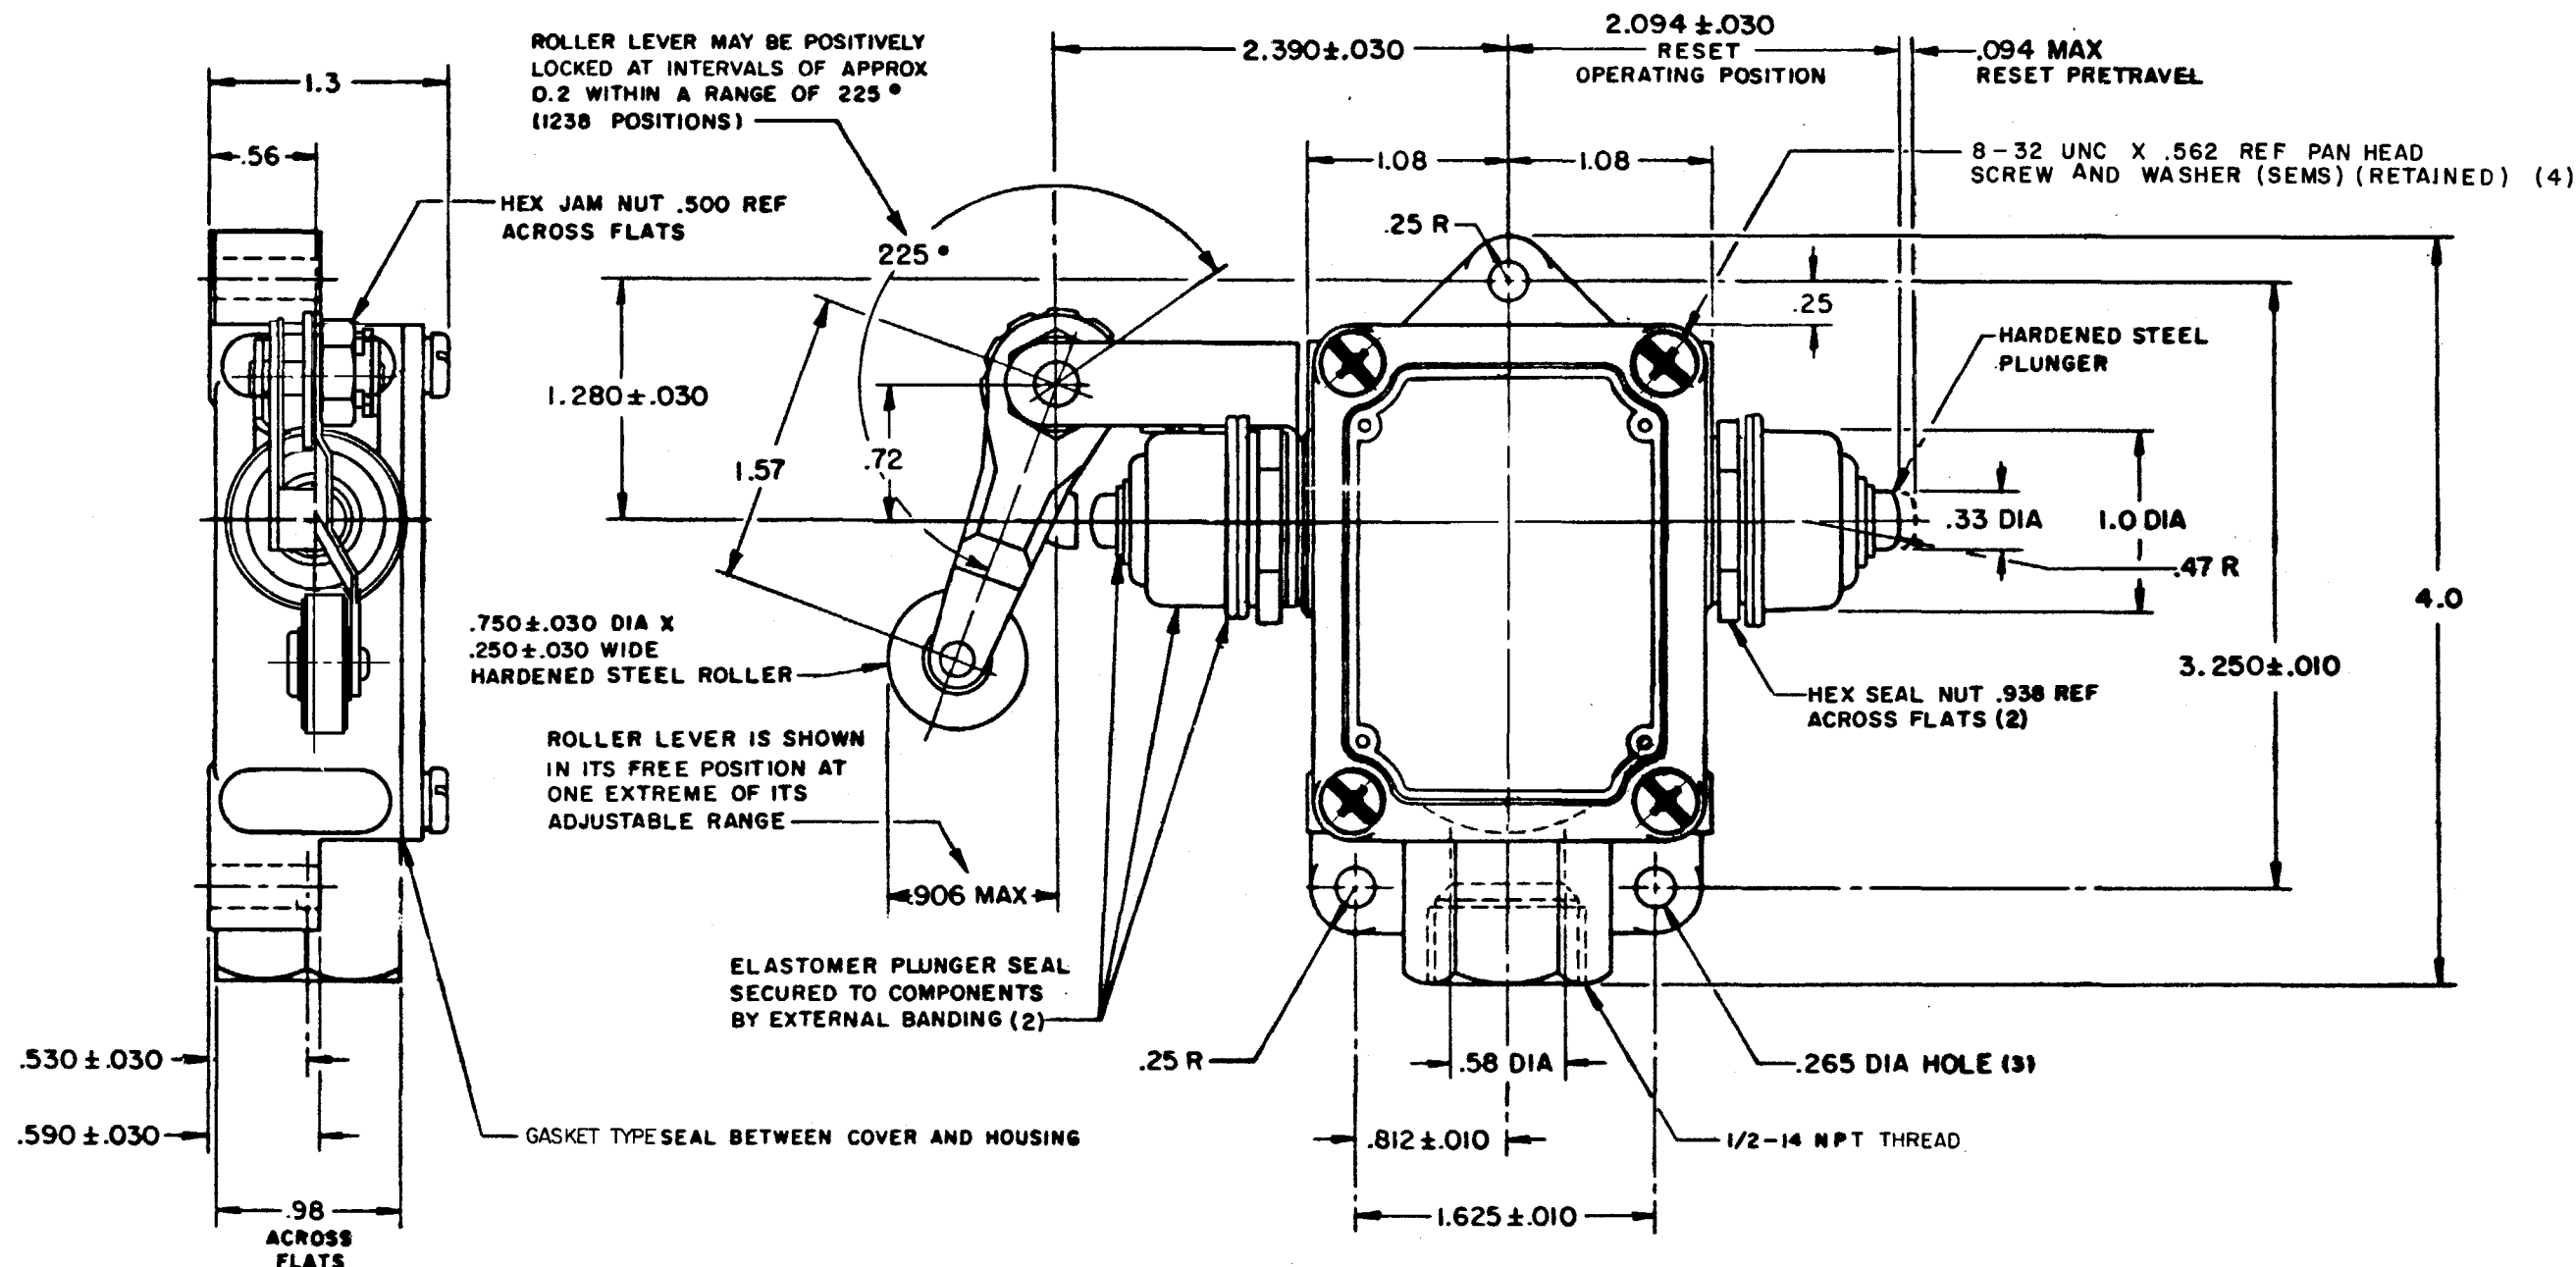

NOTES

- 1 - 6-32 UNC X .219 REF TERMINAL SCREW STAKED (3)
- 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET IN ANY POSITION AROUND AXIS OF PLUNGER