



■ Features :

- Universal AC input/Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- Class I, Div 2 Hazardous Locations T4
- LED indicator for power on
- DC OK relay contact
- No load power consumption<0.75W
- 100% full load burn-in test
- 3 years warranty




SPECIFICATION


| MODEL | | MDR-40-5 | | MDR-40-12 | | MDR-40-24 | | MDR-40-48 | |
|---|---|---|--------------------------|---------------------------------|--|------------|--|--------------|--|
| OUTPUT | DC VOLTAGE | 5V | | 12V | | 24V | | 48V | |
| | RATED CURRENT | 6A | | 3.33A | | 1.7A | | 0.83A | |
| | CURRENT RANGE | 0 ~ 6A | | 0 ~ 3.33A | | 0 ~ 1.7A | | 0 ~ 0.83A | |
| | RATED POWER | 30W | | 40W | | 40.8W | | 39.8W | |
| | RIPPLE & NOISE (max.) <small>Note.2</small> | 80mVp-p | | 120mVp-p | | 150mVp-p | | 200mVp-p | |
| | VOLTAGE ADJ. RANGE | 5 ~ 6V | | 12 ~ 15V | | 24 ~ 30V | | 48 ~ 56V | |
| | VOLTAGE TOLERANCE <small>Note.3</small> | ± 2.0% | | ± 1.0% | | ± 1.0% | | ± 1.0% | |
| | LINE REGULATION | ± 1.0% | | ± 1.0% | | ± 1.0% | | ± 1.0% | |
| | LOAD REGULATION | ± 1.0% | | ± 1.0% | | ± 1.0% | | ± 1.0% | |
| | SETUP, RISE TIME <small>Note.5</small> | 500ms, 30ms/230VAC | | 500ms, 30ms/115VAC at full load | | | | | |
| HOLD UP TIME (Typ.) | 50ms/230VAC | | 20ms/115VAC at full load | | | | | | |
| INPUT | VOLTAGE RANGE | 85 ~ 264VAC | | 120 ~ 370VDC | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | |
| | EFFICIENCY (Typ.) | 78% | | 86% | | 88% | | 88% | |
| | AC CURRENT (Typ.) | 1.1A/115VAC | | 0.7A/230VAC | | | | | |
| | INRUSH CURRENT (Typ.) | COLD START 30A/115VAC | | 60A/230VAC | | | | | |
| | LEAKAGE CURRENT | <1mA / 240VAC | | | | | | | |
| PROTECTION | OVERLOAD | 105 ~ 150% rated output power Protection type : Constant current limiting, recovers automatically after fault condition is removed | | | | | | | |
| | OVER VOLTAGE | 6.25 ~ 7.25V | | 15.6 ~ 18V | | 31.2 ~ 36V | | 57.6 ~ 64.8V | |
| | | Protection type : Shut down o/p voltage, re-power on to recover | | | | | | | |
| FUNCTION | DC OK SIGNAL | Relay contact rating(max.): 30V/1A resistive | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | -20 ~ +70℃ (Refer to "Derating Curve") | | | | | | | |
| | WORKING HUMIDITY | 20 ~ 90% RH non-condensing | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -40 ~ +85℃, 10 ~ 95% RH | | | | | | | |
| | TEMP. COEFFICIENT | ± 0.03%/℃ (0 ~ 50℃) | | | | | | | |
| | VIBRATION | Component : 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes ; Mounting : Compliance to IEC60068-2-6 | | | | | | | |
| SAFETY & EMC <small>(Note 4)</small> | SAFETY STANDARDS | UL508, UL60950-1, TUV EN60950-1, Class I, Div. 2 Group A, B, C, D Hazardous Locations T4 approved | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25℃ / 70% RH | | | | | | | |
| | EMC EMISSION | Compliance to EN55011, EN55032 (CISPR32), EN61204-3 Class B, EN61000-3-2,-3 | | | | | | | |
| | EMC IMMUNITY | Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-2, EN61204-3, heavy industry level, criteria A | | | | | | | |
| OTHERS | MTBF | 301.7K hrs min. MIL-HDBK-217F (25℃) | | | | | | | |
| | DIMENSION | 40*90*100mm (W*H*D) | | | | | | | |
| | PACKING | 0.3Kg; 42pcs/13.6Kg/0.82CUFT | | | | | | | |
| NOTE | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. | | | | | | | | |

Case No.962A Unit:mm

Mechanical Specification

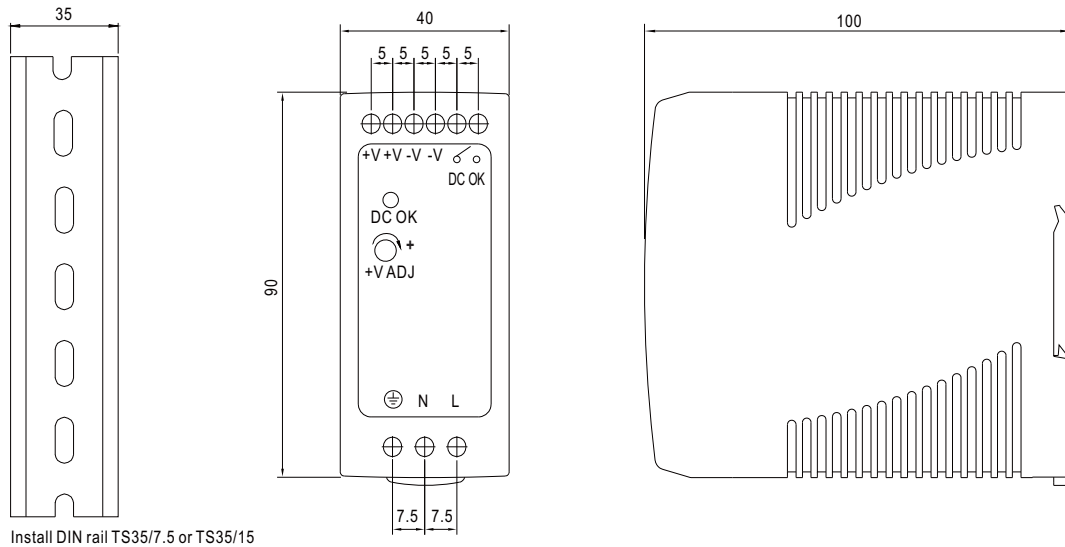


Block Diagram

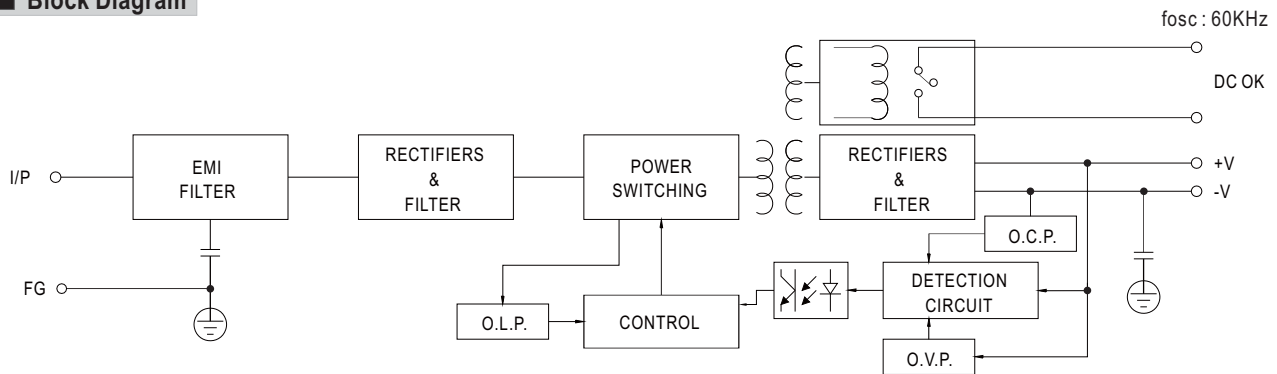

DC OK Relay Contact

| | |
|------------------------|--------------------------|
| Contact Close | PSU turns on / DC OK. |
| Contact Open | PSU turns off / DC Fail. |
| Contact Ratings (max.) | 30V/1A resistive load. |

Derating Curve

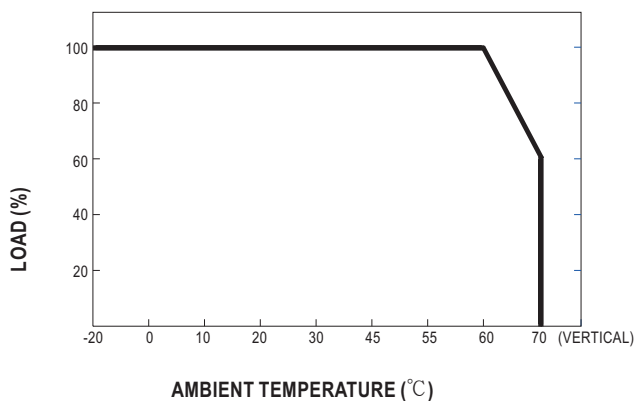

Output Derating VS Input Voltage

